



PRODUCT CATALOG

- Active Optical Components
- Passive Optical Components
- Copper Cabling Infrastructure
- Cabinet & Racks



www.hello-signal.com

HANGZHOU ZION COMMUNICATION CO.,LTD

About us

HANGZHOU ZION COMMUNICATION CO., LTD is a manufacturer and supplier of

Fiber systems & Copper cabling system products for ■ Telecommunication ■ Internet(ISP) ■ Data center
■ ICT infrastructure ■ Security & fire protection ■ Building & Entertainment ■ Green energy ■ Industrial.

■ Facts & Figures



■ Slogan

Good quality and good service based on reasonable prices.

■ Specialized in product

We provide products and services to our customers in 2 ways.

- ★ OEM customized production according to your requirements.
- ★ Standardized products and services according to our brand.



Fiber system & Copper cabling system products.
<https://hello-signal.com/>



Cable & Wire products.
<https://www.zion-communication.com/>

■ Why Chose Zion Comm. As Your Honest Partner?

- ★ The production, technology, and management level of our factories are top world-class.
- ★ Flexibility in product type, quantity, delivery time, shipping, etc.
- ★ High-quality control standard: We have advanced testing equipment and strict factory inspection to ensure product compatibility and stability of use.
- ★ Plenty of Certificates of products and customs.
- ★ Professional expert team: Our experienced team of experts strives to service every inquiry, quote, and order quickly and efficiently. Also, we will help our customers with complex matters such as transportation, customs clearance, customs certification, etc..
- ★ **Our Efficiently Aim: 30% of Your Purchases, Just 1% of Your Time!**

Contents

Active Optical Components

■ Fiber Optic Transceivers	
800G OSFP	06
400G OSFP	07
100G QSFP28	08
40G QSFP+	09
10G SFP+	10
1.25G SFP	11
Copper Transceiver	12
Active Optical Cable (AOC)	13
Direct Attach Cable(DAC)	14

Passive Optical Components

■ Fiber Optic Splice Closure	
Fiber Optic Vertical Splice Closure	16
Fiber Optic Horizontal Splice Closure	23
■ Fiber Optical Terminal Box	
Fiber Distribution Box	31
Fiber Socket & Desktop Box	55
■ Fiber Optic Patch Panel	
Empty Fixed Rack mount Fiber patch panel	61
Full Fixed Rack mount Fiber patch panel	62
Empty Sliding Rail Fiber patch panel	68
Full Loaded Sliding Rail Rack Mount Fiber Patch Panel	69
Fiber Optic Adapter Panel	74
■ Fiber Optic Patch Cord/Pigtail	
Fiber Optic Patch Cord	81
Fiber Optic Pigtail	87
■ MPO/MTP	
MPO/MTP Patch Cord	90
MPO/MTP Fiber Optic Loopback	93
MPO/MTP (Male) -LC Fan-out 0.9mm	95
MPO/MTP-LC Straight harness Cables 2.0mm	96
MPO/MTP Fiber Optic Trunk Cable	98
MPO/MTP-LC Patch Panel(UHD/FHD)	99
■ WDM Multiplexers	100
■ Fiber Optic Splitter	101
■ Fiber Optic Connector	104
■ Fiber Optic Adapter	105
■ Fiber Optic Attenuator	113
■ Fiber Optic Cable Fittings	114

Copper Cabling Infrastructure

■ Bulk Ethernet Cables	120
■ Copper Patch Cord	122
■ Copper Patch Panel	125
■ Keystone Jacks	129
■ Ethernet Coupler/ RJ45 Coupler	133
■ Modular Plug/ RJ connector	135
■ Free Pressure Toolless Plug	137
■ Network Faceplate	138
■ RJ45 Surface Box	143
■ Copper Trunk Cables	145
■ Networking tools & Accessories	146

Cabinet and Racks

■ Service Cabinet	
VE Service Cabinet	148
IDC Service Cabinet	152
■ Network Cabinet	
601S Network Cabinet	154
PE Network Cabinet	158
TE Network Cabinet	161
■ Wall Mount Rack Cabinet	
SE Wall Mount Rack Cabinet	163
EW Wall Mount Rack Cabinet	165
SA Wall Mount Rack Cabinet	167
SB Wall Mount Rack Cabinet	169
SQ Wall Mount Rack Cabinet	171
VA Wall Mount Rack Cabinet	173
■ Racks	
605 Data Racks	175
606 Open Racks	177
■ Cabinet Fitting	
Wall Mount Bracket	179
PDU	180
Cooling	182
Shelf	183
Cable Manager	186
Drawer & Plinth	187
TC Digital Temperature Unit	188
Screws, Nuts & Locks	189



ACTIVE OPTICAL COMPONENTS



Fiber Optic Transceivers



800G OSFP112

Application

- 800GBASE-SR8 800G Ethernet
- 800G Datacom connections

Feature

- 8x100G PAM4 retimed 800GAUI-8 electrical interface
- Dual MPO-12 APC connector and MPO16 APC connector are provided
- 8 channel VCSEL arrays and 8 channels PIN photo detector arrays
- Maximum link length of 60m on OM3 or 100m on OM4
- Hot Pluggable OSFP form factor
- Compliant to OSFP Module Specification Rev 5.0
- Compliant with CMIS 5.2
- Compliant with IEEE 802.3db
- Compliant to IEEE 802.3ck
- Less than 14W in temperature range of 0 to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Fiber	Data Rate	Wavelength	Reach	Transmitter	Transmit Power	Receiver	Receiver Sensitivity
7211001	800G-SR8	OSFP112	MPO/MTP	MMF	800G	850nm	60m/OM3 100m/OM4	VCSEL	- 8.4 ~ +2.4 dBm	PIN	- 10.3 ~ +2.4 dBm

400G OSFP112

Application

- 400GBASE-SR8 800G Ethernet
- 400G Datacom connections

Feature

- 4x100G PAM4 retimed 800GAUI-8 electrical interface
- Dual MPO-12 APC connector and MPO16 APC connector are provided
- 4 channel VCSEL arrays and 8 channels PIN photo detector arrays
- Maximum link length of 60m on OM3 or 100m on OM4
- Hot Pluggable OSFP form factor
- Compliant to OSFP Module Specification Rev 5.0
- Compliant with CMIS 5.2
- Compliant with IEEE 802.3db
- Compliant to IEEE 802.3ck
- Less than 14W in temperature range of 0 to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Fiber	Data Rate	Wavelength	Reach	Transmitter	Transmit Power	Receiver	Receiver Sensitivity
7211005	400G-SR4	OSFP112	MPO/MTP	MMF	400G	850nm	60m/OM3 100m/OM4	VCSEL	- 8.4 ~ +2.4 dBm	PIN	- 10.3 ~ +2.4 dBm

100G QSFP28

Application

- 100G Ethernet; InniBand QDR; 100G Datacom connections; SDH/SONET; Data Center...

Feature

- Up to 27.952Gbps per channel bandwidth
- Compliant QSFP28 MSA, IEEE 802.3bm 100GBASE-SR4/LR4/ER4,OTN OTU3/OUT4"
- Hot-pluggable electrical interface
- Digital diagnostic SFF-8436 compliant
- 4 channels full-duplex
- Single +3.3V power supply operating
- Commercial Temperature range 0°C to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Fiber	Data Rate	Wavelength	Reach	Transmitter	Transmit Power	Receiver	Receiver Sensitivity
7211010	100G-SR4	QSFP28	MPO	MMF	100G	850nm	100m	VCSEL	- 8.4 ~ +2.4 dBm	PIN	- 10.3 ~ +2.4 dBm
7211020	100G-PSM4	QSFP28	MPO	SMF	100G	1310nm	2km	FP	- 9.4 ~ +2 dBm	PIN	- 12.6 ~ +2 dBm
7211030	100G-LR4	QSFP28	LC	SMF	100G	CWDM	2km	EML	- 4.3 ~ +4.5 dBm	PIN	- 10.6 ~ +4.5 dBm
7211050	100G-LR4	QSFP28	LC	SMF	100G	LWDN	10km	EML	- 4.3 ~ +4.5 dBm	PIN	- 10.6 ~ +4.5 dBm
7211060	100G-ER4	QSFP28	LC	SMF	100G	1294-1310 nm	30KM 40km	EML	- 2.9 ~ +4.5 dBm - 2.9 ~ +2.9dBm	PIN	- 15 ~ +4 dBm - 21 ~ +3 dBm
7211070	100G-ZR4	QSFP28	LC	SMF	100G	1294-1310 nm	80km	EML	2 ~ +26.5 dBm	PIN	- 28 ~ +3.5 dBm

40G QSFP+

Application

- 40G Ethernet; InniBand SDR,DDR,QDR; Server-server clusters; Supercomputing interconnections; Data Center...

Feature

- Up to 11.2Gbps per channel bandwidth
- Compliant QSFP MSA, IEEE 802.3ba 40GBASE-SR4/LR4/ER4"
- Hot pluggable electrical interface
- Digital diagnostic SFF-8436 compliant
- 4 channels full-duplex
- Single +3.3V power supply operating
- Commercial Temperature range 0°C to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Fiber	Data Rate	Wavelength	Reach	Transmitter	Transmit Power	Receiver	Receiver Sensitivity
7212010	40G-SR4	QSFP+	MPO	MMF	40G	850nm	150m	VCSEL	- 7.6 ~ +2.4 dBm	PIN	- 5.4 ~ +2.4 dBm
7212020	40G-SR4 Bidi	QSFP+	LC	MMF	40G	850/900nm	100m	VCSEL	- 4 ~ +5 dBm	PIN	- 6 ~ +2.4 dBm
7212030	40G-SR4	QSFP+	LC	MMF	40G	850nm	400m	VCSEL	- 7.6 ~ +2.4 dBm	PIN	- 5.4 ~ +2.4 dBm
7212050	40G-LR4	QSFP+	LC	SMF	40G	CWDM	2km	DFB	- 7.0 ~ +2.3 dBm	PIN	- 12.5 ~ +2.3 dBm
7212060	40G-LR4	QSFP+	LC	SMF	40G	CWDM	10km	DFB	- 7.0 ~ +2.3 dBm	PIN	- 12.5 ~ +2.3 dBm
7212070	40G-ER4	QSFP+	LC	SMF	40G	CWDM	40km	DFB	- 1.7 ~ +4.5 dBm	PIN	- 19.5 ~ +4.5 dBm
7212080	40G-PSM4	QSFP+	MPO	SMF	40G	PSM4	2km	FP		PIN	
7212090	40G-PSM4	QSFP+	MPO	SMF	40G	PSM4	10km	FP		PIN	



10G SFP+

Application

- 10G Ethernet; Supercomputing interconnections; Data Center...

Feature

- Up to 11.2Gbps per channel bandwidth
- Compliant SFP+ MSA, IEEE 802.3ae 10GBASE-SR4/LR4/ER4
- Hot pluggable electrical interface
- Digital diagnostic SFF-8431 compliant
- Single +3.3V power supply operating
- Commercial Temperature range 0°C to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Fiber	Data Rate	Wavelength	Reach	Transmitter	Transmit Power	Receiver	Receiver Sensitivity
7213010	10G-SR	SFP+	LC	MMF	10G	850nm	300m	VCSEL	- 7.3 ~ +1 dBm	PIN	- 11.1 ~ +0.5 dBm
7213020	10G-LR	SFP+	LC	SMF	10G	1310nm	10km	DFB	- 8.2 ~ +0.5 dBm	PIN	- 14.4 ~ +0.5 dBm
7213030	10G-ER	SFP+	LC	SMF	10G	1550nm	40km	EML	- 1 ~ +4 dBm	PIN	- 16 ~ +0.5 dBm
7213040	10G-ZR	SFP+	LC	SMF	10G	1550nm	80km	EML	0 ~ +4 dBm	APD	- 23 ~ -6 dBm
7213050	10G-LR BiDi	SFP+	LC	SMF	10G	1270/1330nm	10km	DFB	-6 ~ +0.5 dBm	PIN	- 15 ~ +0.5 dBm
7213060	10G-LR BiDi	SFP+	LC	SMF	10G	1270/1330nm	20km	DFB	-3 ~ +3 dBm	PIN	- 15 ~ +0.5 dBm
7213070	10G-ER BiDi	SFP+	LC	SMF	10G	1270/1330nm	40km	DFB	0 ~ +5 dBm	PIN	- 15 ~ +0.5 dBm
7213080	10G-ER BiDi	SFP+	LC	SMF	10G	1270/1330nm	60km	DFB	0 ~ +5 dBm	APD	- 23 ~ -6 dBm
7213090	10G-ZR BiDi	SFP+	LC	SMF	10G	1490/1550nm	80km	EML	0 ~ +4 dBm	APD	- 24 ~ -6 dBm
7213110	10G-CWDM	SFP+	LC	SMF	10G	CWDM	10km	DFB	-8.2 ~ +0.5 dBm	PIN	- 14.4 ~ +0.5 dBm
7213120	10G-CWDM	SFP+	LC	SMF	10G	CWDM	20km	DFB	-6 ~ +2 dBm	PIN	- 14.4 ~ +0.5 dBm
7213130	10G-CWDM	SFP+	LC	SMF	10G	CWDM	40km	DFB	0 ~ +5 dBm	PIN	- 14.4 ~ +0.5 dBm
7213140	10G-CWDM	SFP+	LC	SMF	10G	CWDM	80km	DFB	0 ~ +4 dBm	PIN	- 23 ~ -6 dBm
7213210	10G-DWDM	SFP+	LC	SMF	10G	DWDM	40km	EML	-1 ~ +4 dBm	PIN	- 16 ~ -0.5 dBm
7213220	10G-DWDM	SFP+	LC	SMF	10G	DWDM	80km	EML	-1 ~ +4 dBm	APD	- 24 ~ -6 dBm

1.25G SFP

Application

- 1G Ethernet; Switch to Switch Interface; Gigabit Ethernet; Switched Backplane Applications; Router/Server Interface; Other Optical Links.

Feature

- Up to 1.25Gbps per channel bandwidth
- Compliant SFP MSA, IEEE 802.3z 1000BASE-SX/LX/ZX
- Hot pluggable electrical interface
- Single +3.3V power supply operating



Zion Code	Name	Package	Connector	Fiber	Data Rate	Wavelength	Reach	Transmitter	Transmit Power	Receiver	Receiver Sensitivity
7214010	1.25G-SX	SFP	LC	MMF	1.25G	850nm	550m	VCSEL	- 9.5 ~ -3 dBm	PIN	- 21 ~ 0 dBm
7214020	1.25G-LX	SFP	LC	SMF	1.25G	1310nm	10km	FP	- 9.5 ~ -3 dBm	PIN	- 25 ~ -3 dBm
7214030	1.25G-LX/LH	SFP	LC	SMF	1.25G	1310nm	20km	FP	- 9 ~ -3 dBm	PIN	- 25 ~ -3 dBm
7214040	1.25G-EX	SFP	LC	SMF	1.25G	1310nm	40km	DFB	- 4 ~ -3 dBm	PIN	- 25 ~ -3 dBm
7214050	1.25G-EX	SFP	LC	SMF	1.25G	1550nm	40km	DFB	- 7 ~ 0 dBm	PIN	- 25 ~ -3 dBm
7214060	1.25G-ZX	SFP	LC	SMF	1.25G	1550nm	80km	DFB	- 3 ~ 3 dBm	PIN	- 26 ~ -3 dBm
7214070	1.25G-ZX	SFP	LC	SMF	1.25G	1550nm	120km	DFB	0 ~ 5 dBm	APD	- 34 ~ -9 dBm
7214080	1.25G-ZX	SFP	LC	SMF	1.25G	1550nm	160km	DFB	1 ~ 6 dBm	APD	- 34 ~ -9 dBm
7214110	1.25G BiDi	SFP	LC	SMF	1.25G	1310/1550nm	10km	DFB	-9 ~ -3 dBm	PIN	- 21 ~ -3 dBm
7214120	1.25G BiDi	SFP	LC	SMF	1.25G	1310/1550nm	20km	DFB	-9 ~ -3 dBm	PIN	- 25 ~ -3 dBm
7214130	1.25G BiDi	SFP	LC	SMF	1.25G	1310/1550nm	40km	DFB	-4 ~ 3 dBm	PIN	- 25 ~ -3 dBm
7214140	1.25G BiDi	SFP	LC	SMF	1.25G	1490/1550nm	80km	DFB	-2 ~ 3 dBm	PIN	- 25 ~ -3 dBm
7214150	1.25G BiDi	SFP	LC	SMF	1.25G	1490/1550nm	120km	DFB	-1 ~ 4 dBm	PIN	- 31 ~ -9 dBm
7214210	1.25G CWDM	SFP	LC	SMF	1.25G	CWDM	20km	DFB	-5 ~ 0 dBm	PIN	- 24 ~ -4 dBm
7214220	1.25G CWDM	SFP	LC	SMF	1.25G	CWDM	40km	DFB	-5 ~ 0 dBm	PIN	- 24 ~ -4 dBm
7214230	1.25G CWDM	SFP	LC	SMF	1.25G	CWDM	80km	DFB	0 ~ 5 dBm	PIN	- 24 ~ -4 dBm
7214240	1.25G CWDM	SFP	LC	SMF	1.25G	CWDM	120km	DFB	0 ~ 5 dBm	APD	- 30 ~ -8 dBm
7214250	1.25G CWDM	SFP	LC	SMF	1.25G	CWDM	160km	DFB	2 ~ 6 dBm	APD	- 34 ~ -9 dBm
7214310	1.25G DWDM	SFP	LC	SMF	1.25G	DWDM	40km	DFB	0 ~ 5 dBm	PIN	- 24 ~ -4 dBm
7214320	1.25G DWDM	SFP	LC	SMF	1.25G	DWDM	80km	DFB	0 ~ 5 dBm	PIN	- 24 ~ -4 dBm
7214330	1.25G DWDM	SFP	LC	SMF	1.25G	DWDM	120km	DFB	2 ~ 6 dBm	APD	- 31 ~ -9 dBm

Copper Transceiver

Application

- 1000BASE Ethernet

Feature

- Data Rate: 10/100/1000M
- Compliant Copper SFP
- Compliant IEEE802.3ab standard
- Hot pluggable SFP footprint
- Compact RJ-45 connector assembly
- It supports RX_LOS(Loss of Signal) function
- Access to physical layer IC via 2-wire serial bus
- Commercial Temperature range 0°C to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Transmission Media	Data Rate	Reach
7215010	Copper-T	SFP	RJ-45	Cat 5e/6/6a	10/100BASE	100m
7215020	Copper-T	SFP	RJ-45	Cat 5e/6/6a	10/100/1000BASE	100m
7215030	Copper-T	SFP	RJ-45	Cat 5e/6/6a	1000BASE	100m
7215040	Copper-T	SFP	RJ-45	Cat 5e/6/6a	10G	30m

Active Optical Cable

Application

- 10G/25G/40G/100G/400G/800G Ethernet; Data Center; Fibre channel and other optical links

Feature

- Contain 10G/25G/40G/100G/400G/800G AOC and Breakout AOC
- Digital diagnostic functions
- Transmit distance 1-100m
- Meet EMI,ESD
- Single +3.3V power supply operating
- Commercial Temperature range 0°C to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Fiber	Data Rate	Wavelength	Reach	Transmitter	Receiver
7216120	800G AOC	OSFP 2*OSFP	AOC	MMF	800G	850nm	100m	VCSEL	PIN
7216110	800G AOC	OSFP to OSFP	AOC	MMF	800G	850nm	100m	VCSEL	PIN
7216100	800G AOC	QSFP-DD to QSFP-DD	AOC	MMF	800G	850nm	100m	VCSEL	PIN
7216090	800G AOC	OSFP to 2*QSFP-56	AOC	MMF	800G	850nm	100m	VCSEL	PIN
7216080	400G AOC	OSFP to OSFP SR4	AOC	MMF	400G	850nm	100m	VCSEL	PIN
7216070	400G AOC	OSFP to OSFP SR4	AOC	MMF	400G	850nm	100m	VCSEL	PIN
7216060	400G AOC	QSFP-DD to QSFP-DD	AOC	MMF	400G	850nm	100m	VCSEL	PIN
7216010	100G AOC	QSFP28	AOC	MMF	100G	850nm	100m	VCSEL	PIN
7216020	100G AOC Breakout	QSFP28 to 4xSFP28	AOC	MMF	100G to 25G	850nm	100m	VCSEL	PIN
7216030	40G AOC	QSFP+	AOC	MMF	40G	850nm	100m	VCSEL	PIN
7216040	40G AOC Breakout	QSFP+ to 4xSFP+	AOC	MMF	40G to 10G	850nm	100m	VCSEL	PIN
7216050	25G AOC	SFP28	AOC	MMF	25G	850nm	100m	VCSEL	PIN

Direct Attach Cable

Application

- 10G/25G/40G/100G/400G/800G Ethernet; Data Center; Fibre channel and other optical links

Feature

- Contain 10G/25G/40G/100G/400G/800G DAC and Breakout DAC
- Digital diagnostic functions
- Transmit distance 1-5m,1-10m
- Meet EMI
- Commercial Temperature range 0°C to 70°C
- RoHS Compliant Part



Zion Code	Name	Package	Connector	Data Rate	Cable Type	Wire AWG	Power Supply	Reach
7217080	400G DAC	400G QSFP-DD to 8*SFP56	DAC	400G	Passive Twinax	24-30AWG	3.3 V	10m
7217070	400G DAC	400G QSFP-DD to QSFP-DD	DAC	400G	Passive Twinax	24-30AWG	3.3 V	10m
7217010	100G DAC	QSFP28	DAC	100G	Passive Twinax	25-30AWG	3.3 V	5m
7217020	100G DAC Breakout	QSFP28 to 4xSFP28	DAC	100G to 25G	Passive Twinax	25-30AWG	3.3 V	5m
7217030	40G DAC	QSFP+	DAC	40G	Passive Twinax	24-30AWG	3.3 V	10m
7217040	40G DAC Breakout	QSFP+ to 4xSFP+	DAC	40G to 10G	Passive Twinax	24-30AWG	3.3 V	10m
7217050	25G DAC	SFP28	DAC	25G	Passive Twinax	26-30AWG	3.3 V	5m
7217060	10G DAC	SFP+	DAC	10G	Passive Twinax	24-30AWG	3.3 V	10m

PASSIVE OPTICAL COMPONENTS



Fiber Optic Vertical Splice Closure



24/48 cores Fiber Optic Vertical Splice Closure-ZC-FV101H (7231216)

Model No.	ZC-FV101H (7231216)
Color	Black
Capacity	24 Cores (6C × 4PCS Splice Trays) 48 Cores (12C × 4PCS Splice Trays)
Splice Tray	Max 6 or 12 Cores/1 PC, Size:110*92*10mm
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+3
OD of Ports	Small round ports: 3×OD 21mm Large oval port: 1×OD 34×21mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	300*190
Net weight /1 PC (MAX)	1.13 kgs
Gross Weight/1 Carton	12.5 kgs
PCS/1 Carton	8 pcs



24/48 cores Fiber Optic Vertical Splice Closure-ZC-FV101M (7231217)

Model No.	ZC-FV101M(7231217)
Color	Black
Capacity	24 Cores (6C × 4PCS Splice Trays) 48 Cores (12C × 4PCS Splice Trays)
Splice Tray	Max 6 or 12 Cores/1 PC, Size:110*92*10mm
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Mechanical seal (M)
Inlet/outlet	2+2
OD of Ports	Small round ports: 4×OD 21mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	300*190
Net weight /1 PC (MAX)	1.13 kgs
Gross Weight/1 Carton	12.5 kgs
PCS/1 Carton	8 pcs



96/144 cores Fiber Optic Vertical Splice Closure-ZC-FV102H (7231218)

Model No.	ZC-FV102H(7231218)
Color	Black
Capacity	96 Cores (24C × 4PCS Splice Trays) 144 Cores (24C × 6PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC, Size:230*92*10mm
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+3
OD of Ports	Small round ports: 3×OD 24mm Large oval port: 1×OD 40×28mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	420*205
Net weight /1 PC (MAX)	1.96 kgs
Gross Weight/1 Carton	22 kgs
PCS/1 Carton	8 pcs



96/144 cores Fiber Optic Vertical Splice Closure-ZC-FV102M (7231219)

Model No.	ZC-FV102M(7231219)
Color	Black
Capacity	96 Cores (24C × 4PCS Splice Trays) 144 Cores (24C × 6PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC, Size:230*92*10mm
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Mechanical seal (M)
Inlet/outlet	2+2
OD of Ports	4 small round ports(16mm)
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	420*205
Net weight /1 PC (MAX)	1.96 kgs
Gross Weight/1 Carton	22 kgs
PCS/1 Carton	8 pcs



96/144 cores Fiber Optic Vertical Splice Closure-ZC-FV103H (7231220)

Model No.	ZC-FV103H(7231220)
Color	Black
Capacity	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC, Size:230*92*10mm
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+4
OD of Ports	Small round ports: 4×OD 21mm
	Large oval port: 1×OD 58×30mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	420*205
Net weight /1 PC (MAX)	1.66 kgs
Gross Weight/1 Carton	22 kgs
PCS/1 Carton	8 pcs



8/16/32 cores Fiber Optic Vertical Splice Closure-ZC-FV104-PLC (7231221)

Model No.	ZC-FV104-PLC(7231221)
Color	Black
Capacity	8 Cores (1 PC 1*8 Mini PLC)
	16 Cores (1 PC 1*16 Mini PLC)
	32 Cores (1 PC 1*32 Mini PLC)
Splice Tray	Max 24 Cores/1 PC, Size:230*92*10mm
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+4
OD of Ports	Small round ports: 3×OD 21mm
	Large oval port: 1×OD 58×30mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	420*205
Net weight /1 PC (MAX)	1.96 kg
Gross Weight/1 Carton	22 kg
PCS/1 Carton	8 pcs



24/48 cores Fiber Optic Vertical Splice Closure-ZC-FV105H (7231222)

Model No.	ZC-FV105H(7231222)
Color	Black
Capacity	24 Cores (12C × 2PCS Splice Trays)
	48 Cores (24C × 2PCS Splice Trays)
Splice Tray	Max 12 or 24 Cores/1 PC, Size:110*92*10mm
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+3
OD of Ports	Small round ports: 3×OD 21mm
	Large oval port: 1×OD 50×30mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	330*140
Net weight /1 PC (MAX)	0.95 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	15 pcs



96/144/288 cores Fiber Optic Vertical Splice Closure-ZC-FV106H (7231223)

Model No.	ZC-FV106H(7231223)
Color	Black
Capacity	96 Cores (48C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (48C × 3PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
	288 Cores (48C × 6PCS Splice Trays)
Splice Tray	Max 24 or 48 Cores/1 PC
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+6
OD of Ports	Small round ports: 6×OD 21mm
	Large oval port: 1×OD 65×45mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	470*220
Net weight /1 PC (MAX)	2.15 kgs
Gross Weight/1 Carton	18 kgs
PCS/1 Carton	6 pcs



96/144/288 cores Fiber Optic Vertical Splice Closure-ZC-FV106M (7231224)

Model No.	ZC-FV106M(7231224)
Color	Black
Capacity	96 Cores (48C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (48C × 3PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
	288 Cores (48C × 6PCS Splice Trays)
Splice Tray	Max 24 or 48 Cores/1 PC
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Mechanical seal (M)
Inlet/outlet	2+4
OD of Ports	Small round ports: 6×OD 18mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	470*220
Net weight /1 PC (MAX)	2.15 kgs
Gross Weight/1 Carton	18 kgs
PCS/1 Carton	6 pcs



96/144/288 cores Fiber Optic Vertical Splice Closure-ZC-FV107H (7231225)

Model No.	ZC-FV107H(7231225)
Color	Black
Capacity	96 Cores (48C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (48C × 3PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
	288 Cores (48C × 6PCS Splice Trays)
Splice Tray	Max 24 or 48 Cores/1 PC
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+4
OD of Ports	Small round ports: 6×OD 21mm Large oval port: 1×OD 65×45mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	470*220
Net weight /1 PC (MAX)	2.15 kgs
Gross Weight/1 Carton	18 kgs
PCS/1 Carton	6 pcs



96/144/288 cores Fiber Optic Vertical Splice Closure-ZC-FV108H(7231226)

Model No.	ZC-FV108H(7231226)
Color	Black
Capacity	96 Cores (48C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (48C × 3PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
	288 Cores (48C × 6PCS Splice Trays)
Splice Tray	Max 24 or 48 Cores/1 PC
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Heat-shrink seal (H)
Inlet/outlet	1+4
OD of Ports	Small round ports: 6×OD 21mm
	Large oval port: 1×OD 65×45mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	470*220
Net weight /1 PC (MAX)	2.15 kgs
Gross Weight/1 Carton	18 kgs
PCS/1 Carton	6 pcs



96/144/288 cores Fiber Optic Vertical Splice Closure-ZC-FV108M(7231228)

Model No.	ZC-FV108M(7231228)
Color	Black
Capacity	96 Cores (48C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (48C × 3PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
	288 Cores (48C × 6PCS Splice Trays)
Splice Tray	Max 24 or 48 Cores/1 PC
Protection Level	IP68
Material	PP
Sealing Method For Inlets	Mechanical seal (M)
Inlet/outlet	2+4
OD of Ports	Small round ports: 6×OD 18mm
Temperature	-40°C~+60°C
Relative humidity	≤95% (at 40°C)
Atmospheric pressure	70kPa ~106kPa
Dimension(MM)	470*220
Net weight /1 PC (MAX)	2.15 kgs
Gross Weight/1 Carton	18 kgs
PCS/1 Carton	6 pcs




Fiber Distribution Point (Pedestal)-ZC-FV109 (7231229)

Model No.	ZC-FV109(7231229)
Color	Green
Material	HDPE, Wet-proof , water-proof, dust-proof , anti-aging
Protection Level	IP65
Working temperature	-10℃~+80℃
Relative humidity	≤95% (at 40℃)
Atmospheric pressure	70kPa ~106kPa
Life of insertion and extraction	> 1000



FTTH Tools Equipment-ZC-FV110 (7231230)

Model No.	ZC-FV110(7231230)
Color	Green
Material	HDPE, Wet-proof , water-proof, dust-proof , anti-aging
Protection Level	IP55
Working temperature	-10℃~+80℃
Relative humidity	≤95% (at 40℃)
Atmospheric pressure	70kPa ~106kPa
Size (mm)	Φ 770×380×145



Fiber Optic Horizontal Splice Closure



24/48/96 Fiber Optic Horizontal Closure-ZC-FH001 (7231121)

Model No.	ZC-FH001 (723112)
Color	Black
Capacity	24 Cores (12C × 2PCS Splice Trays)
	48 Cores (12C × 4PCS Splice Trays)
	96 Cores (12C × 8PCS Splice Trays)
Splice Tray	Max 12 Cores/1 PC
Protection Level	IP68
Material	PP
Inlet/outlet	2+2
OD of Ports	φ 26mm
Dimension(L*W*D,MM)	480*155*110
Net weight /1 PC (MAX)	2.3 kgs




24 cores Fiber Optic Horizontal Closure-ZC-FH002 (7231122)

Model No.	ZC-FH002 (7231122)
Color	Black
Capacity	24 Cores (24C × 1 PC Splice Tray)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	PP or ABS
Inlet/outlet	2+2
OD of Ports	φ 16mm
Dimension(L*W*D,MM)	320*150*70
Net weight /1 PC (MAX)	0.6 kgs



48/96/144 cores Fiber Optic Horizontal Closure-ZC-FH003 (7231123)

Model No.	ZC-FH003 (7231123)
Color	Black
Capacity	48 Cores (24C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	Strengthen PP,PC
Inlet/outlet	3+3
OD of Ports	A:φ 11mm B:φ 16mm C:φ 23mm
Dimension(L*W*D,MM)	445*220*110
Net weight /1 PC (MAX)	2.15 kgs

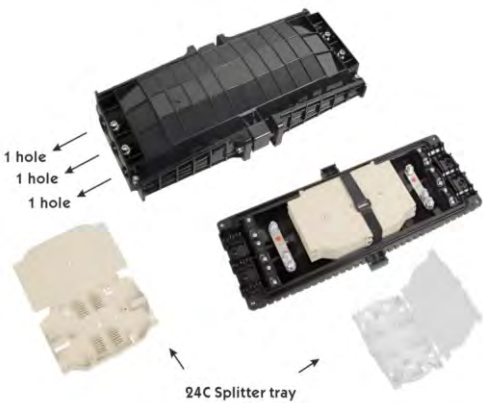

24/36 Cores Fiber Optic Horizontal Closure-ZC-FH004 (7231124)

Model No.	ZC-FH004 (7231124)
Color	Black
Capacity	24 Cores (12C × 2PCS Splice Trays)
	36 Cores (12C × 3PCS Splice Trays)
Splice Tray	Max 12 Cores/1 PC
Protection Level	IP68
Material	Strengthen PP+GF
Inlet/outlet	2+2
OD of Ports	φ 17.5mm
Dimension(L*W*D,MM)	270*110*90
Net weight /1 PC (MAX)	1.55 kgs



24/48/96 Fiber Optic Horizontal Closure-ZC-FH005 (7231125)

Model No.	ZC-FH005 (7231125)
Color	Black
Capacity	24 Cores (24C × 1 PC Splice Tray)
	48 Cores (24C × 2PCS Splice Trays)
	96 Cores (24C × 3PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	Strengthen ABS or ABS+PC
Inlet/outlet	3+3
OD of Ports	A:φ 13mm B:φ 16mm C:φ 20mm
Dimension(L*W*D,MM)	300*200*80
Net weight /1 PC (MAX)	1.11 kgs



48/96 Fiber Optic Horizontal Closure-ZC-FH006 (7231126)

Model No.	ZC-FH006 (7231126)
Color	Black
Capacity	48 Cores (12C × 4PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
Splice Tray	Max 12 or 24 Cores/1 PC
Protection Level	IP68
Material	Strengthen ABS
Inlet/outlet	2+2
OD of Ports	φ 26mm
Dimension(L*W*D,MM)	280*200*90
Net weight /1 PC (MAX)	1.01 kgs




24/48/96 Fiber Optic Horizontal Closure-ZC-FH007 (7231127)

Model No.	ZC-FH007 (7231127)
Color	Black
Capacity	24 Cores (24C × 1 PC Splice Tray)
	48 Cores (24C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	Strengthen PP or ABS
Inlet/outlet	2+2
OD of Ports	φ 20mm
Dimension(L*W*D,MM)	210*210*58
Net weight /1 PC (MAX)	0.7 kgs




48/96 Fiber Optic Horizontal Closure-ZC-FH008 (7231128)

Model No.	ZC-FH008 (7231128)
Color	Black
Capacity	48 Cores (12C × 4PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
Splice Tray	Max 12 or 24 Cores/1 PC
Protection Level	IP68
Material	ABS+PC
Inlet/outlet	2+2
OD of Ports	φ 16mm
Dimension(L*W*D,MM)	340*160*70
Net weight /1 PC (MAX)	1.11 kgs

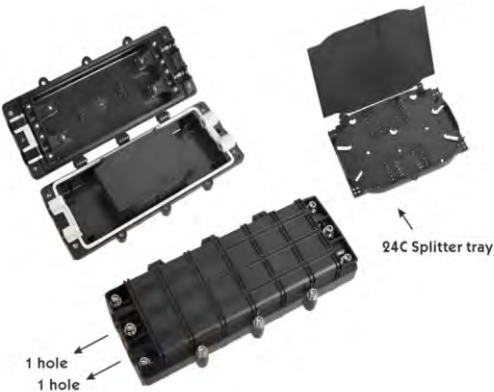

288 cores Fiber Optic Horizontal Closure-ZC-FH009 (7231129)

Model No.	ZC-FH009 (7231129)
Color	Black
Capacity	144 Cores (48C × 3PCS Splice Trays)
	288 Cores (48C × 6PCS Splice Trays)
Splice Tray	Max 48 Cores/1 PC
Protection Level	IP68
Material	Strengthen PC
Inlet/outlet	3+3
OD of Ports	φ 28mm
Dimension(L*W*D,MM)	560*240*130
Net weight /1 PC (MAX)	5.35 kgs

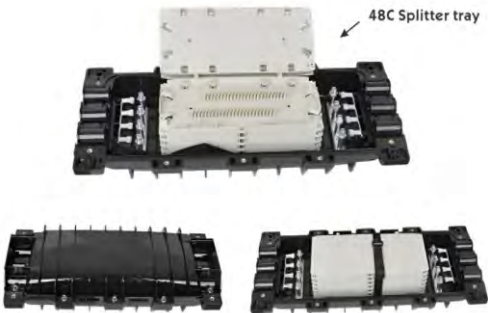

24/48/96 cores Fiber Optic Horizontal Closure-ZC-FH010 (7231130)

Model No.	ZC-FH010 (7231130)
Color	Black
Capacity	24 Cores (24C × 1 PC Splice Tray)
	48 Cores (24C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	ABS、PP
Inlet/outlet	2+2
OD of Ports	φ 14mm
Dimension(L*W*D,MM)	440*170*110
Net weight /1 PC (MAX)	1.65 kgs



24/48/96 cores Fiber Optic Horizontal Closure-ZC-FH011 (7231131)

Model No.	ZC-FH011 (7231131)
Color	Black
Capacity	24 Cores (24C × 1 PC Splice Tray)
	48 Cores (24C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	PC
Inlet/outlet	2+2
OD of Ports	φ 23mm
Dimension(L*W*D,MM)	430*190*110
Net weight /1 PC (MAX)	2.35 kgs



96/144 cores Fiber Optic Horizontal Closure-ZC-FH012 (7231132)

Model No.	ZC-FH012 (7231132)
Color	Black
Capacity	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	PC
Inlet/outlet	2+2
OD of Ports	A:φ 23mm B:φ 23mm
Dimension(L*W*D,MM)	430*190*140
Net weight /1 PC (MAX)	2.45 kgs



24/48/96 cores Fiber Optic Horizontal Closure-ZC-FH013 (7231133)

Model No.	ZC-FH013 (7231133)
Color	Black
Capacity	24 Cores (24C × 1 PC Splice Tray)
	48 Cores (24C × 2PCS Splice Trays)
	96 Cores (24C × 4PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	PC
Inlet/outlet	3+3
OD of Ports	A:φ 16mm B:φ 20mm C:φ 25mm
Dimension(L*W*D,MM)	430*190*110
Net weight /1 PC (MAX)	2.35 kgs



96/144 cores Fiber Optic Horizontal Closure-ZC-FH014 (7231134)

Model No.	ZC-FH014 (7231134)
Color	Black
Capacity	96 Cores (24C × 4PCS Splice Trays)
	144 Cores (24C × 6PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	PC
Inlet/outlet	3+3
OD of Ports	A:φ 16mm B:φ 20mm C:φ 25mm
Dimension(L*W*D,MM)	430*190*140
Net weight /1 PC (MAX)	2.35 kgs



48/96 cores Fiber Optic Horizontal Closure-ZC-FH015 (7231135)

Model No.	ZC-FH015 (7231135)
Color	Black
Capacity	48 Cores (24C × 2PCS Splice Trays) 96 Cores (24C × 4PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	PC
Inlet/outlet	4+4
OD of Ports	A:φ 16mm B:φ 20mm C:φ 20mm D:φ 16mm
Dimension(L*W*D,MM)	430*190*110
Net weight /1 PC (MAX)	2.45 kgs



96/144 cores Fiber Optic Horizontal Closure-ZC-FH016 (7231136)

Model No.	ZC-FH016 (7231136)
Color	Black
Capacity	96 Cores (24C × 4PCS Splice Trays) 144 Cores (24C × 6PCS Splice Trays)
Splice Tray	Max 24 Cores/1 PC
Protection Level	IP68
Material	PC
Inlet/outlet	4+4
OD of Ports	A:φ 16mm B:φ 20mm C:φ 20mm D:φ 16mm
Dimension(L*W*D,MM)	430*190*110
Net weight /1 PC (MAX)	2.45 kgs



Fiber Distribution Box



16 Cores IP68 Fiber Optic Distribution Box -ZC-FD200-A (7231250)

Model No.	ZC-FD200-A(7231250)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	4+16
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	3.8 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD200-A-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Adaptor (Max.)
	ZC-FD200-A-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD200-A-Blank



1x8 Mini PLC Splitter 1x16 Mini PLC Splitter SC Simplex Adaptor

16 Cores IP68 Fiber Optic Distribution Box -ZC-F200-B (7231251)

Model No.	ZC-F200-B(7231251)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	4+16
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	3.4 kgs
Gross Weight/1 Carton	15.4 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD200-B-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD200-B-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD200-B-Blank



1x8 Mini PLC Splitter 1x16 Mini PLC Splitter SC Simplex Adaptor

16 Cores IP68 Fiber Optic Distribution Box -ZC-FD200-C (7231252)

Model No.	ZC-FD200-C(7231252)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	4+16
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	3.4 kgs
Gross Weight/1 Carton	15.4 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD200-C-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD200-C-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD200-C-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

16 Cores IP68 Fiber Optic Distribution Box-ZC-FD200-D (7231253)

Model No.	ZC-FD200-D(7231253)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	4+16
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	3.4 kgs
Gross Weight/1 Carton	15.4 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD200-D-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD200-D-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD200-D-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

24 Cores IP68 Fiber Optic Distribution Box-ZC-FD200-E (7231254)

Model No.	ZC-FD200-E(7231254)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	2+24
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	3.8 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD200-E-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD200-E-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD200-E-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

24 Cores IP68 Fiber Optic Distribution Box -ZC-FD200-F (7231255)

Model No.	ZC-FD200-F(7231255)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	2+24
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	3.8 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD200-F-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD200-F-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor(Max.)
Empty (Without Mini PLC)	ZC-FD200-F-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP68 Fiber Optic Distribution Box -ZC-FD200-G (7231256)

Model No.	ZC-FD200-G(7231256)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	2+24
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	3.8 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD200-G-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD200-G-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD200-G-Blank



1x8 Mini PLC Splitter

1x16 Mini PLC Splitter

SC Simplex Adaptor

288 Cores IP68 Fiber Optic Distribution Box -ZC-FD200-H (7231257)

Model No.	ZC-FD200-H(7231257)
Color	Black, White..
Capacity	288 Cores (24C × 12PCS Splice Trays)
Protection Level	IP68
Inlet/outlet	4+4
Material	PP+GF
Dimension(L*W*D,MM)	385*240*128
Outer box size(MM)	520*420*310
Net weight /1 PC (MAX)	4.8 kgs
Gross Weight/1 Carton	21 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
NOS OF PLC	/
NOS OF Adaptor	/



8 Cores IP65 Fiber Optic Distribution Box -ZC-FD202 (7231259)

Model No.	ZC-FD202(7231259)
Color	Black, White..
Capacity	96 Cores (24C × 4PCS Splice Trays)
Protection Level	IP65
Inlet/outlet	4+8
Material	PP+GF
Dimension(L*W*D,MM)	340*210*90
Outer box size(MM)	580*375*450
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	16 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD202-1 Type1: 1 pc of 1x8 Mini PLC Splitter with 8 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD202-Blank



1x8 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD203 (7231260)

Model No.	ZC-FD203(7231260)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	340*210*90
Outer box size(MM)	545*310*450
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD203-1 Type1: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD203-Blank



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD204 (7231261)

Model No.	ZC-FD204(7231261)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	340*210*90
Outer box size(MM)	545*310*450
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD204-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD204-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD204-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD205-A (7231262)

Model No.	ZC-FD205-A(7231262)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	340*210*90
Outer box size(MM)	545*310*450
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD205-A-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD205-A-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD205-A-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD205-B (7231263)

Model No.	ZC-FD205-B(7231263)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	340*210*90
Outer box size(MM)	545*310*450
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD205-B-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD205-B-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD205-B-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

16 Core IP65 Fiber Optic Distribution Box -ZC-FD205-C (7231264)

Model No.	ZC-FD205-C(7231264)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	340*210*90
Outer box size(MM)	545*310*450
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD205-C-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD205-C-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD205-C-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16/24 Cores IP65 Fiber Optic Distribution Box -ZC-FD206 (7231265)

Model No.	ZC-FD206-C(7231264)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16 or 4+24
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	340*210*90
Outer box size(MM)	545*310*450
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD206-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD206-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD206-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

8 Cores IP65 Fiber Optic Distribution Box -ZC-FD207-SC (7231266)

Model No.	ZC-FD207-SC-A (7231266-A)
Color	Black, White..
Capacity	8 Cores (8C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+8
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	230*195*55
Outer box size(MM)	520*300*420
Net weight /1 PC (MAX)	0.55 kgs
Gross Weight/1 Carton	13 kgs
PCS/1 Carton	20 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD207-SC-A-1 (Cable Gland) ZC-FD207-SC-B-1 (Rubber Input) Type1: 1 pcs of 1x8 Mini PLC Splitter with 8 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD207-SC-A-Blank ZC-FD207-SC-B-Blank



Cable Gland ▶



Rubber Input ▶



1x8 Mini PLC Splitter



SC Simplex Adaptor

8 Core IP65 Fiber Optic Distribution Box -ZC-FD207-PLC (7231267)

Model No.	ZC-FD207-PLC-A (7231267-A)
Color	Black, White..
Capacity	8 Cores (8C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+8
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	230*195*55
Outer box size(MM)	520*300*420
Net weight /1 PC (MAX)	0.55 kgs
Gross Weight/1 Carton	13 kgs
PCS/1 Carton	20 pcs

Loaded Recommendations

Loaded with Module PLC	ZC-FD207-PLC-A-1 (Cable Gland) ZC-FD207-PLC-B-1 (Rubber Input) Type1: 1 pcs of 1x8 Module PLC Splitter
------------------------	--

Empty (Without Mini PLC)	ZC-FD207-PLC-A-Blank ZC-FD207-PLC-B-Blank
--------------------------	--



Cable Gland ▶



Rubber Input ▶



1x8 Module PLC Splitter

8 Cores IP65 Fiber Optic Distribution Box -ZC-FD207-Tray (7231268)

Model No.	ZC-FD207-Tray(7231268)
Color	Black, White..
Capacity	8 Cores (8C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+8
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	230*195*55
Outer box size(MM)	520*300*420
Net weight /1 PC (MAX)	0.55 kgs
Gross Weight/1 Carton	13 kgs
PCS/1 Carton	20 pcs

Loaded Recommendations

NOS OF PLC	/
NOS OF Adaptor	/



16 Core IP65 Fiber Optic Distribution Box -ZC-FD208 (7231269)

Model No.	ZC-FD208-A (7231269-A)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	300*220*80
Outer box size(MM)	530*320*520
Net weight /1 PC (MAX)	1.05 kgs
Gross Weight/1 Carton	14.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD208-A-1 (Cable Gland) ZC-FD208-B-1 (Rubber Input) Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD208-A-2 (Cable Gland) ZC-FD208-B-2 (Rubber Input) Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD208-A-Blank ZC-FD208-B-Blank

Cable Gland ▶



Rubber Input ▶



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Core IP65 Fiber Optic Distribution Box -ZC-FD209 (7231270)

Model No.	ZC-FD209-A(7231270-A)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	300*220*80
Outer box size(MM)	530*320*520
Net weight /1 PC (MAX)	1.05 kgs
Gross Weight/1 Carton	14.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD209-A-1 (Cable Gland) ZC-FD209-B-1 (Rubber Input) Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD209-A-2 (Cable Gland) ZC-FD209-B-2 (Rubber Input) Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD209-A-Blank ZC-FD209-B-Blank

Cable Gland ▶



Rubber Input ▶




1x8 Module PLC Splitter



1x16 Module PLC Splitter

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD210-SC (7231271)

Model No.	ZC-FD210-SC(7231271)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	300*220*80
Outer box size(MM)	530*320*520
Net weight /1 PC (MAX)	1.05 kgs
Gross Weight/1 Carton	14.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD210-SC-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD210-SC-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD210-SC-Blank

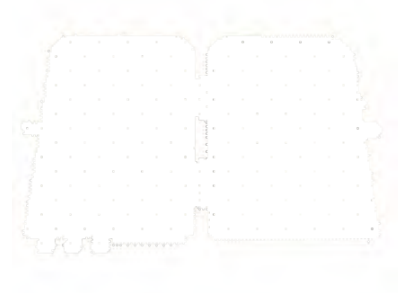

1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Core IP65 Fiber Optic Distribution Box -ZC-FD210-PLC (7231272)

Model No.	ZC-FD210-PLC(7231272)
Color	Black, White..
Capacity	16 Cores (16C × 1 PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	300*220*80
Outer box size(MM)	530*320*520
Net weight /1 PC (MAX)	1.05 kgs
Gross Weight/1 Carton	14.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD210-PLC-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD210-PLC-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD210-PLC-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

24 Cores IP65 Fiber Optic Distribution Box -ZC-FD211-SC (7231273)

Model No.	ZC-FD211-SC(7231273)
Color	Black, White..
Capacity	24 Cores (24C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+24
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	330*275*100
Outer box size(MM)	600*350*570
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	16.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD211-SC-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD211-SC-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD211-SC-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD211-PLC (7231274)

Model No.	ZC-FD211-PLC(7231274)
Color	Black, White..
Capacity	24 Cores (24C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+24
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	330*275*100
Outer box size(MM)	600*350*570
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	16.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD211-PLC-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD211-PLC-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD211-PLC-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

12 Core IP65 Fiber Optic Distribution Box -ZC-FD213 (7231277)

Model No.	ZC-FD213(7231277)
Color	Black, White..
Capacity	12 Cores (12C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+12
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	260*210*90
Outer box size(MM)	550*285*620
Net weight /1 PC (MAX)	1.02 kgs
Gross Weight/1 Carton	16 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD213-1 Type1: 1 pcs of 1x8 Mini PLC Splitter with 12 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD213-Blank



1x8 Mini PLC Splitter



SC Simplex Adaptor

8/12 Cores IP65 Fiber Optic Distribution Box -ZC-FD214 (7231278)

Model No.	ZC-FD214(7231278)
Color	Black, White..
Capacity	12 Cores (12C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+8
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	260*210*90
Outer box size(MM)	550*285*620
Net weight /1 PC (MAX)	0.99 kgs
Gross Weight/1 Carton	12 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD214-1 Type1: 1 pcs of 1x8 Mini PLC Splitter with 12 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD214-Blank



1x8 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD215-SC (7231279)

Model No.	ZC-FD215-SC(7231279)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	300*245*100
Outer box size(MM)	560*245*500
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD215-SC-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD215-SC-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD215-SC-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD216-PLC (7231280)

Model No.	ZC-FD216-PLC(7231280)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+16
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	300*245*100
Outer box size(MM)	560*330*500
Net weight /1 PC (MAX)	1.35 kgs
Gross Weight/1 Carton	15.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD216-PLC-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD216-PLC-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD216-PLC-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD218-A (7231283)

Model No.	ZC-FD218-A(7231283)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS
Dimension(L*W*D,MM)	295*185*110
Outer box size(MM)	620*320*400
Net weight /1 PC (MAX)	0.95 kgs
Gross Weight/1 Carton	11 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD218-A-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD218-A-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD218-A-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD218-B (7231284)

Model No.	ZC-FD218-B(7231284)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS
Dimension(L*W*D,MM)	295*185*110
Outer box size(MM)	620*320*400
Net weight /1 PC (MAX)	0.95 kgs
Gross Weight/1 Carton	11 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD218-B-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD218-B-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD218-B-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD218-C (7231285)

Model No.	ZC-FD218-C(7231285)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+16
Material	Strengthen ABS
Dimension(L*W*D,MM)	295*185*110
Outer box size(MM)	620*320*400
Net weight /1 PC (MAX)	0.95 kgs
Gross Weight/1 Carton	11 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD218-C-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD218-C-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD218-C-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

24 Cores IP65 Fiber Optic Distribution Box -ZC-FD220 (7231287)

Model No.	ZC-FD220(7231287)
Color	Black, White..
Capacity	24 Cores (24C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	4+24
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	340*220*105
Outer box size(MM)	465*370*590
Net weight /1 PC (MAX)	1.45 kgs
Gross Weight/1 Carton	16.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD220-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD220-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD220-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

48 Cores IP65 Fiber Optic Distribution Box -ZC-FD221-A-48 (7231288)

Model No.	ZC-FD221-A-48(7231288)
Color	Black, White..
Capacity	48 Cores (48C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+24
Material	Strengthen ABS
Dimension(L*W*D,MM)	270*350*120
Outer box size(MM)	630*365*540
Net weight /1 PC (MAX)	1.65 kgs
Gross Weight/1 Carton	17.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	

Loaded with Mini PLC
 ZC-FD221-A-48-1
 Type1: 2 pc of 1x16 Mini PLC Splitter
 with 48 pcs of SC Simplex Adaptor (Max.)

Empty (Without Mini PLC) ZC-FD221-A-48-Blank



1x16 Mini PLC Splitter



SC Simplex Adaptor

32 Cores IP65 Fiber Optic Distribution Box -ZC-FD221-A-32 (7231289)

Model No.	ZC-FD221-A-32(7231289)
Color	Black, White..
Capacity	48 Cores (48C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+24
Material	Strengthen ABS
Dimension(L*W*D,MM)	270*350*120
Outer box size(MM)	630*365*540
Net weight /1 PC (MAX)	1.65 kgs
Gross Weight/1 Carton	17.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	

Loaded with Mini PLC
 ZC-FD221-A-32-1
 Type1: 2 pc of 1x16 Mini PLC Splitter
 with 32 pcs of SC Simplex Adaptor (Max.)

Empty (Without Mini PLC) ZC-FD221-A-32-Blank



1x16 Mini PLC Splitter



SC Simplex Adaptor

24 Cores IP65 Fiber Optic Distribution Box -ZC-FD221-A-24 (7231290)

Model No.	ZC-FD221-A-24(7231290)
Color	Black, White..
Capacity	24 Cores (24C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+24
Material	Strengthen ABS
Dimension(L*W*D,MM)	270*350*120
Outer box size(MM)	630*365*540
Net weight /1 PC (MAX)	1.65 kgs
Gross Weight/1 Carton	17.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD220-A-24-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
	ZC-FD220-A-24-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 24 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD220-A-24-Blank



1x8 Mini PLC Splitter 1x16 Mini PLC Splitter SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD221-A-16 (7231291)

Model No.	ZC-FD221-A-16(7231291)
Color	Black, White..
Capacity	24 Cores (24C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+24
Material	Strengthen ABS
Dimension(L*W*D,MM)	270*350*120
Outer box size(MM)	630*365*540
Net weight /1 PC (MAX)	1.65 kgs
Gross Weight/1 Carton	17.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD221-A-16-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD221-A-16-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD221-A-16-Blank



1x8 Mini PLC Splitter 1x16 Mini PLC Splitter SC Simplex Adaptor

12 Cores IP65 Fiber Optic Distribution Box -ZC-FD222-SC (7231292)

Model No.	ZC-FD222-SC(7231292)
Color	Black, White..
Capacity	12 Cores (12C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+12
Material	Strengthen ABS
Dimension(L*W*D,MM)	235*215*70
Outer box size(MM)	550*285*620
Net weight /1 PC (MAX)	0.75 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	20 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD222-SC-1 Type1: 1 pc of 1x8 Mini PLC Splitter with 12 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD222-SC-Blank



1x8 Mini PLC Splitter



SC Simplex Adaptor

8 Core IP65 Fiber Optic Distribution Box -ZC-FD222-PLC (7231293)

Model No.	ZC-FD222-PLC(7231293)
Color	Black, White..
Capacity	12 Cores (12C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+12
Material	Strengthen ABS
Dimension(L*W*D,MM)	235*215*70
Outer box size(MM)	550*285*620
Net weight /1 PC (MAX)	0.75 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	20 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD222-PLC-1 Type1: 1 pcs of 1x8 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD222-PLC-Blank



1x8 Module PLC Splitter

8 Cores IP65 Fiber Optic Distribution Box -ZC-FD224 (7231296)

Model No.	ZC-FD224(7231296)
Color	Black, White..
Capacity	8 Cores (8C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+8
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	380*245*130
Outer box size(MM)	520*420*330
Net weight /1 PC (MAX)	3.85 kgs
Gross Weight/1 Carton	18 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
NOS OF PLC	/
NOS OF Adaptor	8 pcs HUAWEI SC Simplex(Max.)



16 Cores IP65 Fiber Optic Distribution Box -ZC-FD225-SC (7231297)

Model No.	ZC-FD218-A(7231283)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+16
Material	Strengthen PP
Dimension(L*W*D,MM)	290*185*108
Outer box size(MM)	415*305*540
Net weight /1 PC (MAX)	1.65 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	8 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD225-SC-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
	ZC-FD225-SC-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD225-SC-Blank



1x8 Mini PLC Splitter 1x16 Mini PLC Splitter SC Simplex Adaptor

16 Cores IP65 Fiber Optic Distribution Box -ZC-FD225-PLC (7231298)

Model No.	ZC-FD218-B(7231284)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	3+16
Material	Strengthen PP
Dimension(L*W*D,MM)	290*185*108
Outer box size(MM)	415*305*540
Net weight /1 PC (MAX)	1.65 kgs
Gross Weight/1 Carton	15 kgs
PCS/1 Carton	8 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD225-PLC-1 Type1: 2 pcs of 1x8 Module PLC Splitter
	ZC-FD225-PLC-2 Type2: 1 pc of 1x16 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD225-PLC-Blank



1x8 Module PLC Splitter



1x16 Module PLC Splitter

8 Cores IP65 Fiber Optic Distribution Box -ZC-FD226 (7231299)

Model No.	ZC-FD226 (7231299)
Color	Black, White..
Capacity	8 Cores (8C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	1+8
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	190*130*48
Outer box size(MM)	690*210*520
Net weight /1 PC (MAX)	0.275 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	50 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD226-1 Type1: 1 pc of 1x8 Mini PLC Splitter with 8 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD226-Blank



1x8 Mini PLC Splitter



SC Simplex Adaptor

8 Cores IP65 Fiber Optic Distribution Box -ZC-FD227 (7231300)

Model No.	ZC-FD227 (7231300)
Color	Black, White..
Capacity	8 Cores (8C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	1+8
Material	Strengthen ABS or ABS+PC
Dimension(L*W*D,MM)	240*125*50
Outer box size(MM)	690*210*520
Net weight /1 PC (MAX)	0.44 kgs
Gross Weight/1 Carton	10 kgs
PCS/1 Carton	20 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD227-1 Type1: 1 pc of 1x8 Mini PLC Splitter with 8 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD227-Blank



1x8 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP68 Fiber Optic Distribution Box -ZC-FD228 (7231301)

Model No.	ZC-FD228(7231301)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+16
Material	Strengthen PP
Dimension(L*W*D,MM)	285*215*115
Outer box size(MM)	475*290*650
Net weight /1 PC (MAX)	0.95 kgs
Gross Weight/1 Carton	10.5 kgs
PCS/1 Carton	10 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD228-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adapter (Max.)
	ZC-FD228-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adapter (Max.)
Empty (Without Mini PLC)	ZC-FD228-Blank



1x8 Mini PLC Splitter



1x16 Mini PLC Splitter



SC Simplex Adaptor

16 Cores IP68 Fiber Optic Distribution Box -ZC-FD229 (7231302)

Model No.	ZC-FD229(7231302)
Color	Black, White..
Capacity	16 Cores (16C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	2+16
Material	Strengthen ABS/ABS+PC
Dimension(L*W*D,MM)	343*303*98
Outer box size(MM)	605*375*470
Net weight /1 PC (MAX)	2.15 kgs
Gross Weight/1 Carton	18.5 kgs
PCS/1 Carton	8 pcs
Loaded Recommendations	
Loaded with Mini PLC	ZC-FD229-1 Type1: 2 pcs of 1x8 Mini PLC Splitter with 16 pcs of SC Simplex Adapter (Max.)
	ZC-FD229-2 Type2: 1 pc of 1x16 Mini PLC Splitter with 16 pcs of SC Simplex Adapter (Max.)
Empty (Without Mini PLC)	ZC-FD229-Blank



1x8 Mini PLC Splitter




1x16 Mini PLC Splitter



SC Simplex Adaptor

64 Cores Fiber Optic Distribution Box -ZC-FD230-64 (7231303)

Model No.	ZC-FD230-64(7231303)
Color	Black, White..
Capacity	48 Cores
Protection Level	IP65
Material	Strengthen ABS
Dimension(L*W*D,MM)	420×320×190
Outer box size(MM)	435*335*790
Net weight /1 PC (MAX)	3.55 kgs
Gross Weight/1 Carton	3.75 kgs
PCS/1 Carton	4 pcs
Loaded Recommendations	
Loaded with Module PLC	ZC-FD230-64-1 Type1: 2 pcs of 1x32 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD230-64-Blank

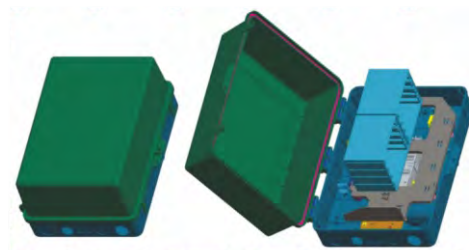

1x32 Module PLC Splitter

8 Cores Fiber Optic Distribution Box -ZC-FD231-PLC (7231304)

Model No.	ZC-FD231-PLC(7231304)
Color	Black, White..
Capacity	8 Cores
Protection Level	IP65
Material	Strengthen ABS
Dimension(L*W*D,MM)	205*220*50
Outer box size(MM)	48.5*23.5*48
Net weight /1 PC (MAX)	0.5 kgs
Gross Weight/1 Carton	10.5 kgs
PCS/1 Carton	20 pcs

Loaded Recommendations

Loaded with Module PLC	ZC-FD231-PLC-1 Type1: 1 pcs of 1x8 Module PLC Splitter
Empty (Without Mini PLC)	ZC-FD231-PLC-Blank



1x8 Module PLC Splitter

12 Cores Fiber Optic Distribution Box -ZC-FD231-SC (7231305)

Model No.	ZC-FD231-SC(7231305)
Color	Black, White..
Capacity	12 Cores
Protection Level	IP65
Material	Strengthen ABS
Dimension(L*W*D,MM)	205*220*50
Outer box size(MM)	48.5*23.5*48
Net weight /1 PC (MAX)	0.5 kgs
Gross Weight/1 Carton	10.5 kgs
PCS/1 Carton	20 pcs

Loaded Recommendations

Loaded with Mini PLC	ZC-FD231-SC-1 Type1: 1 pc of 1x8 Mini PLC Splitter with 12 pcs of SC Simplex Adaptor (Max.)
Empty (Without Mini PLC)	ZC-FD231-SC-Blank



1x8 Mini PLC Splitter



SC Simplex Adaptor

Fiber Socket & Desktop Box



2 Cores Fiber Socket & Desktop Box -ZC-F301-A (7239301-1)

Color	White
Capacity	2 Cores (2C × 1PC Splice Tray)
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	94*45*11
Outer box size(MM)	475*415*320
Net weight /1 PC(MAX.)	0.024 kgs
Gross Weight/1 Carton	25 kgs
PCS/1 Carton	1000 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x2 Mini PLC Splitter
NOS OF Adaptor	2 pcs of SC Simplex Adaptor (Max.)



1x2Mini PLC



SC Simplex Adaptor

4 Cores Fiber Socket & Desktop Box -ZC-F301-B(7239301-2)

Color	White
Capacity	4 Cores (4C × 1PC Splice Tray)
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	94*45*11
Outer box size(MM)	475*415*320
Net weight /1 PC(MAX.)	0.024 kgs
Gross Weight/1 Carton	25 kgs
PCS/1 Carton	1000 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x4 Mini PLC Splitter
NOS OF Adaptor	4 pcs of SC Simplex Adaptor (Max.)



1x4Mini PLC



SC Simplex Adaptor

2 Cores Fiber Socket & Desktop Box -ZC-F303(7239303)

Color	White
Adapter Type	SC/LC/FC
Capacity	2 Cores (2C × 1PC Splice Tray)
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	135*90*26
Outer box size(MM)	540*485*265
Net weight /1 PC(MAX.)	0.075 kgs
Gross Weight/1 Carton	16 kgs
PCS/1 Carton	200 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x2 Mini PLC Splitter
NOS OF Adaptor	2 pcs of SC Simplex Adaptor (Max.)



1x2Mini PLC



SC Simplex Adaptor

2 Cores Fiber Socket & Desktop Box -ZC-F304(7239304)

Color	White
Adapter Type	SC/LC/FC
Capacity	2 Cores (2C × 1PC Splice Tray)
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	100*84*25
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.0791 kgs
Gross Weight/1 Carton	16.5 kgs
PCS/1 Carton	200 pcs

Loaded Recommendations

NOS OF PLC	1 pc of 1x2 Mini PLC Splitter
NOS OF Adaptor	2 pcs of SC Simplex Adaptor (Max.)



1x2Mini PLC

SC Simplex Adaptor

1 Core Fiber Socket & Desktop Box -ZC-F305-1(7239305-1)

Color	White
Adapter Type	SC/LC/FC
Capacity	1 Core (1C × 1PC Splice Tray)
Inlet/outlet	1+1
Material	Strengthen ABS
Dimension(L*W*D,MM)	100*84*25
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.085 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	200 pcs

Loaded Recommendations

NOS OF PLC	/
NOS OF Adaptor	1 pc of SC Simplex Adaptor (Max.)



SC Simplex Adaptor

2 Cores Fiber Socket & Desktop Box -ZC-F305-2(7239305-2)

Color	White
Adapter Type	SC/LC/FC
Capacity	2 Cores (2C × 1PC Splice Tray)
Inlet/outlet	1+1
Material	Strengthen ABS
Dimension(L*W*D,MM)	100*84*25
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.085 kgs
Gross Weight/1 Carton	17 kgs
PCS/1 Carton	200 pcs

Loaded Recommendations

NOS OF PLC	/
NOS OF Adaptor	1 pc of SC Duplex Adaptor (Max.)



SC Duplex Adaptor

2 Cores Fiber Socket & Desktop Box -ZC-F306(7239306)

Color	White
Adapter Type	SC/LC/FC
Capacity	2 Cores (2C × 1PC Splice Tray)
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	100*84*25
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.0791 kgs
Gross Weight/1 Carton	16.5 kgs
PCS/1 Carton	200 pcs
Loaded Recommendations	
NOS OF PLC	/
NOS OF Adaptor	2 pcs of SC Simplex Adaptor (Max.)



SC Simplex Adaptor

4 Cores Fiber Socket & Desktop Box -ZC-F307(7239307)

Color	White
Adapter Type	SC/LC/FC
Capacity	4 Cores (4C × 1PC Splice Tray)
Inlet/outlet	4+4
Material	Strengthen ABS
Dimension(L*W*D,MM)	100*84*25
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.1 kgs
Gross Weight/1 Carton	21 kgs
PCS/1 Carton	200 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x4 Mini PLC Splitter
NOS OF Adaptor	4 pcs of SC Simplex Adaptor (Max.)



1x4Mini PLC



SC Simplex Adaptor

4 Cores Fiber Socket & Desktop Box -ZC-F308(7239308)

Color	White
Adapter Type	SC/LC/FC
Capacity	4 Cores (4C × 1PC Splice Tray)
Inlet/outlet	4+4
Material	Strengthen ABS
Dimension(L*W*D,MM)	100*84*25
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.0791 kgs
Gross Weight/1 Carton	16.5 kgs
PCS/1 Carton	200 pc
Loaded Recommendations	
NOS OF PLC	1 pc of 1x4 Mini PLC Splitter
NOS OF Adaptor	4 pcs of SC Simplex Adaptor (Max.)



1x4Mini PLC



SC Simplex Adaptor

4 Cores Fiber Socket & Desktop Box -ZC-F309(7239309)

Model No.	ZC-F309(7239309)
Color	White
Adapter Type	SC/LC/FC
Capacity	4 Cores (4C × 1PC Splice Tray)
Inlet/outlet	4+4
Material	Strengthen ABS
Dimension(L*W*D,MM)	150*120*30
Outer box size(MM)	820*325*490
Net weight /1 PC(MAX.)	0.1385 kgs
Gross Weight/1 Carton	28.5 kgs
PCS/1 Carton	200 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x4 Mini PLC Splitter
NOS OF Adaptor	4 pcs of SC Simplex Adaptor (Max.)



1x4Mini PLC



SC Simplex Adaptor

8 Cores Fiber Socket & Desktop Box -ZC-F310(7239310)

Color	White
Adapter Type	SC/LC/FC
Capacity	8 Cores (8C × 1PC Splice Tray)
Inlet/outlet	8+8
Material	Strengthen ABS
Dimension(L*W*D,MM)	205*120*30
Outer box size(MM)	650*225*590
Net weight /1 PC(MAX.)	0.204 kgs
Gross Weight/1 Carton	21 kgs
PCS/1 Carton	100 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x8 Mini PLC Splitter
NOS OF Adaptor	8 pcs of SC Simplex Adaptor (Max.)



1x8 Mini PLC



SC Simplex Adaptor

2 Cores Fiber Socket & Desktop Box -ZC-F311-2(7239311-2)

Color	White
Adapter Type	SC/LC/FC
Capacity	2 Cores (2C × 1PC Splice Tray)
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	205*140*40
Outer box size(MM)	700*210*520
Net weight /1 PC(MAX.)	0.304 kgs
Gross Weight/1 Carton	16 kgs
PCS/1 Carton	50 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x2 Mini PLC Splitter
NOS OF Adaptor	2 pcs of SC Simplex Adaptor (Max.)



1x2Mini PLC



SC Simplex Adaptor

4 Cores Fiber Socket & Desktop Box -ZC-F311-4(7239311-4)

Color	White
Adapter Type	SC/LC/FC
Capacity	4 Cores (4C × 1PC Splice Tray)
Inlet/outlet	4+4
Material	Strengthen ABS
Dimension(L*W*D,MM)	205*140*40
Outer box size(MM)	700*210*520
Net weight /1 PC(MAX.)	0.304 kgs
Gross Weight/1 Carton	16 kgs
PCS/1 Carton	50 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x4 Mini PLC Splitter
NOS OF Adaptor	4 pcs of SC Simplex Adaptor (Max.)



1x2Mini PLC



SC Simplex Adaptor

6 Cores Fiber Socket & Desktop Box -ZC-F311-6(7239311-6)

Color	White
Adapter Type	SC/LC/FC
Capacity	6 Cores (6C × 1PC Splice Tray)
Protection Level	IP65
Inlet/outlet	6+6
Material	Strengthen ABS
Dimension(L*W*D,MM)	205*140*40
Outer box size(MM)	700*210*520
Net weight /1 PC(MAX.)	0.304 kgs
Gross Weight/1 Carton	16 kgs
PCS/1 Carton	50 pcs
Loaded Recommendations	
NOS OF PLC	/
NOS OF Adaptor	6 pcs of SC Simplex Adaptor (Max.)



SC Simplex Adaptor

8 Cores Fiber Socket & Desktop Box -ZC-F312(7239312)

Color	White
Adapter Type	SC/LC/FC
Capacity	8 Cores (8C × 1PC Splice Tray)
Inlet/outlet	8+8
Material	Strengthen ABS
Dimension(L*W*D,MM)	199*160*46
Outer box size(MM)	520*280*235
Net weight /1 PC(MAX.)	0.304 kgs
Gross Weight/1 Carton	16 kgs
PCS/1 Carton	50 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x8 Mini PLC Splitter
NOS OF Adaptor	8 pcs of SC Simplex Adaptor (Max.)



1x8 Mini PLC



SC Simplex Adaptor

2 Cores Fiber Socket & Desktop Box -ZC-F313(7239313)

Color	White
Adapter Type	SC/LC/FC
Capacity	2 Cores (2C × 1PC Splice Tray)
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	95*90*8
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.0457 kgs
Gross Weight/1 Carton	9.5 kgs
PCS/1 Carton	200 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x2 Mini PLC Splitter
NOS OF Adaptor	2 pcs of SC Simplex Adaptor (Max.)



1x2Mini PLC



SC Simplex Adaptor

2 Cores Fiber Socket & Desktop Box -ZC-F314(7239314)

Color	White
Adapter Type	SC/LC/FC
Capacity	SC Simplex 2 Cores LC Duplex 4 Cores
Inlet/outlet	2+2
Material	Strengthen ABS
Dimension(L*W*D,MM)	86*86*8
Outer box size(MM)	480*240*470
Net weight /1 PC(MAX.)	0.0457 kgs
Gross Weight/1 Carton	9.5 kgs
PCS/1 Carton	200 pcs
Loaded Recommendations	
NOS OF PLC	1 pc of 1x2 Mini PLC Splitter
NOS OF Adaptor	2 pcs of SC Simplex Adaptor (Max.)



1x2Mini PLC




SC Simplex Adaptor

Fiber Optic Patch Panel




Fixed Rack mount Fiber patch panel

Empty Fixed Rack Mount Fiber Patch Panel

Zion Code	Description	
7244201 ZC1UF4P0	1U 19" 4 ports Empty Fixed Rack mount Fiber patch panel	
7244202 ZC1UF6P0	1U 19" 6 ports Empty Fixed Rack mount Fiber patch panel	
7244203 ZC1UF8P0	1U 19" 8 ports Empty Fixed Rack mount Fiber patch panel	
7244204 ZC1UF12P0	1U 19" 12 ports Empty Fixed Rack mount Fiber patch panel	
7244205 ZC1UF24P0	1U 19" 24 ports Empty Fixed Rack Fiber patch panel	
7244206 ZC1UF48P0	2U 19" 48 ports Empty Fixed Rack Fiber patch panel	





4 Ports Full Loaded Fixed Rack Mount Fiber Patch Panel

Zion Code	Description	
7244207 ZC1UF4P1222-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs SX SC/APC Adapters and 4pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244208 ZC1UF4P1212-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs SX SC/UPC Adapters and 4pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244209 ZC1UF4P1522-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs SX SC OM3 Adapters and 4pcs SX SC OM3 G657A1 LSZH Pigtails 1m	
7244210 ZC1UF4P1512-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs SX SC MM Adapters and 4pcs SX SC MM G657A1 LSZH Pigtails 1m	
7244211 ZC1UF4P2222-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs DX LC/APC Adapters and 8pcs SXL/APC G657A1 LSZH Pigtails 1m	
7244212 ZC1UF4P2212-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs DX LC/UPC Adapters and 8pcs SXL/UPC G657A1 LSZH Pigtails 1m	
7244213 ZC1UF4P2522-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs DX LC OM3 Adapters and 8pcs SXL OM3 LSZH Pigtails 1m	
7244214 ZC1UF4P2512-1	1U 19" 4 ports Full Loaded Fixed Rack mount Fiber patch panel with 4pcs DX LC MM Adapters and 8pcs SXL MM LSZH Pigtails 1m	

6 Ports Full Loaded Fixed Rack Mount Fiber Patch Panel

Zion Code	Description	
7244215 ZC1UF6P1222-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs SX SC/APC Adapters and 6pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244216 ZC1UF6P1212-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs SX SC/UPC Adapters and 6pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244217 ZC1UF6P1522-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs SX SC OM3 Adapters and 6pcs SX SC OM3 LSZH Pigtails 1m	
7244218 ZC1UF6P1512-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs SX SC MM Adapters and 6pcs SX SC MM LSZH Pigtails 1m	
7244219 ZC1UF6P2222-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs DX LC/APC Adapters and 12pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244220 ZC1UF6P2212-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs DX LC/UPC Adapters and 12pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244221 ZC1UF6P2522-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs DX LC OM3 Adapters and 12pcs SX LC OM3 LSZH Pigtails 1m	
7244222 ZC1UF6P2512-1	1U 19" 6 ports Full Loaded Fixed Rack mount Fiber patch panel with 6pcs DX LC MM Adapters and 12pcs SX LC MM LSZH Pigtails 1m	


8 Ports Full Loaded Fixed Rack Mount Fiber Patch Panel

Zion Code	Description	
7244223 ZC1UF8P1222-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs SX SC/APC Adapters and 8pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244224 ZC1UF8P1212-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs SX SC/UPC Adapters and 8pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244225 ZC1UF8P1522-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs SX SC OM3 Adapters and 8pcs SX SC OM3 LSZH Pigtails 1m	
7244226 ZC1UF8P1512-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs SX SC MM Adapters and 8pcs SX SC MM LSZH Pigtails 1m	
7244227 ZC1UF8P2222-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs DX LC/APC Adapters and 16pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244228 ZC1UF8P2212-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs DX LC/UPC Adapters and 16pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244229 ZC1UF8P2522-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs DX LC OM3 Adapters and 16pcs SX LC OM3 LSZH Pigtails 1m	
7244230 ZC1UF8P2512-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs DX LC MM Adapters and 16pcs SX LC MM LSZH Pigtails 1m	
7244231 ZC1UF8P3222-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs SX ST Adapters and 8pcs SX ST LSZH Pigtails 1m	
7244232 ZC1UF8P4212-1	1U 19" 8 ports Full Loaded Fixed Rack mount Fiber patch panel with 8pcs SX FC MM Adapters and 8pcs SX FC MM LSZH Pigtails 1m	

12 Ports Full Loaded Fixed Rack Mount Fiber Patch Panel

Zion Code	Description	
7244233 ZC1UF12P1222-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs SX SC/APC Adapters and 12pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244234 ZC1UF12P1212-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs SX SC/UPC Adapters and 12pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244235 ZC1UF12P1522-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs SX SC OM3 Adapters and 12pcs SX SC OM3 G657A1 LSZH Pigtails 1m	
7244236 ZC1UF12P1822-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs SX SC MM Adapters and 12pcs SX SC MM G657A1 LSZH Pigtails 1m	
7244237 ZC1UF12P2222-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs DX LC/APC Adapters and 24pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244238 ZC1UF12P2212-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs DX LC/UPC Adapters and 24pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244239 ZC1UF12P2522-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs DX LC OM3 Adapters and 24pcs SX LC OM3 LSZH Pigtails 1m	
7244240 ZC1UF12P2822-1	1U 19" 12 ports Full Loaded Fixed Rack mount Fiber patch panel with 12pcs DX LC MM Adapters and 24pcs SX LC MM LSZH Pigtails 1m	

24 Ports Full Loaded Fixed Rack Mount Fiber Patch Panel

Zion Code	Description	
7244241 ZC1UF24P1222-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs SX SC/APC Adapters and 24pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244242 ZC1UF24P1212-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs SX SC/UPC Adapters and 24pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244243 ZC1UF24P1522-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs SX SC OM3 Adapters and 24pcs SX SC OM3 LSZH Pigtails 1m	
7244244 ZC1UF24P1822-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs SX SC MM Adapters and 24pcs SX SC MM LSZH Pigtails 1m	
7244245 ZC1UF24P2222-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs DX LC/APC Adapters and 48pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244246 ZC1UF24P2212-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs DX LC/UPC Adapters and 48pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244247 ZC1UF24P2522-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs DX LC OM3 Adapters and 48pcs SX LC OM3 LSZH Pigtails 1m	
7244248 ZC1UF24P2822-1	1U 19" 24 ports Full Loaded Fixed Rack mount Fiber patch panel with 24pcs DX LC MM Adapters and 48pcs SX LC MM LSZH Pigtails 1m	

48 Ports Full Loaded Fixed Rack Mount Fiber Patch Panel

Zion Code	Description	
7244249 ZC2UF48P1222-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs SX SC/APC Adapters and 48pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244250 ZC2UF48P1212-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs SX SC/UPC Adapters and 48pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244251 ZC2UF48P1522-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs SX SC OM3 Adapters and 48pcs SX SC OM3 LSZH Pigtails 1m	
7244252 ZC2UF48P1822-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs SX SC MM Adapters and 48pcs SX SC MM LSZH Pigtails 1m	
7244253 ZC2UF48P2222-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs DX LC/APC Adapters and 96pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244254 ZC2UF48P2212-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs DX LC/UPC Adapters and 96pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244255 ZC2UF48P2522-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs DX LC OM3 Adapters and 96pcs SX LC OM3 LSZH Pigtails 1m	
7244256 ZC2UF48P2822-1	2U 19" 48 ports Full Loaded Fixed Rack mount Fiber patch panel with 48pcs DX LC MM Adapters and 96pcs SX LC MM LSZH Pigtails 1m	

Sliding Rack Mount Fiber Patch Panel

Empty Sliding Rail Rack Mount Fiber Patch Panel

Zion Code	Description	
7244301 ZC1US12P0	1U 19" 12 ports Empty Sliding Rail Rack mount Fiber patch panel	
7244302 ZC1US24P0	1U 19" 24 ports Empty Sliding Rail Rack Fiber patch panel	
7244303 ZC2US48P0	2U 19" 48 ports Empty Sliding Rail Rack Fiber patch panel	
7244304 ZC3US72P0	3U 19" 72 ports Empty Sliding Rail Rack Fiber patch panel	
7244305 ZC4US96P0	4U 19" 96 ports Empty Sliding Rail Rack Fiber patch panel	

12 Ports Full Loaded Sliding Rail Rack Mount Fiber Patch Panel

Zion Code	Description	
7244306 ZC1US12P1222-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs SX SC/APC Adapters and 12pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244307 ZC1US12P1212-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs SX SC/UPC Adapters and 12pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244308 ZC1US12P1522-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs SX SC OM3 Adapters and 12pcs SX SC OM3 LSZH Pigtails 1m	
7244309 ZC1US12P1822-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs SX SC MM Adapters and 12pcs SX SC MM LSZH Pigtails 1m	
7244310 ZC1US12P2222-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs DX LC/APC Adapters and 24pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244311 ZC1US12P2212-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs DX LC/UPC Adapters and 24pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244312 ZC1US12P2522-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs DX LC OM3 Adapters and 24pcs SX LC OM3 LSZH Pigtails 1m	
7244313 ZC1US12P2822-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs DX LC MM Adapters and 24pcs SX LC MM LSZH Pigtails 1m	

24 Ports Full Loaded Sliding Rail Rack Mount Fiber Patch Panel

Zion Code	Description	
7244314 ZC1US24P1222-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs SX SC/APC Adapters and 24pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244315 ZC1US24P1212-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs SX SC/UPC Adapters and 24pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244316 ZC1US24P1522-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs SX SC OM3 Adapters and 24pcs SX SC OM3 LSZH Pigtails 1m	
7244317 ZC2US24P1822-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs SX SC MM Adapters and 24pcs SX SC MM LSZH Pigtails 1m	
7244318 ZC1US24P2222-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs DX LC/APC Adapters and 48pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244319 ZC1US24P2212-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs DX LC/UPC Adapters and 48pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244320 ZC1US24P2522-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs DX LC OM3 Adapters and 48pcs SX LC OM3 LSZH Pigtails 1m	
7244321 ZC1US24P2822-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs DX LC MM Adapters and 48pcs SX LC MM LSZH Pigtails 1m	

48 Ports Full Loaded Sliding Rail Rack Mount Fiber Patch Panel

Zion Code	Description	
7244322 ZC2US48P1222-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs SX SC/APC Adapters and 48pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244323 ZC2US48P1212-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs SX SC/UPC Adapters and 48pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244324 ZC2US48P1522-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs SX SC OM3 Adapters and 48pcs SX SC OM3 LSZH Pigtails 1m	
7244325 ZC2US48P1822-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs SX SC MM Adapters and 48pcs SX SC MM LSZH Pigtails 1m	
7244326 ZC2US48P2222-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs DX LC/APC Adapters and 96pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244327 ZC2US48P2212-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs DX LC/UPC Adapters and 96pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244328 ZC2US48P2522-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs DX LC OM3 Adapters and 96pcs SX LC OM3 LSZH Pigtails 1m	
7244329 ZC2US48P2822-1	2U 19" 48 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 48pcs DX LC MM Adapters and 96pcs SX LC MM LSZH Pigtails 1m	

72 Ports Full Loaded Sliding Rail Rack Mount Fiber Patch Panel

Zion Code	Description	
7244330 ZC3US72P1222-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs SX SC/APC Adapters and 72pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244331 ZC3US72P1212-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs SX SC/UPC Adapters and 72pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244332 ZC3US72P1522-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs SX SC OM3 Adapters and 72pcs SX SC OM3 LSZH Pigtails 1m	
7244333 ZC3US72P1822-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs SX SC MM Adapters and 72pcs SX SC MM LSZH Pigtails 1m	
7244334 ZC3US72P2222-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs DX LC/APC Adapters and 144pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244335 ZC3US72P2212-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs DX LC/UPC Adapters and 144pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244336 ZC3US72P2522-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs DX LC OM3 Adapters and 144pcs SX LC OM3 LSZH Pigtails 1m	
7244337 ZC3US72P2822-1	3U 19" 72 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 72pcs DX LC MM Adapters and 144pcs SX LC MM LSZH Pigtails 1m	

96 Ports Full Loaded Sliding Rail Rack Mount Fiber Patch Panel

Zion Code	Description	
7244338 ZC4US96P1222-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs SX SC/APC Adapters and 96pcs SX SC/APC G657A1 LSZH Pigtails 1m	
7244339 ZC4US96P1212-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs SX SC/UPC Adapters and 96pcs SX SC/UPC G657A1 LSZH Pigtails 1m	
7244340 ZC4US96P1522-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs SX SC OM3 Adapters and 96pcs SX SC OM3 LSZH Pigtails 1m	
7244341 ZC4US96P1822-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs SX SC MM Adapters and 96pcs SX SC MM LSZH Pigtails 1m	
7244342 ZC4US96P2222-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs DX LC/APC Adapters and 192pcs SX LC/APC G657A1 LSZH Pigtails 1m	
7244343 ZC4US96P2212-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs DX LC/UPC Adapters and 192pcs SX LC/UPC G657A1 LSZH Pigtails 1m	
7244344 ZC4US96P2522-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs DX LC OM3 Adapters and 192pcs SX LC OM3 LSZH Pigtails 1m	
7244345 ZC4US96P2822-1	4U 19" 96 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 96pcs DX LC MM Adapters and 192pcs SX LC MM LSZH Pigtails 1m	
7244346 ZC1US12P3222-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs SX ST Adapters and 12pcs SX ST G657A1 LSZH Pigtails 1m	
7244347 ZC1US24P3222-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs SX ST Adapters and 24pcs SX ST G657A1 LSZH Pigtails 1m	
7244348 ZC1US12P4222-1	1U 19" 12 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 12pcs SX FC Adapters and 12pcs SX FC G657A1 LSZH Pigtails 1m	
7244349 ZC1US24P4222-1	1U 19" 24 ports Full Loaded Sliding Rail Rack mount Fiber patch panel with 24pcs SX FC Adapters and 24pcs SX FC G657A1 LSZH Pigtails 1m	
7244350 ZC1U24PXXXX	Customer-speciPc models 1U 19" 24 ports Wall-mounted optical cassette Patch panel	

Fiber Optic Adapter Panel

4.29" Fiber Adapter Panel

6 ports Type

Zion Code	Description	
7237001 ZC-6P6SCUSMDX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC/UPC SM Duplex Adapters	
7237002 ZC-6P6SCASMDX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC/APC SM Duplex Adapters	
7237003 ZC-6P6SCOM1DX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC OM1 Duplex Adapters	
7237004 ZC-6P6SCOM2DX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC OM2 Duplex Adapters	
7237005 ZC-6P6SCOM3DX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC OM3 Duplex Adapters	
7237006 ZC-6P6SCOM4DX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC OM4 Duplex Adapters	
7237007 ZC-6P6SCOM5DX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC OM5 Duplex Adapters	
7237008 ZC-6P6SCMMDX	6 ports Fiber Adapter Panel, Lording with 6 pcs SC MM Duplex Adapters	

6 ports Type

Zion Code	Description	
7237025 ZC-6P6STSMSX	6 ports Fiber Adapter Panel, Lording with 6 pcs ST SM Simplex Adapters	
7237026 ZC-6P6STMMSX	6 ports Fiber Adapter Panel, Lording with 6 pcs ST MM Simplex Adapters	

8 ports Type

Zion Code	Description	
7237027 ZC-8P8STSMSX	8 ports Fiber Adapter Panel, Lording with 8 pcs ST SM Simplex Adapters	
7237028 ZC-8P8STMMSX	8 ports Fiber Adapter Panel, Lording with 8 pcs ST MM Simplex Adapters	
7237029 ZC-8P8MTPMMSX	8 ports Fiber Adapter Panel, Lording with 8 pcs MTP Simplex MM Adapters	


12 ports Type

Zion Code	Description	
7237009 ZC-12P12LCUDX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC/UPC Duplex Adapters	
7237010 ZC-12P12LCADX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC/APC Duplex Adapters	

12 ports Type





Zion Code	Description	
7237011 ZC-12P12LCOM1DX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC OM1 Duplex Adapters	
7237012 ZC-12P12LCOM2DX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC OM2 Duplex Adapters	
7237013 ZC-12P12LCOM3DX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC OM3 Duplex Adapters	
7237014 ZC-12P12LCOM4DX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC OM4 Duplex Adapters	
7237015 ZC-12P12DLCOM5DX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC OM5 Duplex Adapters	
7237016 ZC-12P12LCMMDX	12 ports Fiber Adapter Panel, Lording with 12 pcs LC MM Duplex Adapters	
7237030 ZC-12P12MTPMMSX	12 ports Fiber Adapter Panel, Lording with 12 pcs MTP Simplex Adapters Key Up to Key Down Black Adapters	

18 ports Type


Zion Code	Description	
7237017 ZC-18P18LCUSMDX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC/UPC SM Duplex Adapters	
7237018 ZC-18P18LCASMDX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC/APC SM Duplex Adapters	
7237019 ZC-18P18LCOM1DX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC OM1 Duplex Adapters	
7237020 ZC-18P18LCOM2DX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC OM2 Duplex Adapters	
7237021 ZC-18P18LCOM3DX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC OM3 Duplex Adapters	
7237022 ZC-18P18LCOM4DX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC OM4 Duplex Adapters	
7237023 ZC-18P18LCOM5DX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC OM5 Duplex Adapters	
7237024 ZC-18P18LCMMDX	18 ports Fiber Adapter Panel, Lording with 18 pcs LC MM Duplex Adapters	

19" Fiber Adapter Panel

24 ports Type

Zion Code	Description	
7237050 ZC-24P24SCASMDX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC/APC SM Duplex Adapters	
7237051 ZC-24P24SCUSMDX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC/UPC SM Duplex Adapters	
7237052 ZC-24P24SCOM1DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC OM1 Duplex Adapters	
7237053 ZC-24P24SCOM2DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC OM2 Duplex Adapters	
7237054 ZC-24P24SCOM3DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC OM3 Duplex Adapters	
7237055 ZC-24P24SCOM4DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC OM4 Duplex Adapters	
7237056 ZC-24P24SCOM5DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC OM5 Duplex Adapters	
7237057 ZC-24P24SCMMDX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs SC MM Duplex Adapters	

24 ports Type

Zion Code	Description	
7237058 ZC-24P24LCUSMDX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC/UPC SM Duplex Adapters	
7237059 ZC-24P24LCASMDX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC/APC SM Duplex Adapters	
7237060 ZC-24P24LCOM1DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC OM1 Duplex Adapters	
7237061 ZC-24P24LCOM2DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC OM2 Duplex Adapters	
7237062 ZC-24P24LCOM3DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC OM3 Duplex Adapters	
7237063 ZC-24P24LCOM4DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC OM4 Duplex Adapters	
7237064 ZC-24P24LCOM5DX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC OM5 Duplex Adapters	
7237065 ZC-24P24LCMMDX	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC MM Duplex Adapters	
7237066 ZC-24P24LCUSMQUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC/UPC SM Quad Adapters	

24 ports Type

Zion Code	Description	
7237067 ZC-24P24LCASMQUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 24 pcs LC/APC SM Quad Adapters	
7237068 ZC-24P24LCOM1QUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 48 pcs LC OM1 Quad Adapters	
7237069 ZC-24P24LCOM2QUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 48 pcs LC OM2 Quad Adapters	
7237070 ZC-24P24LCOM3QUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 48 pcs LC OM3 Quad Adapters	
7237071 ZC-24P24LCOM4QUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 48 pcs LC OM4 Quad Adapters	
7237072 ZC-24P24LCOM5QUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 48 pcs LC OM5 Quad Adapters	
7237073 ZC-24P24LCMMQUAD	1U 19" 24 ports Fiber Adapter Panel, Lording with 48 pcs LC MM Quad Adapters	

Fiber Optic Patch Cords



Application

Fiber Optic Patch Cords are designed to interconnect or cross-connect fiber networks within structured cabling systems. Typical fiber connector interfaces are SC, ST, and LC in multimode or single-mode applications. They are mainly designed for data centers, enterprises, FTTx, LAN and WAN, CATV networks, telecom network applications, etc., requiring quick infrastructure deployment in areas such as main, horizontal, and zone distribution areas.

ZION COMMUNICATIONS' Fiber Optic Patch Cords meet all applicable standards. Compliant with TIA/EIA-568-C, ANSI/TIA/EIA-492, RoHS.

How to Choose Hber optic patch cord/Selecting the right Hber optic patch cord

Choosing the right fiber optic patch cord involves considering various factors to ensure optimal performance and compatibility with your network setup. Here's a step-by-step guide to help you make an informed decision:

1, Connector Type and Compatibility:

- Matching Connector Ports: If the devices you are connecting have identical connector ports, you should opt for connectors that match:

LC-LC / SC-SC / MPO-MPO



LC to LC



SC to SC



MPO to MPO

- Different Connector Ports: For devices with differing connector ports, you'll need connectors that can bridge the gap:

LC-SC / LC-ST / LC-FC



LC to SC



LC to ST



LC to FC

- Applications and Connector Selection: The specific applications you have in mind will influence your choice of connector:

- 1.25 mm LC: Suitable for XFP transceivers, SFP and SFP+ transceivers, and higher-density connections.
- 2.5 mm SC: Appropriate for EPON, GPON, GBIC, X2 and XENPAK transceivers, as well as telecom and datacom applications.
- 2.5 mm ST: Commonly used in military, campus, FTTH, datacom, and corporate network setups.
- 2.5 mm FC: Ideal for telecom, datacom, single-mode lasers, and measurement equipment applications.
- 2.5 x 6.4 mm MPO/MTP: Suited for 40G QSFP+ and 100G QSFP28 transceivers, as well as multi-fiber ribbon applications.

2, Fiber Mode (Single-mode or Multimode):

- Determine whether your network uses single-mode or multimode fibers. Single-mode fibers are suitable for long-distance communication, while multimode fibers are better for shorter distances.

How to Choose Hber optic patch cord/Selecting the right Hber optic patch cord

3, Simplex or Duplex Fiber strands?

- A simplex cable has one Pber connector at each end of the cable. One end is a transmitter, the other end is the receiver, and these are not reversible. This is commonly used for Bidirectional (BIDI) Pber optic transceivers. Simplex cables are less expensive and can transmit at higher speeds. Duplex strands allow two Pber connectors to be joined side by side with a dual-Pber connector. One strand transmits one way, and the other strand transmits back the opposite way. This is a huge advantage over simplex because it can transmit simultaneous bidirectional data.




4, Cable Length

- You'll need to know the distance between your devices and then select the cable length you need. Fiber optic patch cable most commonly ranges in lengths between 0.5m – 50m.

5, Connector Polish

- There are types of connector polish, PC, UPC, and APC. UPC and APC are the most popular. The APC polish performs better because the loss is lower than the UPC connector. So you may want an APC polish if your applications are sensitive to return loss and require high-precision signaling. But APC is more expensive than UPC.

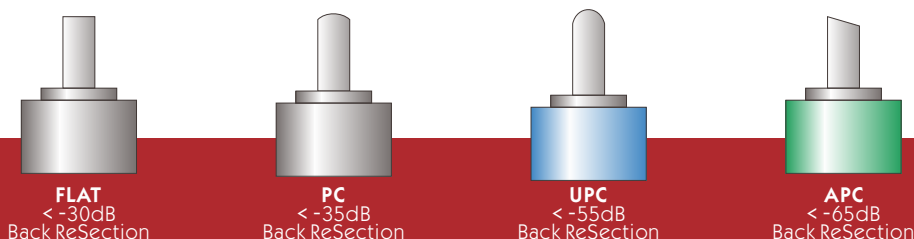

Cable Specification:

Fiber Optic Cable

Fiber Type	Single-mode: OS2 (G.652.D / G.657.A1 / G.657.A2)	
	Multi-mode: OM1(62.5/125), OM2(50/125), [(OM3, OM4) (50/125, Laser Optimization)]	
900um/0.9mm Buffer Colour	● Yellow: Single-mode: OS2 (G.652.D / G.657.A1 / G.657.A2)	
	● Orange: OM1, OM2	
	● Aqua: OM3, OM4	
	Customized : Green, Brown, White, Red, Black, Purple, Rose, Slate	
900um/0.9mm Types	Single Typical: 1 Fiber	
	Bunch Typical: 12 Fibers	
	Customized: 4-48 Fibers	
Aramid Yarn (2.0/3.0mm)	Aramid yarn is laid over the cable core to serve as peripheral strength member.	
Cable Jacket(2.0/3.0mm)	Main material: PVC / LSZH / Plenum (OFNP)	
	OD: 2.0/3.0mm	
Jacket Color	● Yellow: Single-mode: OS2 (G.652.D / G.657.A1 / G.657.A2)	
	● Orange: OM1, OM2	
	● Aqua: OM3, OM4	
Cable Length		1m, 2m, 3m. other lengths on request
Mechanical Specification	Ferrule	Ceramic; (MTRJ: PS-Polyphenylene Sulphide)
	Apex Offset	< 50um
	Fiber Height	± 100nm
	Radius of Curvature	7mm R < 25mm (Excluding MTRJ)
	Repeatability	≤ 0.2dB 1,000 times mating cycles

Connector Specification:

Connector

Connector Type	LC, SC, FC, ST, MU, MTRJ, LSH, E-2000
	LC (Lucent Connector/Little Connector/Local Connector) Typical Application: High density connections, SFP and SFP+ transceivers, XFP transceivers
	SC (Subscriber Connector/Square Connector/Standard Connector) Typical Application: Telecom, GPON, EPON, GBIC
	FC (Ferrule Connector) Typical Application: Datacom, telecom, measurement, equipment, single mode lasers
	ST (Straight Tip) Typical Application: Datacom

Parameter	FC, SC, LC			ST, MU, MTRJ	
	SM (OS2)		MM (OM1,2,3,4)	SM	MM
	UPC	APC	UPC/APC	UPC	UPC
Operating Wavelength(nm)	1310-1550		850-1300	1310-1550	850-1300
Insertion Loss (dB)	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.3
Return Loss (dB)	≥ 55	≥ 60	≥ 35	≥ 50	≥ 35
Repeatability (dB)	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
Interchangeability (dB)	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2
Tensile Strength (N)	≥ 1000	≥ 1000	≥ 1000	≥ 1000	≥ 1000
Operating Temperature (°C)	-20 ~ +85	-20 ~ +85	-20 ~ +85	-20 ~ +85	-20 ~ +85
Storage Temperature (°C)	-40 ~ +85	-40 ~ +85	-40 ~ +85	-40 ~ +85	-40 ~ +85

Naming Rules&Order Confirmation Information

Connector A	Polish Type	Connector B	Polish Type	Cable Type	Fiber Mode	Jacket Type	Jacket Dia.
1=LC	1=UPC	1=LC	1=UPC	S=Simplex	1=G652D	1=PVC	1=0.9mm
2=SC	2=APC	2=SC	2=APC	D=Duplex	2=G657A1	2=LSZH	2=2.0mm
3=FC		3=FC			3=G657A2	3=OFNP	3=3.0mm
4=ST		4=ST			4=OM1		
5=MU		5=MU			5=OM2		
6=MTRJ		6=MTRJ			6=OM3		
7=LSH		7=LSH			7=OM4		
8=E2000		8=E2000					

LC to LC types

Zion Code	Description	
1111D111-2 7242101	LC UPC to LC UPC Duplex G.652.D Single Mode PVC 0.9mm -2m(6ft) FOPC	
1111D112-2 7242102	LC UPC to LC UPC Duplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
1111D412-2 7242103	LC UPC to LC UPC Duplex OM1 Multimode PVC 2.0mm -2m(6ft) FOPC	
1111D512-2 7242104	LC UPC to LC UPC Duplex OM2 Multimode PVC 2.0mm -2m(6ft) FOPC	
1111D612-1 7242105	LC/UPC to LC/UPC Duplex OM3 Multimode PVC 2.0mm-1m(3ft) FOPC	
1111D712-1 7242106	LC/UPC to LC/UPC Duplex OM4 Multimode PVC 2.0mm-1m(3ft) FOPC	
1111S111-2 7242107	LC UPC to LC UPC Simplex G.652.D Single Mode PVC 0.9mm -2m(6ft) FOPC	
1111S112-2 7242108	LC UPC to LC UPC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
1111S412-2 7242109	LC UPC to LC UPC Simplex OM1 Multimode PVC 2.0mm -2m(6ft) FOPC	
1112S112-2 7242110	LC UPC to LC APC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
1212D112-2 7242111	LC APC to LC APC Duplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
1212S112-2 7242112	LC APC to LC APC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
.....		

SC to SC types

Zion Code	Description	
9121D112-2 7242113	SC UPC to SC UPC Duplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
9121D412-2 7242114	SC UPC to SC UPC Duplex OM1 Multimode PVC 2.0mm -2m(6ft) FOPC	
9121S112-2 7242115	SC UPC to SC UPC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
9121S412-2 7242116	SC UPC to SC UPC Simplex OM1 Multimode PVC 2.0mm -2m(6ft) FOPC	
9222D112-2 7242117	SC APC to SC APC Duplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
9222S112-2 7242118	SC APC to SC APC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	

LC to SC types

Zion Code	Description	
1121D112-2 724119	LC UPC to SC UPC Duplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
1121D412-2 724120	LC UPC to SC UPC Duplex OM1 Multimode PVC 2.0mm -2m(6ft) FOPC	
1222S112-2 724121	LC UPC to SC UPC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC	
1121S412-2 724122	LC UPC to SC UPC Simplex OM1 Multimode PVC 2.0mm -2m(6ft) FOPC	

LC to SC types

Zion Code	Description
1222D112-2 724123	LC APC to SC APC Duplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC
1121S112-2 724124	LC UPC to SC UPC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC
1222S112-2 724125	LC APC to SC APC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC



LC to ST types

Zion Code	Description
1141D112-2 724126	LC UPC to ST UPC Duplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC
1141D212-2 724127	LC APC to ST UPC Duplex OM3 Multimode PVC 2.0mm -2m(6ft) FOPC
1141D412-2 724128	LC UPC to ST UPC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC



LC to FC types

Zion Code	Description
1131S212-2 724129	LC UPC to FC UPC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC



FC to FC types

Zion Code	Description
3131S112-2 7242130	FC UPC to FC UPC Simplex G.652.D Single Mode PVC 2.0mm -2m(6ft) FOPC



Fiber Optic Pigtails



Application

Fiber optic pigtail is a tight buffered fiber cable with connectors pre-terminated on one end and exposed fiber on the other. The exposed end could be stripped and fusion spliced to a single or multi-fiber trunk. Bunch and color-coded types are available. And these pigtails feature a typical 900um tight buffered as default. But we can also design and produce OD of 2.0 and 3.0mm types. They are easy for fusing and protecting the tight buffers from damage. Mainly designed for data center, FTTH/FTTX, LAN and WAN, CATV network, telecom network applications etc.

ZION COMMUNICATIONS' Fiber Optic Patch Cords meets all applicable standards.

Compliant with TIA/EIA-568-C, ANSI/TIA/EIA-492, RoHS.



Singlemode 0.9mm Buffer Pigtail



Multimode(62.5/125um) 0.9mm Buffer Pigtail



Singlemode 3.00mm Jacket Pigtail



Multimode 3.00mm Jacket Pigtail



OM3 Pigtail



Singlemode 0.9mm Buffer Pigtail



Multimode(62.5/125um) 0.9mm Buffer Pigtail

Naming Rules & Order Confirmation Information

Connector A	Polish Type	Fiber Number	Fiber Mode	Jacket Type	Jacket Dia.	Length
1=LC	1=UPC	F1=1	1=G652D	1=PVC	1=0.9mm	05=0.5m
2=SC	2=APC	F12=12	2=G657A1	2=LSZH	2=2.0mm	1=1m
3=FC		F4-48=4-48	3=G657A2	3=OFNP	3=3.0mm	2=2m
4=ST			4=OM1			3=3m
5=MU			5=OM2			
6=MTRJ			6=OM3			
7=LSH			7=OM4			
8=E2000						

Fiber Optic Pigtail: Bunch Typical 12 Fibers (U=Unjacketed)

Zion Code	Description	
11F12111-2 7242201	LC UPC 12 Fibers G.652.D Single Mode Bunch PVC 0.9mm with Jacket FOPT	
11F12111U-2 7242202	LC UPC 12 Fibers G.652.D Single Mode Unjacketed Color-Coded FOPT	
11F12411-2 7242203	LC UPC 12 Fibers OM1 Multimode Bunch PVC 0.9mm with Jacket FOPT	
21F12111-2 7242204	SC UPC 12 Fibers G.652.D Single Mode Bunch PVC 0.9mm with Jacket FOPT	
21F12111U-2 7242205	SC UPC 12 Fibers G.652.D Single Mode Unjacketed Color-Coded FOPT	
21F12411-2 7242206	SC UPC 12 Fibers OM1 Multimode Bunch PVC 0.9mm with Jacket FOPT	

Fiber Optic Pigtail: Single Typical 1 Fiber

11F1111-2
7242207 LC UPC Simplex G.652.D Single Mode PVC 0.9mm -2m(6ft) FOPT



11F1411-2
7242208 LC UPC Simplex OM1 Multimode PVC 0.9mm -2m(6ft) FOPT



12F1111-2
7242209 LC APC Simplex G.652.D Single Mode PVC 0.9mm -2m(6ft) FOPT



12F1411-2
7242210 LC APC Simplex OM1 Multimode PVC 0.9mm -2m(6ft) FOPT



Fiber Optic Pigtail: Single Typical 1 Fiber

Zion Code Description

21F1111-2
7242211 SC UPC Simplex G.652.D Single Mode PVC 0.9mm -2m(6ft) FOPT



21F1411-2
7242212 SC UPC Simplex OM1 Multimode PVC 0.9mm -2m(6ft) FOPT



22F1111-2
7242213 SC APC Simplex G.652.D Single Mode PVC 0.9mm -2m(6ft) FOPT



22F1411-2
7242214 SC APC Simplex OM1 Multimode PVC 0.9mm -2m(6ft) FOPT



41F1411-2
7242215 ST UPC Simplex OM1 Multimode PVC 0.9mm -2m(6ft) FOPT



42F1111-2
7242216 ST APC Simplex G.652.D Single Mode PVC 0.9mm -2m(6ft) FOPT



MPO/MTP



MPO/MTP Patch cord

Description

The MPO/MTP connector is a type of Pber connector. MPO (Multi-Fiber Push On) is a multi-core Pber connector type. The MPO/MTP high-density Pber pre-connection system is currently mainly used in high-density environments of data centers, the application of optical Pber to the building, and the internal connection applications inside the optical transceiver equipment such as the optical device, 40G, 100G, and QSFP+.

MPO/MTP connector types are distinguished according to the IEC 61754-7(EIA/TIA-604-5) regulations: core numbers (array number), male head (Male or female), and polarity (PC or APC).

MPO/MTP 3.0mm LSZH Fiber Patch Cord. MPO/MTP Fiber Patch Cord is terminated with MPO/MTP connector on both ends. MPO Fiber Patch Cord connects MPO/MTP modules as a permanent link. The MPO/MTP Fiber Patch Cord has 12, 24, 48, 60, 72, 96, and 144 Pbers.

Support speeds up to 10/40/100Gbps data center solutions. They are typically adopted to interconnect cassettes, panels, or ruggedized MPO/MTP fan-outs and to rapidly deploy high-density backbone cabling in data centers and other high-Pber environments. Besides, MPO/MTP provides much Sexibility and convenience once you change the connector style in the patch panels. Instead of changing the connector on the cable trunk, just install a new cassette with the new connector style on the cross-connect side of the patch panel.

MPO/MTP Fiber Patch Cord is designed for 40G QSFP+ SR4, 40G QSFP+ CSR4, and 100G QSFP28 SR4 optics direct connections and high-density data centers.

Optical SpeciHcations

Spec items.	Single mode (APC 8-degree polished)	Multimode (PC Flat polish)
nsertion loss (MPO/MTP) (IEC 61300-3-34)	Standard loss:≤0.75dB(max), ≤0.50(Typical) Super Low loss:≤0.35dB(max) , ≤0.20dB(Typical)	Standard loss:≤0.6dB(max), ≤0.50(Typical) Super Low loss:≤0.35dB(max) , ≤0.20dB(Typical)
Insertion loss (LC/SC/FC/ST) (IEC 61300-3-6)	≤0.3dB	≤0.3dB
Return loss (MPO/MTP)	≥60dB(8degree polishing)	≥25dB
Return loss (LC/SC/FC/ST)	APC≥60dB; UPC≥50dB	≥35dB
Durability	<0.3dB typical change, 200 matings	
Interchangeability	≤0.2dB	
Plug-in times	MPO≤ 500; MTP>600	
Tensile strength	>70N	
Operating Temperature (°C)	-40 to + 85°C	

Connectors' Industrial Standard


Connector	Reference	Housing Details
MPO/MTP Singlemode	IEC 61754-7 EIA/TIA-604-5	SM APC: Green connectors+black boot (Standard Loss MPO/MTP) SM APC: Yellow connectors+black boot (Super low loss MPO/MTP)
MPO/MTP Multimode	IEC 61754-7 EIA/TIA-604-5	OM1&OM2 PC: Beige connectors+black boot (Standard Loss MPO/MTP) OM3&OM4 PC: Aqua connectors+black boot (Standard&Super low loss MPO/MTP) OM3&OM4 PC: Heather Violet connectors+black boot (Standard loss MPO/MTP)

Push Pull Tab For Senko MPO/MTP

MPO

High Density Push Pull tab


HD Tab allows MPO Plus use in High Density rack applications

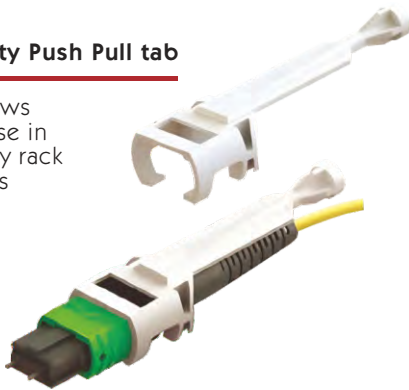

MTP

High Density Push Pull tab

HD Tab allows MTP Plus use in High Density rack applications

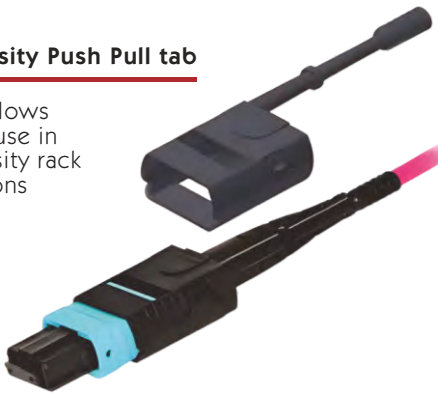

Fiber Channel



8 Fibers



12 Fibers



24 Fibers

Naming Rules & Order Confirmation Informationures

COMPANY NAME	PEODUCTS TYPE	CONNECT PIN TYPE	FIBER CORES	FIBER TYPE	JACKET TYPE	JACKET COLOR	POLARITY	LOSS TANDARD	LEGNTH
ZC- ZION COMMUNICATION	M1- Senko MPO without tab	1- Female to Female	1- 8F round cable	1- G652D	H- LSZH	A- Blue	A- Polarity A	1- Normal Standardloss	1- 1m
	M2- US Conec MTP Male without tab	2- Female to Male	2- 12F round cable	2- G657A1	C- PVC	B- Orange	B- Polarity B	2- Super lowloss	1.5- 1.5m
	M3- China brand MPO	3- Male to Male	3- 16F round cable	3- G657A2/B2	R- OFNR	C- Green	C- Polarity C		2- 2m
	M4- Senko MPO with pull/Push tab		4- 20F round cable	4- G657B3	P- OFNP	D- Brown			
	M5- US Conec MTP with pull/Push tab		5- 24F round cable	5- OM1	U- PU	E- Grey			
			6- 8F ribbon cable	6- OM2	...	F- Whitie			
			7- 12F ribbon cable	7- OM3		G- Red			
			8- 8F ribbon bare Pber	8- OM4		H- Black			
			9- 12F ribbon bare Pber	9- OM5		I- Yellow			
						J- Purple			
						K- Pink			
						L- Aqua			
						M- Magenta			

MPO/MTP SM

Zion Code	Description
ZCM1122HIA1X (7236001)	MPO Female To MPO Female SM 3.0mm LSZH 12 Fibers MPO Patch Cord Custom Meters
ZCM1152HIA1X (7236002)	MPO Female To MPO Female SM 3.0mm LSZH 24 Fibers MPO Patch Cord Custom Meters
ZCM2122HIA1X (7236007)	MTP Female To MTP Female SM 3.0mm LSZH 12 Fibers MTP Patch Cord Custom Meters
ZCM2152HIA1X (7236008)	MTP Female To MTP Female SM 3.0mm LSZH 24 Fibers MTP Patch Cord Custom Meters

* Note: X= Length(1=1m, 1.5=1.5m...)



MPO/MTP OM3

Zion Code	Description
ZCM2122HIA1X (7236003)	MPO Female To MPO Female OM3 3.0mm LSZH 12 Fibers MPO Patch Cord Custom Meters
ZCM2152HIA1X (7236004)	MPO Female To MPO Female OM3 3.0mm LSZH 24 Fibers MPO Patch Cord Custom Meters
ZCM2127HLA1X (7236009)	MTP Female To MTP Female OM3 3.0mm LSZH 12 Fibers MTP Patch Cord Custom Meters
ZCM2157HLA1X (7236010)	MTP Female To MTP Female OM3 3.0mm LSZH 24 Fibers MTP Patch Cord Custom Meters

* Note: X= Length(1=1m, 1.5=1.5m...)



MPO/MTP OM4

Zion Code	Description
ZCM1128HMA1X (7236005)	MPO Female To MPO Female OM4 3.0mm LSZH 12 Fibers MPO Patch Cord Custom Meters
ZCM1158HMA1X (7236006)	MPO Female To MPO Female OM4 3.0mm LSZH 24 Fibers MPO Patch Cord Custom Meters
ZCM2128HMA1X (7236011)	MTP Female To MTP Female OM4 3.0mm LSZH 12 Fibers MTP Patch Cord Custom Meters
ZCM2158HMA1X (7236012)	MTP Female To MTP Female OM4 3.0mm LSZH 24 Fibers MTP Trunk Cable Custom Meters

* Note: X= Length(1=1m, 1.5=1.5m...)



MPO/MTP Fiber Optic Loopback

Description

Regarding practical application, the Pber optic loopback test is often employed to check Pber optic transceivers. Since the transceiver has two ports for receiving and transmitting the light signal, it is necessary to test the ports to see whether they are still operating. Thus, a Pber optic loopback test is the most convenient transceiver maintenance method. The testing process is done by routing the laser signal from the transmitter port back to the receiver port. Then, the transmitted pattern is compared with the received pattern to ensure they are identical and have no errors.

- Collocated with 40G or 100G MPO/MPO (MTP/MTP) interface transceivers
- The Loopback Module can be used to test the transmission capability and receiver sensitivity of fiber optic network equipment.

Material's details:

Typically, a loopback test is a test in which a signal is sent from a communication device and looped back to the device as a way to determine whether it is functioning well or as a way to troubleshoot a defective node in the network. As for fiber optic loopback testing, optical loopbacks are used to verify the operational reliability of the device. Using a fiber optic loopback cable or fiber optic loopback module for data transmission, the signal emitted by the device is looped from the transmit (Tx) end of an active component back to the receive (Rx) end of the same element.

Naming Rules & Order ConHrmation Informationures

COMPANY NAME	PEODUCTS TYPE	CONNECT PIN TYPE	FIBER CORES	FIBER TYPE	JACKET TYPE	STRUCTURE	POLARITY	LOSS TANDARD
ZC-ZION COMMUNICATION	M1-MPO	1-Female	1-8F round cable	1-G657A1	H-LSZH	1-Cable	A-Polarity 1	1-Normal Standardloss
	M2-MTP	2-Male	2-12F round cable	2-G657A2/B2	C-PVC	2-Module	B-Polarity 2	2-Super lowloss
			3-16F round cable	3-G657B3	R-OFNR			
			4-24F round cable	4-OM1	P-OFNP			
			5-32F round cable	5-OM2	U-PU			
				6-OM3	...			
				7-OM4				
				8-OM5				



MPO Fiber Optic Loopback Cable/Module (Hot selling types)

Zion Code	Description		
ZCM1111HXA1 7236013	MPO Female 8F G657A1 LSZH X Polarity1 Normal Standardloss		
ZCM1121HXA1 7236014	MPO Female 12F G657A1 LSZH X Polarity1 Normal Standardloss		
ZCM1141HXA1 7236015	MPO Female 24F G657A1 LSZH X Polarity1 Normal Standardloss		
ZCM1116HXA1 7236016	MPO Female 8F OM3 LSZH X Polarity1 Normal Standardloss		
ZCM1126HXA1 7236017	MPO Female 12F OM3 LSZH X Polarity1 Normal Standardloss		
ZCM1146HXA1 7236018	MPO Female 24F OM3 LSZH X Polarity1 Normal Standardloss		
ZCM1117HXA1 7236019	MPO Female 8F OM4 LSZH X Polarity1 Normal Standardloss		
ZCM1127HXA1 7236020	MPO Female 12F OM4 LSZH X Polarity1 Normal Standardloss		
ZCM1147HXA1 7236021	MPO Female 24F OM4 LSZH X Polarity1 Normal Standardloss		

*Note: X= Structure (1-Cable, 2-Module)

MTP Fiber Optic Loopback Cable/Module (Hot selling types)

Zion Code	Description		
ZCM2111HXA1 7236022	MTP Female 8F G657A1 LSZH X Polarity1 Normal Standardloss		
ZCM2121HXA1 7236023	MTP Female 12F G657A1 LSZH X Polarity1 Normal Standardloss		
ZCM2141HXA1 7236024	MTP Female 24F G657A1 LSZH X Polarity1 Normal Standardloss		
ZCM2116HXA1 7236025	MTP Female 8F OM3 LSZH X Polarity1 Normal Standardloss		
ZCM2126HXA1 7236026	MTP Female 12F OM3 LSZH X Polarity1 Normal Standardloss		
ZCM2146HXA1 7236027	MTP Female 24F OM3 LSZH X Polarity1 Normal Standardloss		
ZCM2117HXA1 7236028	MTP Female 8F OM4 LSZH X Polarity1 Normal Standardloss		
ZCM2127HXA1 7236029	MTP Female 12F OM4 LSZH X Polarity1 Normal Standardloss		
ZCM2147HXA1 7236030	MTP Female 24F OM4 LSZH X Polarity1 Normal Standardloss		

*Note: X= Structure (1-Cable, 2-Module)

MPO/MTP (Male) -LC Fan-out/Breakout Cable 0.9mm

Description

MPO(MTP) Connectors are from Senko/Nissin/Sumitomo.

MPO(MTP)- LC/SC/FC/ST Fanout 0.9mm cable is a kind of high density cable assemblies which is generally use in three areas.

- The Data Center application with high dense degree environment.
- The optical fiber to the building.
- The internal connector application in fiber equipment.

Naming Rules & Order Confirmation Informationures

COMPANY NAME	PRODUCTS TYPE	CONNECT A PIN TYPE	CONNECT B PIN TYPE	FIBER CORES	FIBER TYPE	LEGNTH
ZC- ZION COMMUNICATION	M1- Senko MPO without tab	1- SM Standard Female	1- LC UPC standard	1- 8F round cable	1- G652D	1- 30cm
	M2- US Conec MTP Male without tab	2- SM Standard male	2- LC APC standard	2- 12F round cable	2- G657A1	
	M3- China brand MPO	3- SM super low loss Female	3- SC UPC Standard connector	3- 16F round cable	3- G657A2/B2	
	M4- Senko MPO with pull/Push tab	4- SM super low loss male	4- FC UPC Standard connector	4- 20F round cable	4- G657B3	
	M5- US Conec MTP with pull/Push tab	5- MM Standard Female	5- ST UPC Standard connector	5- 24F round cable	5- OM1	
		6- MM Standard male	6- SC APC Standard connector	6- 8F ribbon cable	6- OM2	
		7- MM super low loss Female	7- FC APC Standard connector		7- OM3	
		8- MM super low loss male	8- E2000 UPC Standard connector		8- OM4	
			9- E2000 APC Standard connector		9- OM5	

MPO/MTP-LC Fan-out 0.9mm (ZION'S hot selling types)

Zion Code	Description	
ZCM16117X 7236031	Senko MPO without tab/ MM Standard Male / LC UPC Standard /8F /OM3 / X(Length)	
ZCM26117X 7236034	US conec MTP Male without tab / MM Standard Male / LC UPC Standard / 8F / OM3 / X(Length)	
ZCM16127X 7236032	Senko MPO without tab/ MM Standard Male / LC UPC Standard /12F /OM3 / X(Length)	
ZCM26127X 7236035	US conec MTP Male without tab / MM Standard Male / LC UPC Standard / 12F / OM3 / X(Length)	
ZCM16157X 7236033	Senko MPO without tab/ MM Standard Male / LC UPC Standard /24F /OM3 / X(Length)	
ZCM26157X 7236036	US conec MTP Male without tab / MM Standard Male / LC UPC Standard / 24F / OM3 / X(Length)	

MPO/MTP-LC Straight harness Cables 2.0mm

Description

SM 8F MPO(MTP) LC/SC/FC/ST Straight harness Cables are optimized for 40G QSFP+PLR4 to 10G SFP+LR optics direct connection and high-density data center applications.

This 8-fiber harness cable is used for a direct connection between QSFP+ and (4)SFP+ ports with no patch panels or intermediate trunks in between.

MPO(MTP) connectors are from Senko, Nissin, and Sumitomo. MPO(MTP)Fiber Patch Cord is a high-density cable assembly generally used in three areas.

- The Data Center application with high dense degree environment.
- The optical fiber to the building.
- The internal connector application in fiber equipment.

Naming Rules & Order Confirmation Informationures

COMPANY NAME	PRODUCTS TYPE	CONNECT A PIN TYPE	CONNECT B PIN TYPE	FIBER CORES	FIBER TYPE	JACKET TYPE	JACKET COLOR	POLARITY	LEGNTH
ZC-ZION COMMUNICATION	M1- Senko MPO without tab	1-Standard loss Female	A-LC UPC Straight	1- 8F round cable	1- G652D	H- LSZH	A- Blue	A- Polarity A	1- 1m
	M2- US Conec MTP Male without tab	2-Standard loss male	B-LC APC Straight	2- 12F round cable	2- G657A1	C- PVC	B- Orange	B- Polarity B	1.5- 1.5m
	M3- China brand MPO	3-Super Low loss Female	C-LC UPC Uniboot	3- 16F round cable	3- G657A2/B2	R- OFNR	C- Green	C- Polarity C	2- 2m
	M4- Senko MPO with pull/Push tab	4-Super low loss male	D-LC UPC Uniboot with Push-Pull Tab	4- 20F round cable	4- G657B3	P- OFNP	D- Brown		
	M5- US Conec MTP with pull/Push tab		E- LC UPC Uniboot with flat Clip	5- 24F round cable	5- OM1	U- PU	E- Grey		
			F-LC APC Uniboot	6- 8F ribbon cable	6- OM2	...	F- White		
			G-LC APC Uniboot with Push-Pull Tab	7- 12F ribbon cable	7- OM3		G- Red		
			H-LC APC Uniboot with flat Clip	8- 8F ribbon bare fiber	8- OM4		H- Black		
			I-SC UPC Connector	9- 12F ribbon bare fiber	9- OM5		I- Yellow		
			G-SC APC Connecto				J- Purple		

MPO/MTP-LC Straight harness/Breakout Cable 2.0mm (SM/OM3)

Zion Code	Description	
ZCM11A12HIAx 7236037	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 8F round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM21A12HIAx 7236046	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 8F round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM11A22HIAx 7236038	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 12F round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM21A22HIAx 7236047	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 12F round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM11A52HIAx 7236039	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 24F round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM21A52HIAx 7236048	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 24F round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM11A17HLAx 7236040	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 8F round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	
ZCM21A17HLAx 7236049	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 8F round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	
ZCM11A27HLAx 7236041	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 12F round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	
ZCM21A27HLAx 7236050	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 12F round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	
ZCM11A57HLAx 7236042	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 24F round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	
ZCM21A57HLAx 7236051	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 24F round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	

MPO/MTP-LC Straight harness/Breakout Cable 2.0mm (OM4)

Zion Code	Description	
ZCM11A18HMAX 7236043	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 8F round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	
ZCM21A18HMAX 7236052	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 8F round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	
ZCM11A28HMAX 7236044	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 12F round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	
ZCM21A28HMAX 7236053	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 12F round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	
ZCM11A58HMAX 7236045	Senko MPO without tab / Standard Loss Femal / LC UPC Straight 24F round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	
ZCM21A58HMAX 7236054	US Conec MTP Male without tab / Standard Loss Femal / LC UPC Straight 24F round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	

MPO/MTP Fiber Optic Trunk Cable

Description

MPO(MTP) connectors are from Senko, Nissin, and Sumitomo. MPO(MTP) Fiber Patch Cord is a kind of high density cable assemblies generally used in three areas.

- The Data Center application with high dense degree environment.
- The optical fiber to the building.
- The internal connector application in fiber equipment.

Naming Rules & Order Confirmation Information

COMPANY NAME	PRODUCTS TYPE	CONNECT PIN TYPE	FIBER & CABLE	FIBER TYPE	JACKET TYPE	JACKET COLOR	POLARITY	LENGTH
ZC-ZION COMMUNICATION	M1- Senko MPO without tab	1- Female to Female	A- 2x12F round cable	1- G652D	H- LSZH	A- Blue	A- Polarity A	1- 1m
	M2- US Conec MTP Male without tab	2- Female to Male	B- 2x12F Flat cable	2- G657A1	C- PVC	B- Orange	B- Polarity B	1.5- 1.5m
	M3- China brand MPO	3- Male to Male	C- 4x12F round cable	3- G657A2/B2	R- OFNR	C- Green	C- Polarity C	2- 2m
	M4- Senko MPO with pull/Push tab		D- 5x12F round cable	4- G657B3	P- OFNP	D- Brown		
	M5- US Conec MTP with pull/Push tab		E- 6x12F round cable	5- OM1	U- PU	E- Grey		
			F- 8x12F round cable	6- OM2	...	F- White		
			G- 12x12F round cable	7- OM3		G- Red		
			H- 2x24F round cable	8- OM4		H- Black		
			I- 2x24F Flat cable	9- OM5		I- Yellow		
			J- 3x24F round cable			J- Purple		
			K- 4x24F round cable			K- Pink		
			L- 5x24F round cable			L- Aqua		
			M- 6x24F round cable			M- Magenta		
			N- 8x24F round					
			O- 12x24F					

MPO/MTP Fiber Optic Trunk Cable

Zion Code	Description	
ZCM12C2H1AX 7236055	Senko MPO without tab / Female to Male 4x12 round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM22C2H1AX 7236058	US Conec MTP Male without tab / Female to Male 4x12 round cable / G657.A1 / LSZH / Yellow / Polarity A / X(Length)	
ZCM12C7HAAX 7236056	Senko MPO without tab / Female to Male 4x12 round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	
ZCM22C7HAAX 7236059	US Conec MTP Male without tab / Female to Male 4x12 round cable / OM3 / LSZH / Aqua / Polarity A / X(Length)	
ZCM12C8HMAX 7236057	Senko MPO without tab / Female to Male 4x12 round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	
ZCM22C8HMAX 7236060	US Conec MTP Male without tab / Female to Male 4x12 round cable / OM4 / LSZH / Magenta / Polarity A / X(Length)	

MPO/MTP-LC Patch Panel(UHD/FHD)

Description

Ultra-High density Data center Cabling system and management.

Professional MPO/MTP cabling Solution.

UHD(FHD)Series is a versatile solution in multiple sizes (1U/2U/4U) and styles for building backbones, data centers, and enterprise applications.

Features

- Finishing: powder coated.
- Fits into 19-inch installations.
- Fixed sliding tray design.
- Easy to operate and maintain.
- Fixed type with a PC material front transparent cover that is convenient for observation and maintenance.
- Made by cold roll steel, electrostatic powder spraying.
- Removable Top for Easier Fiber Cable Management.
- Compliant IEC-61754-7,EIA/TIA-604-5 & RoHS.

MPO/MTP-LC Patch Panel(UHD/FHD)

Zion Code	Description
ZCUHD11F37HL1 (7236061)	1U UHD MPO/MTP-LC 144F Full cover Fixed Rack mounted Patch panel -12 cassettes
ZCUHD12F57HL1 (7236062)	2U UHD MPO/MTP-LC 288F Full cover Fixed Rack mounted Patch panel -24 cassettes
ZCUHD14F78HM1 (7236063)	4U UHD MPO/MTP-LC 576F Full cover Fixed Rack mounted Patch panel -48cassettes
ZCUHD11F92HA1 (7236064)	1U UHD MPO/MTP-LC 96F Full cover Fixed Rack mounted Patch panel -4 cassettes
ZCUHD13F52HA1 (7236065)	3U UHD MPO/MTP-LC 288F Full cover Fixed Rack mounted Patch panel -12 cassettes
ZCUHD14F62HA1 (7236066)	4U UHD MPO/MTP-LC 384F Full cover Fixed Rack mounted Patch panel -16 cassettes
ZCFHD11S17HL1 (7236067)	1U FHD MPO&MTP-LC 72F Slide Rail Rack mount patch panel -Modular design
ZCFHD11F27HL1 (7236068)	1U FHD MPO&MTP-LC 96F Standard Pxed Rack mount patch panel Max-4 modules type



WDM Multiplexers



CWDM Multiplexers

Description		Description	
4/8/16 Channel CWDM Module		3 Ports 1X2 CWDM Device	
4,8,18-Channel Mini CWDM Module		1X3 OADM ABS	
2-Channel CWDM LGX Module		8-Channel CWDM ABS Module	
8-Channel CWDM LGX Module		18-Channel CWDM LGX Module	

DWDM Multiplexers

Description		Description	
100G/200G DWDM OADM Module (4/8 Channels)		3 Ports 100G/200G 1X2 DWDM Device	
4/8/16 Channels 100G/200G DWDM Module			


FWDM Multiplexers

Description		Description	
3 Ports 980/1550nm or 1480/1550nm Filter Wavelength Division Multiplexer		3 Ports 1310/1490/1550nm Filter Wavelength Division Multiplexer	
3 Ports SM or MM 1310-1550nm Filter Wavelength Division Multiplexer			

Fiber Optic Splitter



FBT Splitter

Zion Code	Description	
7233101	Multimode Fiber Optic Splitter 1X2 ABS Box Fused Type Fiber Coupler FBT Fiber Optic Splitter	
7233102	Optical Splitter 1x4 out ABS Box Single Mode Fused Type Optical Coupler FBT Fiber Optic Splitter	
7233103	FBT Fused Type Optical Coupler FC/APC Connector 1X3	
7233104	Optical Splitter 1x4 Steel Tube Single Mode FBT Fiber Optic Splitter FC/APC connectors	
7233105	Optical Splitter 1x3 Steel Tube Single Mode Fused Type Fiber Coupler FBT Fiber Optic Splitter with or without Pber connectors	
7233106	Fiber Optic Splitter 1x2 Fiber Coupler FBT Fiber Optic Splitter Loose Tube SC/UPC Dual Window Fused Type	
7233107	1x2 Fiber Splitter Singlemode FBT Type with SC/UPC Fiber Connectors ABS Box (SC LC FC ST connectors)	

PLC Splitter - MINI TUBE

Zion Code	Description	
7233201	PLC Splitter 1×16 Single Mode Blockless 0.9mm Fiber Cable with SC/UPC SC/APC Connectors	
7233202	1×8 Fiber PLC Splitter Single Mode Blockless PLC Fiber Optic Coupler	
7233203	1×2 PLC Splitter Single Mode Blockless PLC Fiber Optic Coupler	
7233204	PLC Splitter 1×4 Single Mode Blockless PLC Fiber Optic Coupler	
7233205	PLC Splitter 1×32 Single Mode Blockless PLC Fiber Optic Coupler	
7233215	PLC Splitter 1×64 Single Mode Blockless PLC Fiber Optic Splitter	

LGX type PLC Splitter- Module

Zion Code	Description	
7233206	Optic Fiber Splitter 1X8 LGX Single Mode PLC Fiber Optic Splitter with SC FC Connection	
7233207	Fiber Optic Splitter 1×4 LGX Single Mode PLC Fiber Optic Splitter with SC FC Connection	
7233208	Fiber Optic Splitter 1×2 LGX Single Mode PLC with SC FC Connection	
7233219	PLC Fiber Splitter 1×64 LGX Single Mode PLC Fiber Optic Splitter with SC FC Connection	
7233220	Optical Splitter 1X32 LGX Single Mode PLC Splitter	
7233221	PLC Optic Fiber Splitter 1×16 LGX Single Mode with SC FC Connection	

ABS Box Type PLC Splitter- Cassette

Zion Code	Description	
7233209	PLC Optical Splitter 1×64 Single Mode PLC Fiber Optic Splitter ABS Box Type with SC Connector	
7233210	PLC Optical Splitter 1×32 Single Mode PLC Fiber Optic Splitter ABS Box Type with SC Connector	
7233211	PLC Optical Splitter 1×16 Single Mode PLC Fiber Optic Splitter ABS Box Type with SC Connector	
7233212	PLC Optical Splitter 1×8 Single Mode PLC Fiber Optic Splitter ABS Box Type with SC Connector	
7233213	PLC Optical Splitter 1×4 Single Mode PLC Fiber Optic Splitter ABS Box Type with SC Connector	
7233214	PLC Optical Splitter 1×2 Single Mode PLC Fiber Optic Splitter ABS Box Type with SC Connector	

Fiber Optic Connector



Zion's Hot Selling Type

Zion Code	Description		Zion Code	Description	
7234001	LC SX 0.9mm Pre-polished Ferrule Field Assembly Fiber Optical Connector		7234009	ST 0.9mm Pre-polished Ferrule Field Assembly Fiber Optical Connector	
7234002	LC DX 2.0mm Pre-polished Ferrule Field Assembly Fiber Optical Connector		7234010	ST 2.0/3.0mm Pre-polished Ferrule Field Assembly Fiber Optical Connector	
7234003	LC Uniboot Fiber Optical Connector		7234011	MU 0.9mm Series Fiber Optical Connector	
7234004	SC 0.9mm Pre-polished Ferrule Field Assembly Fiber Optical Connector		7234012	MTRJ Series Fiber Optical Connector	
7234005	SC 2.0/3.0mm Pre-polished Ferrule Field Assembly Fiber Optical Connector		7234013	E2000 0.9mm Series Fiber Optical Connector	
7234006	SC APC Flat Drop Cable Fiber Optical Connector		7234014	MPO Series Fiber Optical Connector	
7234001	FC 0.9mm Pre-polished Ferrule Field Assembly Fiber Optical Connector		7234002	FC 2.0/3.0mm Pre-polished Ferrule Field Assembly Fiber Optical Connector	
7234015	FAST Field Series FC Fiber Optical Connector		7234016	FAST Field Series SC Fiber Optical Connector	
7234017	FAST Field Series LC Fiber Optical Connector		7234021	SC APC Hot-Melt Fast Connector	
7234018	FAST Field FC Hot-Melt Fiber Optical Connector		7234022	SC UPC Hot-Melt Fast Connector	
7234019	LC Pre-embedded Fast Connector		7234023	SC APC Normal Type Fast Connector	
7234020	LC Straight-through Fast Connector		7234024	SC UPC Normal Type Fast Connector	

Fiber Optic Adapter



LC-LC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235001	LC APC DX Asymmetric Welding Adapter With Flange		7235008	LC APC QUAD Asymmetric Welding Adapter With Flange	
7235002	LC APC DX Asymmetric Welding Adapter Without Flange		7235009	LC APC QUAD Asymmetric Welding Adapter Without Flange	
7235003	LC APC DX High-Low Adapter		7235010	LC APC QUAD One-piece Adapter With Flange	
7235004	LC APC DX One-piece Adapter With Flange		7235011	LC APC QUAD One-piece Adapter Without Flange	
7235005	LC APC DX One-piece Adapter Without Flange		7235012	LC APC QUAD Welding Symmetry-type Adapter With Flange	
7235006	LC APC DX Welding Symmetry-type Adapter With Flange		7235013	LC APC QUAD Welding Symmetry-type Adapter Without Flange	
7235007	LC APC DX Welding Symmetry-type Adapter Without Flange		7235014	LC APC SX Adapter Without Flange	

LC-LC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235015	LC DX Metal Adapter		7235022	LC MM QUAD Asymmetric Welding Adapter With Flange	
7235016	LC MM DX Asymmetric Welding Adapter With Flange		7235023	LC MM QUAD Asymmetric Welding Adapter Without Flange	
7235017	LC MM DX Asymmetric Welding Adapter Without Flange		7235024	LC MM QUAD One-piece Adapter With Flange	
7235018	LC MM DX One-piece Adapter With Flange		7235025	LC MM QUAD One-piece Adapter Without Flange	
7235019	LC MM DX One-piece Adapter Without Flange		7235026	LC MM QUAD Welding Symmetry-type Adapter With Flange	
7235020	LC MM DX Welding Symmetry-type Adapter With Flange		7235027	LC MM QUAD Welding Symmetry-type Adapter Without Flange	
7235021	LC MM DX Welding Symmetry-type Adapter Without Flange		7235028	LC MM SX Adapter Without Flange	

LC-LC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235029	LC OM3 DX Asymmetric Welding Adapter With Flange		7235036	LC OM3 QUAD Asymmetric Welding Adapter With Flange	
7235030	LC OM3 DX Asymmetric Welding Adapter Without Flange		7235037	LC OM3 QUAD Asymmetric Welding Adapter Without Flange	
7235031	LC OM3 DX High-Low Adapter		7235038	LC OM3 QUAD One-piece Adapter With Flange	
7235032	LC OM3 DX One-piece Adapter With Flange		7235039	LC OM3 QUAD One-piece Adapter With Flange-p	
7235033	LC OM3 DX One-piece Adapter Without Flange		7235040	LC OM3 QUAD Welding Symmetry-type Adapter With Flange	
7235034	LC OM3 DX Welding Symmetry-type Adapter With Flange		7235041	LC OM3 QUAD Welding Symmetry-type Adapter Without Flange	
7235035	LC OM3 DX Welding Symmetry-type Adapter Without Flange		7235042	LC OM3 SX Adapter Without Flange	


LC-LC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235043	LC OM4 DX Asymmetric Welding Adapter With Flange		7235050	LC OM4 QUAD Asymmetric Welding Adapter With Flange	
7235044	LC OM4 DX Asymmetric Welding Adapter Without Flange		7235051	LC OM4 QUAD Asymmetric Welding Adapter Without Flange	
7235045	LC OM4 DX High-Low Adapter		7235052	LC OM4 QUAD One-piece Adapter With Flange	
7235046	LC OM4 DX One-piece Adapter With Flange		7235053	LC OM4 QUAD One-piece Adapter Without Flange	
7235047	LC OM4 DX One-piece Adapter Without Flange		7235054	LC OM4 QUAD Welding Symmetry-type Adapter With Flange	
7235048	LC OM4 DX Welding Symmetry-type Adapter With Flange		7235055	LC OM4 QUAD Welding Symmetry-type Adapter Without Flange	
7235049	LC OM4 DX Welding Symmetry-type Adapter Without Flange		7235056	LC OM4 SX Adapter Without Flange	


LC-LC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235057	LC UPC DX Asymmetric Welding Adapter With Flange		7235064	LC UPC QUAD Asymmetric Welding Adapter With Flange	
7235058	LC UPC DX Asymmetric Welding Adapter Without Flange		7235065	LC UPC QUAD Asymmetric Welding Adapter Without Flange	
7235059	LC UPC DX High-Low Adapter		7235066	LC UPC QUAD One-piece Adapter With Flange	
7235060	LC UPC DX One-piece Adapter With Flange		7235067	LC UPC QUAD One-piece Adapter Without Flange	
7235061	LC UPC DX One-piece Adapter Without Flange		7235068	LC UPC QUAD Welding Symmetry-type Adapter With Flange	
7235062	LC UPC DX Welding Symmetry-type Adapter With Flange		7235069	LC UPC QUAD Welding Symmetry-type Adapter Without Flange	
7235063	LC UPC DX Welding Symmetry-type Adapter Without Flange		7235070	LC UPC SX Adapter Without Flange	

SC-SC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235071	SC APC DX Adapter With Flange Fiber Optic Adapter/Coupler		7235080	SC MM SX Welding Adapter With Flange Fiber Optic Adapter/Coupler	
7235072	SC APC SX Adapter With Flange Fiber Optic Adapter/Coupler		7235081	SC MM SX Welding Adapter Without Flange Fiber Optic Adapter/Coupler	
7235073	SC APC SX Adapter Without Flange Fiber Optic Adapter/Coupler		7235082	SC MM With Legs Fiber Optic Adapter/Coupler	
7235074	SC APC SX Welding Adapter With Flange Fiber Optic Adapter/Coupler		7235090	SC OM4 DX Adapter With Flange Fiber Optic Adapter/Coupler	
7235075	SC APC SX Welding Adapter Without Flange Fiber Optic Adapter/Coupler		7235091	SC OM4 DX Adapter Without Flange Fiber Optic Adapter/Coupler	
7235076	SC APC With Legs Fiber Optic Adapter/Coupler		7235092	SC OM4 SX Adapter With Flange Fiber Optic Adapter/Coupler	
7235077	SC MM DX Adapter With Flange Fiber Optic Adapter/Coupler		7235093	SC OM4 SX Welding Adapter With Flange Fiber Optic Adapter/Coupler	
7235078	SC MM SX Adapter With Flange Fiber Optic Adapter/Coupler		7235094	SC OM4 SX Welding Adapter Without Flange Fiber Optic Adapter/Coupler	
7235079	SC MM SX Adapter Without Flange Fiber Optic Adapter/Coupler		7235095	SC OM4 With Legs Fiber Optic Adapter/Coupler	

SC-SC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235096	SC SX Metal Adapter Fiber Optic Adapter/Coupler		7235100	SC UPC SX Adapter Without Flange Fiber Optic Adapter/Coupler	
7235097	SC UPC DX Adapter With Flange Fiber Optic Adapter/Coupler		7235101	SC UPC SX Welding Adapter With Flange Fiber Optic Adapter/Coupler	
7235098	SC UPC DX Adapter Without Flange Fiber Optic Adapter/Coupler		7235102	SC UPC SX Welding Adapter Without Flange Fiber Optic Adapter/Coupler	
7235099	SC UPC SX Adapter With Flange Fiber Optic Adapter/Coupler		7235103	SC UPC With Legs Fiber Optic Adapter/Coupler	

FC-FC Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235104	FC SX Big D-Type Fiber Optic Adapter/Coupler		7235106	FC DX With Rectangle Flange Fiber Optic Adapter/Coupler	
7235105	FC SX With Rectangle Flange Fiber Optic Adapter/Coupler		7235107	FC SX Welding Adapter with Rectangle Flange Fiber Optic Adapter/Coupler	

ST-ST Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235108	ST SX Welding Adapter With Rectangle Flange		7235109	ST DX Adapter with Rectangle Flange	

Hybrid Type Fiber Optic Adapter

Zion Code	Description		Zion Code	Description	
7235110	SC-FC SX Hybrid Fiber Optic Adapter/Coupler		7235115	SC-LC DX Hybrid Fiber Optic Adapter/Coupler	
7235111	SC-FC DX Hybrid Fiber Optic Adapter/Coupler		7235116	SC-ST SX Hybrid Fiber Optic Adapter/Coupler	
7235112	FC-ST SX Hybrid Fiber Optic Adapter/Coupler		7235117	SC-ST DX Hybrid Fiber Optic Adapter/Coupler	
7235113	FC-ST DX Hybrid Fiber Optic Adapter/Coupler		7235118	SC APC male to SC UPC female hybrid adapter	
7235114	SC-LC SX Hybrid Fiber Optic Adapter/Coupler		7235119	SC UPC male to SC APC female hybrid adapter	

Fiber Optic Attenuator



Zion's Hot Selling Type

Zion Code	Description		Zion Code	Description	
ZC11 FXAADXX	LC APC Female to LC APC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)		ZC11 FXIIDXX	MU APC Female to MU APC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)	
ZC11 FXBBDXX	LC UPC Female to LC UPC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)		ZC12 FXJJDXX	MU UPC Female to MU UPC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)	
ZC11 FXCCDXX	SC APC Female to SC APC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)		ZC11 FXKKDXX	E2000 APC Female to E2000 APC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)	
ZC11 FXDDDXX	SC UPC Female to SC UPC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)		ZC11 FXLLDXX	E2000 UPC Female to E2000 UPC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)	
ZC12 FXEEDXX	ST APC Female to ST APC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)		ZC12 FXMMDXX	8F MPO(female)to MPO(Male)Fiber Optical Attenuator (1-20dB)	
ZC11 FXFFDXX	ST UPC Female to ST UPC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)		ZC11 FXNNDXX	12F MPO(female)to MPO(Male)Fiber Optical Attenuator (1-20dB)	
ZC11 FXGGDXX	FC APC Female to FC APC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)		ZC11 FXOODXX	24F MPO(female)to MPO(Male)Fiber Optical Attenuator (1-20dB)	
ZC11 FXHHDXX	FC UPC Female to FC UPC male Plug-in Fixed Fiber Optical Attenuator (1-25dB)				

Fiber Optic Cable Fittings



FTTH stainless steel Pat cable drop clamp

Zion Code	Size	Product Material	Bearing tensile	Per Weight	Applicable wire diameter	
FTTH stainless steel wire clamp01 ZCSSC-01	215*22*18 mm	201 stainless steel 304 stainless steel	2.0 KN	45g	Φ2-8mm	
FTTH stainless steel wire clamp02 ZCSSC-02	210*25*18 mm	201 stainless steel 304 stainless steel	2.0 KN	49g	Φ2-8mm	
FTTH stainless steel wire clamp03 ZCSSC-03	210*23.6*18 mm	201 stainless steel 304 stainless steel	1.2KN	48g	Φ2-8mm	
FTTH stainless steel wire clamp04 ZCSSC-04	210*24*20 mm	201 stainless steel 304 stainless steel	1.2KN	47g	Φ2-8mm	

FTTH nylon cable Pat cable drop clamp

FTTH nylon cable clamp01 ZCPAC-01	230*26.5*20 mm	Polyamide 6 or Polyamide 66	0.6KN	31g	Φ2-8mm	
FTTH nylon cable clamp02 ZCPAC-02	150*110*41 mm	Polyamide 6 or Polyamide 66	1.0 KN	52g	Φ3-6mm	

FTTH combination Pat cable drop clamp

FTTH combination clamp01 ZCSPC-01	230*21*18.5 mm	201 stainless steel+Polyamide 6	0.9 KN	39g	Φ2-8mm	
FTTH combination clamp02 ZCSPC-02	200*27.2*23 mm	201 stainless steel+Polyamide 6	0.9 KN	42g	Φ2-8mm	
FTTH combination clamp03 ZCSPC-03	200*27.2*23.5 mm	201 stainless steel+Polyamide 6	0.9 KN	38g	Φ2-8mm	
FTTH combination clamp04 ZCSPC-04	143*55*4 mm	201 stainless steel 304 stainless steel Polyamide 6	0.6 KN	32g	Φ2-5mm	
FTTH combination clamp05 ZCSPC-05	150*100*4 mm	201 stainless steel 304 stainless steel Polyamide 6	1.5 KN	42g	Φ2-5mm	

Please note: The above product size is the reference size of V1 version, we will continue to develop and update the size, please contact us for the latest size.

FTTH combination Pat cable drop clamp

Zion Code	Size	Product Material	Bearing tensile	Per Weight	Applicable wire diameter	
FTTH combination clamp06 ZCSPC-06	150*60*25 mm	201 stainless steel 304 stainless steel Polyamide 6	1.5 KN	42g	Φ2-5mm	
FTTH combination clamp07 ZCSPC-07	150*60*25 mm	201 stainless steel 304 stainless steel Polyamide 6	0.85KN	38g	Φ2-5mm	
FTTH combination clamp08 ZCSPC-08	130*74.5*16.5 mm	201 stainless steel 304 stainless steel Polyamide 6	1.2 KN	35g	Φ2-5mm	
FTTH combination clamp09 ZCSPC-09	110*74.5*16.5 mm	201 stainless steel 304 stainless steel Polyamide 6	1.2 KN	36g	Φ2-5mm	
FTTH combination clamp10 ZCSPC-10	145*74.5*16.5 mm	201 stainless steel 304 stainless steel Polyamide 6	1.2 KN	38g	Φ2-5mm	
FTTH combination clamp11 ZCSPC-11	135*75*19.8 mm	Polyamide 6 or Acrylonitrile Butadiene Styrene 201 stainless steel	0.6 KN	25g	Φ2-8mm	
FTTH combination clamp12 ZCSPC-12	130*74*23.5 mm	Polyamide 6 +201 stainless steel	0.6 KN	34g	Φ2-8mm	

FTTH ADSS Anchor Tension clamp

Tension clamp01 ZCPGC-01	180*65*35 mm	Polyamide 6 or Polyamide 66 Galvanized steel	1.1 KN or 2.5KN	114g	Φ2-10mm	
Tension clamp02 ZCPGC-02	220*65*35 mm	Polyamide 6 or Polyamide 66 Galvanized steel	1.1 KN or 1.5KN	81g	Φ2-10mm	
Tension clamp03 ZCPGC-03	390*65*40 mm	Polyamide 6 or Polyamide 66 201 stainlesssteel	3.5 KN	190g	Φ4-12mm	
Tension clamp04 ZCPGC-04	360*65*40 mm	Polyamide 6 or Polyamide 66 201 stainless steel	3.5 KN	132g	Φ5-8mm	
Tension clamp05 ZCPGC-05	420*90*45 mm	Polyamide 6 or Polyamide 66 201 stainless steel	6 KN	370g	Φ6-12mm	

FTTH ADSS Anchor Tension clamp

Zion Code	Size	Product Material	Bearing tensile	Per Weight	Applicable wire diameter	
Tension clamp06 ZCPGC-06	385*80*40 mm	Polyamide 6 or Polyamide 66 201 stainless steel Aluminium	15 KN	360g	Φ8-14mm	
Tension clamp07 ZCPGC-07	440*95*45 mm	Polyamide 6 or Polyamide 66 201 stainless steel	6 KN	498g	Φ8-15mm	
FTTH combination clamp08 ZCSPC-08	390*65*30 mm	Alufer+PA66+ SS201/304	8 KN	386 g	Φ10-14mm	

ADSS Suspension clamp

Suspension clamp02 ZCTGC-02	135*80*35 mm	Thermo-Plastic- Rubbermaterial+ Galvanized steel	3.8 KN	158g	Φ8-12mm	
--------------------------------	-----------------	--	--------	------	---------	---

Hoop Retractor/Pole Brackets

Zion Code	Size	Product Material	Bearing tensile	Per Weight	Application	
Hoop Retractor01 ZCGSC-01	75*31*60 mm	Galvanized steel+Aluminium	1.0 KN	119g	wall or pole	
Hoop Retractor02 ZCGSC-02	62*30*35 mm	Galvanized steel	1.1 KN	42g	wall or pole	
Hoop Retractor03 ZCGSC-03	45*40*45 mm	Galvanized steel	1.2 KN	53g	wall or pole	
Hoop Retractor04 ZCGSC-04	71*27*60 mm	Galvanized steel	1.5 KN	87g	wall or pole	
Hoop Retractor05 ZCGSC-05	66*66*55 mm	Galvanized steel	2.0 KN	116g	wall or pole	
Hoop Retractor06 ZCGSC-06	75*40*80 mm	Galvanized steel	2.5 KN	140g	wall or pole	
Hoop Retractor07 ZCGSC-07	120*70*40 mm	Galvanized steel	4.5 KN	182g	wall or pole	

Please note: The above product size is the reference size of V1 version, we will continue to develop and update the size, please contact us for the latest size.

Aluminum hoop/Pole Bracket

Zion Code	Size	Product Material	Bearing tensile	Per Weight	Application	
Aluminum hoop01 ZCALC-01	165*115*35 mm	Aluminium	8.0 KN	190g	wall or pole	
Aluminum hoop02 ZCALC-02	120*113*45 mm	Aluminium	8.5 KN	189g	wall or pole	
Aluminum hoop03 ZCALC-03	115*105*65 mm	Aluminium	9.5 KN	183g	wall or pole	
Aluminum hoop05 ZCALC-05	80*48*27 mm	Aluminium	1.5KN	62g	Overhead	

Stainless steel strip/buckle

Stainless steel strip ZCSSS-01	32*27*19 cm	201SS or 304SS	10 KN	5000g	pole	
Stainless steel buckle ZCSSB-01	19*5.7*1.5 mm	201SS or 304SS	10 KN	12g	pole	

Stainless steel ratchet tool

Stainless steel Ratchet tool ZCSSRT-01	430*190*18 mm	Galvanized steel	20KN	1780g	pole	
Stainless steel Ratchet tool ZCSSRT-02	280*150*55 mm	Galvanized steel	20KN	1850g	pole	

Please note: The above product size is the reference size of V1 version, we will continue to develop and update the size, please contact us for the latest size.

COPPER CABLING INFRASTRUCTURE



Copper Cabling Infrastructure

Zion offers a complete product solution for installing copper structured cabling systems.

Zion provides a wide selection of bulk ethernet cables, copper patch cords, patch panels, keystone jacks inline couplers, modular plugs, face plates, surface boxes, and tools. ZC's cabling system can accomplish nowadays viable solutions for destinations with very high data traffic concentration, like small businesses, large enterprises, and data centers.

Zion's professional design and advanced leading processes supported by large manufacturing capacities evoke the products to be of high quality.

Zion is keeping on new product development and constant process improvement to satisfy high data transmissions and growing demand on bandwidth parameters.



Support for common and emerging technologies


Zion's copper cabling systems support common applications as well as emerging technologies such as Power over Ethernet (PoE), Voice over IP (VoIP), and 10 Gigabit Ethernet (10GbE), to name a few.

Category 5e (CAT5e): currently defined in TIA/EIA-568-C.2 as networks up to 100 MHz for 100 Mbit/s Ethernet. This category is typically used for VoIP applications.

Category 6 (CAT6): currently defined in TIA/EIA-568-C.2 for networks up to 250 MHz, which is more than twice as high as Category 5e. This category is typically used in 1000BASE-T Gigabit Ethernet networks.

As Category 6. This category is typically used in 10GBase-T networks Category 6A (CAT6A): currently defined in ANSI/TIA-568-C2 for networks up to 500 MHz, twice as large.

Category /name of the cable	Maximum supported speed	Bandwidth / support signals rate
CAT 5E	1000 Mbps	100 MHz
CAT 6	10Gbps	250 MHz
CAT 6A	10Gbps	500 MHz
CAT 7	10Gbps	600 MHz
CAT 7A	10Gbps	1000 MHz
CAT 7A	10Gbps	1200 MHz
CAT8	40Gbps	2000 MHz

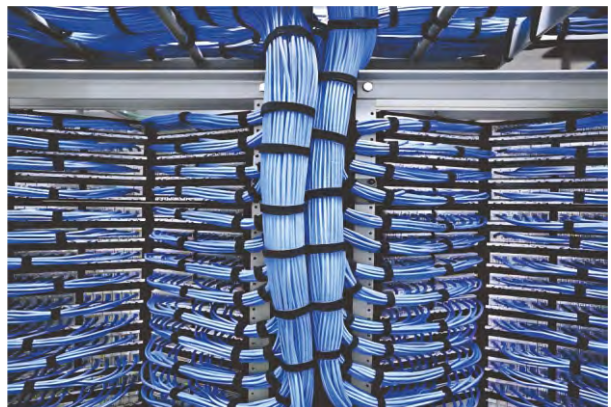

Bulk Ethernet Cables



CAT7A Bulk Ethernet Cables

7112422	S/FTP CAT7A BC PVC-Global	4x[(2x(0.58mm BC +1.33+0.05mm Foam PE)+Al/PET] +64*0.1mm TC Braid+Rip Cord +7.8±0.5mm PVC Global Market		305M Wooden Spool /Carton
7112424	S/FTP CAT7A BC PVC CMR-UL	4x[(2x(0.58mm BC +1.33+0.05mm Foam PE)+Al/PET] +64*0.1mm TC Braid+Rip Cord +7.8±0.5mm PVC CMR-UL		305M Wooden Spool /Carton
7112426	S/FTP CAT7A BC LSZH	4x[(2x(0.58mm BC +1.33+0.05mm Foam PE)+Al/PET] +64*0.1mm TC Braid+Rip Cord +7.8±0.5mm LSZH		305M Wooden Spool /Carton

CAT6A Bulk Ethernet Cables

7112302	U/UTP CAT6A BC PVC-Global	4x2x(0.57mm BC+1.02mm HDPE) +Cross Filler+Rip Cord +6.4±0.3mm PVC Global Market		305M Pull Box
7112304	U/UTP CAT6A BC PVC CMR-UL	4x2x(0.57mm BC+1.02mm HDPE) +Cross Filler+Rip Cord +6.4±0.3mm PVC CMR-UL		305M Pull Box
7112306	U/UTP CAT6A BC LSZH	4x2x(0.57mm BC+1.02mm HDPE) +Cross Filler+Rip Cord +6.4±0.3mm LSZH		305M Pull Box
7112322	U/FTP CAT6A BC PVC-Global	4x2x(0.57mm BC+1.15mm HDPE) +Cross Filler+PET+Drain wire +Al/PET + Rip Cord +7.6±0.2mm PVC Global Market		305M Wooden Spool /Carton
7112324	U/FTP CAT6A BC PVC CMR-UL	4x2x(0.57mm BC+1.15mm HDPE) +Cross Filler+PET+Drain wire +Al/PET + Rip Cord +7.6±0.2mm PVC CMR-UL		305M Wooden Spool /Carton
7112326	U/FTP CAT6A BC LSZH	4x2x(0.57mm BC+1.15mm HDPE) +Cross Filler+PET+Drain wire +Al/PET + Rip Cord +7.6±0.2mm LSZH		305M Wooden Spool /Carton

CAT6 Bulk Ethernet Cables

7112202	U/UTP CAT6 BC PVC-Global	4x2x(0.57mm BC+1.02mm HDPE) +Cross Filler+Rip Cord +6.4±0.3mm PVC Global Market		305M Pull Box
7112204	U/UTP CAT6 BC PVC CMR-UL	4x2x(0.57mm BC+1.02mm HDPE) +Cross Filler+Rip Cord +6.4±0.3mm PVC CMR-UL		305M Pull Box
7112206	U/UTP CAT6 BC LSZH	4x2x(0.57mm BC+1.02mm HDPE) +Cross Filler+Rip Cord +6.4±0.3mm LSZH		305M Pull Box
7112322	F/UTP CAT6 BC PVC-Global	4x2x(0.57mm BC+1.15mm HDPE) +Cross Filler+PET+Drain wire +Al/PET + Rip Cord +7.6±0.2mm PVC Global Market		305M Pull Box
7112324	F/UTP CAT6 BC PVC CMR-UL	4x2x(0.57mm BC+1.15mm HDPE) +Cross Filler+PET+Drain wire +Al/PET + Rip Cord +7.6±0.2mm PVC CMR-UL		305M Pull Box
7112326	F/UTP CAT6 BC LSZH	4x2x(0.57mm BC+1.15mm HDPE) +Cross Filler+PET+Drain wire +Al/PET + Rip Cord +7.6±0.2mm LSZH		305M Pull Box

CAT5E Bulk Ethernet Cables

7112102	U/UTP CAT5E BC PVC-Global	4x2x(0.5mm BC+0.91mm HDPE) +Rip Cord +5.1±0.2mm PVC Global Market		305M Pull Box
7112104	U/UTP CAT5E BC PVC CMR-UL	4x2x(0.5mm BC+0.91mm HDPE) +Rip Cord +5.1±0.2mm PVC CMR-UL		305M Pull Box
7112106	U/UTP CAT5E BC LSZH	4x2x(0.5mm BC+0.91mm HDPE) +Rip Cord +5.1±0.2mm LSZH		305M Pull Box
7112112	F/UTP CATE BC PVC-Global	4x2x(0.5mm BC+1.03mm HDPE) +PET+Drain wire +Al/PET + Rip Cord +6.2±0.2mm PVC Global Market		305M Pull Box
7112114	F/UTP CATE BC PVC CMR-UL	4x2x(0.5mm BC+1.03mm HDPE) +PET+Drain wire +Al/PET + Rip Cord +6.2±0.2mm PVC CMR-UL		305M Pull Box
7112116	F/UTP CATE BC LSZH	4x2x(0.5mm BC+1.03mm HDPE) +PET+Drain wire +Al/PET + Rip Cord +6.2±0.2mm LSZH		305M Pull Box

Copper Patch Cord | CAT6A, CAT6, CAT5E



ZION'S Code of Copper Patch Cord/Lead

SF6A 3 C O 05M GR

Customize your copper patch cord!

① ②③④ ⑤ ⑥

Cable Type	Number of conductor wires	Conductor material	Outer sheath material	Cable length		Outer sheath color			
SF6A=S/FTP CAT6A F6=F/UTP CAT6 U6=U/UTP CAT6 F5E=F/UTP CAT5E U5E=U/UTP CAT5E	1=7/0.2	C= Bare Copper	V= PVC O=LSZH	03=0.3M;	7.5=7.5M;		WH		PK
	2=7/0.16			05=0.5M;	10=10M;		BN		BL
	3=7/0.127			1=1M;	15=15M;		GN		RD
				2=2M;	20=20M;		YL		BK
				3=3M;	30=30M;		GR		VT
				5=5M;					
①	②	③	④	⑤		⑥			

CAT 6A S/FTP 28AWG Copper Conductor RJ45 Patch Cord

SF6A3CO05MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 0.5m

SF6A3CO1MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 1m

SF6A3CO2MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 2m

SF6A3CO3MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 3m

SF6A3CO5MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 5m

SF6A3CO7AMGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 7m

SF6A3CO10MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 10m

SF6A3CO15MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 15m

SF6A3CO20MGR CAT 6A S/FTP 28AWG Copper RJ45 Patch Cord, LSZH, Gray, 20m



CAT 6 FTP 26AWG Copper Conductor RJ45 Patch Cord

F62CO05MYL CAT6 F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Yellow, 0.5m

F62CO1MYL CAT 6 F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Yellow, 1m

F62CO2MYL CAT 6 F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Yellow, 2m

F62CO3MYL CAT 6 F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Yellow, 3m


F62CO5MYL CAT 6 F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Yellow, 5m

F62CO7MYL CAT 6 F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Yellow, 7m

.....

.....

F62CO35MYL CAT 6 F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Yellow, 35m

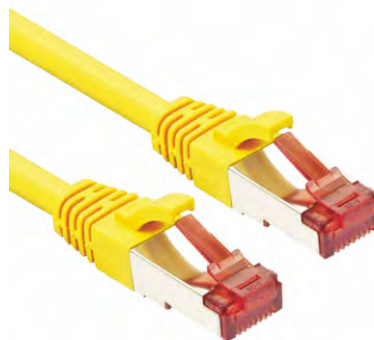

CAT 6 UTP 28AWG Copper Conductor RJ45 Patch Cord

U63CO05MBL CAT 6 U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Blue, 0.5m

U63CO1MBL CAT 6 U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Blue, 1m

U63CO2MBL CAT 6 U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Blue, 2m

U63CO3MBL CAT 6 U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Blue, 3m

U63CO5MBL CAT 6 U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Blue, 5m

U63CO7MBL CAT 6 U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Blue, 7m

.....

.....

U63CO35MBL CAT 6 U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Blue, 35m




CAT 5e FTP 26AWG Copper Conductor RJ45 Patch Cord

F5E2CO05MPK	CAT 5E F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Pink, 0.5m
F5E2CO1MPK	CAT 5E F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Pink, 1m
F5E2CO2MPK	CAT 5E F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Pink, 2m
F5E2CO3MPK	CAT 5E F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Pink, 3m
F5E2CO5MPK	CAT 5E F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Pink, 5m
F5E2CO7MPK	CAT 5E F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Pink, 7m

.....

.....

F5E2CO35MPK	CAT 5E F/UTP 26AWG Copper RJ45 Patch Cord, LSZH, Pink, 35m
-------------	--

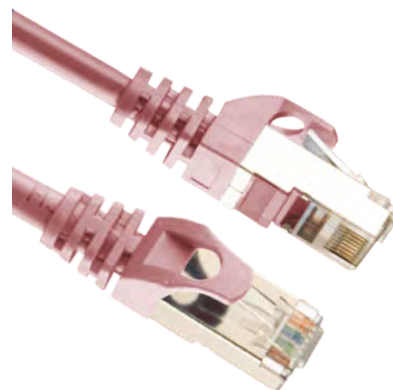

CAT 5e UTP 28AWG Copper Conductor RJ45 Patch Cord

U5E3CO05MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 0.5m
U5E3CO1MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 1m
U5E3CO2MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 2m
U5E3CO3MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 3m
U5E3CO5MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 5m
U5E3CO7MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 7m
U5E3CO10MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 10m
U5E3CO15MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 15m

.....

.....

U5E3CO100MGN	CAT 5E U/UTP 28AWG Copper RJ45 Patch Cord, LSZH, Green, 100m
--------------	--



Copper Patch Panel | CAT6A, CAT6, CAT5E, BLANK



Selecting the right type of Copper Patch Panel / RJ45 Patch Panel

Selecting the right RJ45 patch panel for your networking needs involves considering several factors to ensure compatibility, performance, and scalability. Here are the key points to consider:

- **Category-Based Patch Panels:**
CAT6A, CAT6, CAT5E, Blank
- **Rack Size & Ports Number:**
1U 24 Ports / 2U 32 or 48 Ports / 4U 96 Ports
- **Flat vs. Angled Patch Panels:**
- **Unshielded vs. Shielded Patch Panels:**



Unshielded RJ45 Patch Panel



Shielded RJ45 Patch Panel

- **Punch Down vs. Keystone Patch Panels:**



Punch Down Patch Panel



Keystone Patch Panel

CAT6A Copper Patch Panel

Zion Code	Description
ZCPPF6A-1U24-KJ-B1	FTP CAT6A 1U 24 Ports Shielded Patch Panel
ZCPPF6A-1U24-PD-B1	FTP CAT6A 1U 24 Ports Shielded Patch Panel
ZCPPF6A-1U48-PD-B1	FTP CAT6A 1U 48 Ports Shielded Patch Panel
ZCPPU6A-1U24-KJ-B1	UTP CAT6A 1U 24 Ports Unshielded Patch Panel
ZCPPU6A-1U24-KJ-B2	UTP CAT6A 1U 24 Ports Unshielded Patch Panel




CAT6 Copper Patch Panel

Zion Code	Description	
ZCPPF6-1U24-KJ-B1	FTP CAT6 1U 24 Ports Shielded Patch Panel	
ZCPPF6-1U24-PD-B1	FTP CAT6 1U 24 Ports Shielded Patch Panel	
ZCPPF6-1U48-PD-B1	FTP CAT6 1U 48 Ports Shielded Patch Panel	
ZCPPU6-1U12-PD-B1	UTP CAT6 1U 12 Ports Unshielded Patch Panel	
ZCPPU6-1U24-KJ-B1	UTP CAT6 1U 24 Ports Unshielded Patch Panel Modules Type	
ZCPPU6-1U24-PD-B1	UTP CAT6 1U 24 Ports Unshielded Patch Panel Punch Down Type	
ZCPPU6-2U48-KJ-B1	UTP CAT6 2U 48 Ports Unshielded Patch Panel	

CAT5E Copper Patch Panel

Zion Code	Description	
ZCPPF5E-1U24-KJ-B1	FTP CAT5E 1U 24 Ports Shielded Patch Panel	
ZCPPF5E-1U24-PD-B1	FTP CAT5E 1U 24 Ports Shielded Patch Panel	
ZCPPF5E-1U48-PD-B1	FTP CAT5E 1U 48 Ports Shielded Patch Panel	
ZCPPU5E-1U12-PD-B1	UTP CAT5E 1U 12 Ports Unshielded Patch Panel	
ZCPPU5E-1U24-KJ-B1	UTP CAT5E 1U 24 Ports Unshielded Patch Panel	
ZCPPU5E-1U24-PD-B1	UTP CAT5E 1U 24 Ports Unshielded Patch Panel	
ZCPPU5E-2U48-KJ-B1	UTP CAT5E 2U 48 Ports Unshielded Patch Panel	
ZCPPU5E-2U48-PD-B1	UTP CAT5E 2U 48 Ports Unshielded Patch Panel	

Blank Copper Patch Panel

Zion Code	Description	
ZCAPPF-1U24-B1	FTP CAT5E/6/6A 1U 24 Ports Shielded Angled Blank Patch Panel	
ZCAPPU-1U24-B1	UTP CAT5E/6/6A 1U 24 Ports Unshielded Angled Blank Patch Panel	
ZCBPPF-1U24-B1	FTP CAT6/6A 1U 24 Ports Shielded Blank Patch Panel	
ZCBPPF-2U48-B1	FTP CAT6 /6A 2U 48 Ports Shielded Blank Patch Panel	
ZCBPPF-1U48-B2	FTP CAT6/6A 1U 24 Ports Shielded Blank Patch Panel	
ZCBPPU-1U48-B3	UTP CAT6/6A 1U 48 Ports Unshielded Blank Patch Panel	
ZCBPPU-1U24-B1	UTP CAT6/6A 1U 24 Ports Unshielded Blank Patch Panel	
ZCBPPU-1U24-Q2	UTP CAT6/6A 1U 24 Ports Unshielded Blank Patch Panel	
ZCBPPU-2U48-B1	FTP CAT6/6A 2U 48 Ports Unshielded Blank Patch Panel	
ZCBPPF-1U24-Q1	FTP CAT6/6A 1U 24 Ports Shielded Blank Patch Panel	
ZCBPPFS-1U24-Q1	FTP CAT6/6A 1U 24 Ports Shielded Blank Patch Panel With Shutters	

Keystone Jacks | CAT8, CAT6A, CAT6, CAT5E



How to chose a right keystone jack?

RJ45 keystone jacks, essential components in networking for connecting Ethernet cables, come in various types to suit different networking requirements. Please follow the steps below to identify the RJ45 keystone jack for you

■ **1, Determine the type of cable you will be using. Consider the category (e.g., Cat 8, Cat 6a, Cat 6, Cat 5e).**

■ **2, Consider whether the environment requires shielded or unshielded jacks.**



■ **3, Decide Punch Down vs. Toolless:**


· **Punch Down:** Requires a punch-down tool to terminate the cable wires onto the jack.

· **Toolless:** Designed for easy, tool-free installation, where the wires are placed and secured without special tools.

■ **4, Consider the space where the jack will be installed. Then decide Angled or Straight, & also the degree.**

45° Angled Termination Ports Design
Allow Easy Separation and Installation of Wires

Punch Down Direction

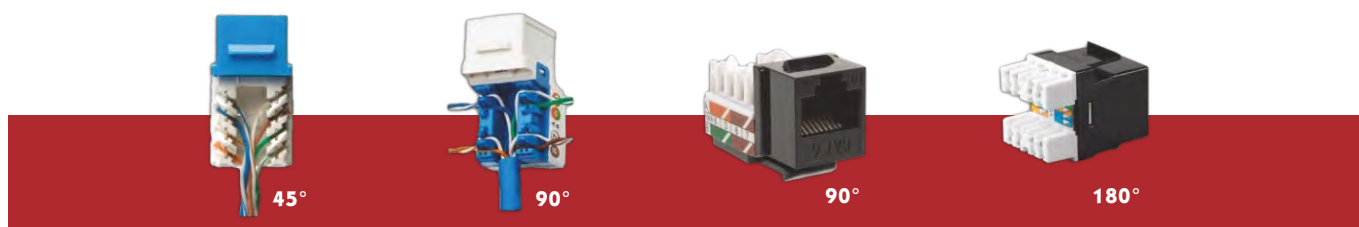

■ **5, Compatibility with Keystone Plates and Panels**

· Ensure the keystone jacks are compatible with your keystone plates, patch panels, or surface mount boxes.

· Check the dimensions if you are using a non-standard setup.

■ **6, Color Coding and Labeling**

· Color-coded jacks can be useful for identifying different networks or services.

· Labeling is especially helpful in complex installations with multiple connections.

FTP CAT8 Keystone Jacks

Zion Code	Description		Zion Code	Description	
ZCTL KJF8-B1	FTP CAT8 Toolless Keystone Jack		ZCTL KJF8-Q1	FTP CAT8 Toolless Keystone Jack	

FTP CAT6A Keystone Jacks

Zion Code	Description		Zion Code	Description	
ZC180 KJF6A-B2	FTP CAT6A RJ45 180 Degree Keystone Jack		ZCTL KJF6A-B1	FTP CAT6A Toolless Keystone Jack	
ZCTL KJF6A-B1	FTP CAT6A Toolless Keystone Jack With Full Lock				

FTP CAT6 Keystone Jacks

Zion Code	Description		Zion Code	Description	
ZC180 KJF6-B2	FTP CAT6 RJ45 180 Degree Keystone Jack		ZCTL KJF6-B1	FTP CAT6 Toolless Keystone Jack	
ZC180 KJF6-B3	FTP CAT6 RJ45 180 Degree Keystone Jack		ZCTL KJF6-B1	FTP CAT6 Toolless Keystone Jack With Full Lock	

FTP CAT5E Keystone Jacks

Zion Code	Description		Zion Code	Description	
ZC180 KJF5E-B2	FTP CAT5E RJ45 180 Degree Keystone Jack		ZCTL KJF5E-B1	FTP CAT5E Toolless Keystone Jack	
ZCTL KJF5E-B1	FTP CAT5E Toolless Keystone Jack With Full Lock				

UTP CAT6A Keystone Jacks

Zion Code	Description		Zion Code	Description	
ZC180 KJU6A-B1	UTP CAT6A RJ45 180 Degree Keystone Jack		ZCMKJ180 U6A-B1	UTP CAT6A RJ45 180 Degree Keystone Jack MINI Body	
ZC90 KJU6A-B1	UTP CAT6A RJ45 90 Degree Keystone Jack		ZCMSKJ 180U6A-B1	UTP CAT6A RJ45 180 Degree Keystone Jack MINI Body With Shutter	
ZC90 KJU6A-B2	UTP CAT6A RJ45 90 Degree Keystone Jack		ZC90 KJU6A-B3	UTP CAT6A RJ45 90 Degree Keystone Jack	
ZCTLH KJU6A-B1	UTP CAT6A Toolless Keystone Jack With Cable Holder		ZCTLHS KJU6A-B1	UTP CAT6A Toolless Keystone Jack With Cable Holder & Shutter	
ZCTL KJU6A-B2	UTP CAT6A Toolless Keystone Jack				

Keystone Jacks with LED

Zion Code	Description	
ZC180 KJU6L-D1	UTP CAT6 RJ45 180 degree keystone jack with LED	

UTP CAT6 Keystone Jacks

Zion Code	Description		Zion Code	Description	
ZC180 KJU6-B1	UTP CAT6 RJ45 180 Degree Keystone Jack		ZCMSKJ180 U6-B1	UTP CAT6 RJ45 180 degree Keystone Jack MINI body With Shutter	
ZC90 KJU6-B1	UTP CAT6 RJ45 90 Degree Keystone Jack		ZCTLH KJU6-B1	UTP CAT6 Toolless Keystone Jack With Cable Holder	
ZC90 KJU6-B2	UTP CAT6 RJ45 90 Degree Keystone Jack		ZCTLHS KJU6-B1	UTP CAT6 Toolless Keystone Jack With Cable Holder & Shutter	
ZC90 KJU6-B3	UTP CAT6 RJ45 90 Degree Keystone Jack		ZCTL KJU6-B1	UTP CAT6 Toolless Keystone Jack	
ZCMSKJ180 U6-B1	UTP CAT6 RJ45 180 Degree Keystone Jack MINI Body		ZCTL KJU6-B2	UTP CAT6 Toolless Keystone Jack	

UTP CAT5E Keystone Jacks

Zion Code	Description		Zion Code	Description	
ZC180 KJU5E-B1	UTP CAT5E RJ45 180 Degree Keystone Jack		ZC90 KJU5E-B3	UTP CAT5E RJ45 90 Degree Keystone Jack	
ZC90 KJU5E-B1	UTP CAT5E RJ45 90 Degree Keystone Jack		ZCMSKJ180 U5E-B1	UTP CAT5E RJ45 180 Degree Keystone Jack MINI Body With Shutter	
ZC90 KJU5E-B2	UTP CAT5E RJ45 90 Degree Keystone Jack		ZCTL KJU5E-B1	UTP CAT5E Toolless Keystone Jack	

RJ45/Ethernet Coupler | CAT6A, CAT6, CAT5E



FTP CAT6A Inline Coupler

Zion Code	Description		Zion Code	Description	
ZCIC F6A-B1	FTP CAT6A Shielded Inline Coupler Type F		ZCIC F6A-B2	FTP CAT6A RJ45-RJ45 Shielded Inline Coupler 90 Degree	
ZCIC F6A-B3	CAT6A FTP RJ45-RJ45 Shielded Inline Coupler		ZCIC 90F6A-B1	CAT6A FTP RJ45-RJ45 Shielded Inline Coupler 90 Degree	
ZCIC 180F6A-B1	CAT6A FTP RJ45-RJ45 Shielded Inline Coupler 180 Degree				

FTP CAT6 Inline Coupler

Zion Code	Description		Zion Code	Description	
ZCIC F6-B1	FTP CAT6 Shielded Inline Coupler Type E		ZCIC F6-B2	FTP CAT6 RJ45-RJ45 Shielded Inline Coupler 90 Degree	
ZCIC F6-B3	CAT6 FTP RJ45-RJ45 Shielded Inline Coupler		ZCIC F6-B4	CAT6 FTP RJ45-RJ45 Shielded Inline Coupler	
ZCIC F6-B5	CAT6 FTP RJ45-RJ45 Shielded Inline Coupler		ZCIC 90F6-B1	CAT6 FTP RJ45-RJ45 Shielded Inline Coupler 90 Degree	
ZCIC 180F6-B1	CAT6 FTP RJ45-RJ45 Shielded Inline Coupler 180 Degree				

FTP CAT5E Inline Coupler

Zion Code	Description		Zion Code	Description	
ZCIC F5E-B1	FTP CAT5E Shielded Inline Coupler Type D		ZCIC F5E-B2	FTP CAT5E Shielded Inline Coupler Type H	

UTP CAT6A Inline Coupler

Zion Code	Description		Zion Code	Description	
ZCIC U6A-B1	UTP CAT6A Unshielded Inline Coupler Type C		ZC ICU6A-B2	UTP CAT6A Unshielded Inline Coupler Type G	

UTP CAT6 Inline Coupler

Zion Code	Description		Zion Code	Description	
ZCIC U6-B1	UTP CAT6 Unshielded Inline Coupler Type A		ZCIC U6-B2	UTP CAT6 Unshielded Inline Coupler Type B	
ZCIC U6-B3	CAT6 UTP RJ45-RJ45 Unshielded Inline Coupler		ZCIC U6-B4	CAT6 UTP RJ45-RJ45 Unshielded Inline Coupler	

UTP CAT5E Inline Coupler

Zion Code	Description		Zion Code	Description	
ZCIC U5E-B1	UTP CAT5E Unshielded Inline Coupler Type A		ZCIC U5E-B2	UTP CAT5E Unshielded Inline Coupler Type B	

- Each type of RJ45 coupler serves a specific purpose and choosing the right one depends on the networking requirements, the type of Ethernet cables used, and the environmental conditions where they will be deployed.



**Unshielded
Inline Coupler**



**Shielded
Inline Coupler**



**Unshielded
Keystone Coupler**



**Shielded
Keystone Coupler**



**Weatherproof
RJ45 Coupler**

RJ45 Connector/Modular Plug | CAT7, CAT6A, CAT6, CAT5E, CAT3



How to select the Correct RJ45 Connector/Modular Plug?

■ 1, Checking below importing data of the Ethernet Cable(CAT8, CAT7, CAT6A, CAT6, CAT5E):

- OD of Out Jacket: Measure the overall diameter of the Ethernet cable, typically expressed in millimeters (mm).
- OD of Insulation: Determine the diameter of the insulation, oft en measured in millimeters.
- OD of Conductor: 22AWG, 23AWG, 24AWG.

■ 2, ConKrm key points of the RJ45 Connector

- Close End (Regular) Plug or Pass Through (EZ) Plug?



- Single-piece or Two-piece RJ45 Connectors?



- Gold Plating Thickness of RJ45 Plugs



CAT 7/CAT 6A RJ45 Connectors/Modular Plug

Zion Code	Description		Zion Code	Description	
7246211 ZC-MP6- 88SRFTC-S1	8P/8C, CAT6, Shielded, Round, Fix Tail Clamp 8-position, Crystal head		7246214 ZC-MP7- 88SR145-S1	8P/8C, CAT7, Shielded, Round, Fix Tail Clamp 8-position, 1.45mm Insulation OD, Crystal head	
7246212 ZC-MP6A- 88UR-S1	8P/8C, CAT6A, Unshielded, Round, 8-position, Crystal head		7246221 ZC-MP6A- 88SRG-S1	8P/8C, Three-piece Gold-plated, CAT6A, Shielded, Round, 8-position, Crystal head	
7246213 ZC-MP7- 88SR130-S1	8P/8C, CAT7, Shielded, Round, Fix Tail Clamp 8-position, 1.30mm Insulation OD, Crystal head		7246222 ZC-MP7- 88SRG-S1	8P/8C, Three-piece Gold-plated, CAT7, Shielded, Round, Fix Tail Clamp 8-position, 1.45mm Insulation OD, Crystal head	

CAT 6 RJ45 Connectors/Modular Plug

Zion Code	Description		Zion Code	Description	
7246207 ZC-MP6-88UR-S1	8P/8C, CAT6, Unshielded, Round, 8-position, Crystal head		7246210 ZC-MP6-88SR-S1	8P/8C, CAT6, Shielded, Round, 8-position, Crystal head	
7246208 ZC-MP6-88URS2P-S1	8P/8C, 2 PCS, CAT6, Unshielded, round, 8-position, Short crystal head		7246218 ZC-MP6-88SRG-S1	8P/8C, CAT6, Shielded, Round, Fix Tail Clamp 8-position, Crystal head	
7246209 ZC-MP6-88URPT	8P/8C, CAT6, Unshielded, Round, 8-position, Pass Through crystal head		7246219 ZC-MP6-88SSG-S1	8P/8C, CAT6, Shielded, Round, Fix Tail Clamp 8-position, Crystal head	
7246220 ZC-MP6-88URF-S1	8P/8C, CAT6, Shielded, Round, Fix Tail Clamp 8-position, Crystal head				

CAT 5E RJ45 Connectors/Modular Plug

Zion Code	Description		Zion Code	Description	
7246204 ZC-MP5E 88URPT-S1	8P/8C, CAT5E, Unshielded, Round, Pass Through 4.7-5.2 mm cable jack OD, 8-position, Crystal head		7246216 ZC-MP 88UFS-S1	8P/8C, CAT5E, Unshielded, Flat over, 8-position, Short crystal head	
7246205 ZC-MP5E 88SR-S1	8P/8C, CAT5E, Shielded, Round, 4.8-5.6 mm cable Jack OD, 8-position, Crystal head		7246217 ZC-MP5E 88UR-S1	8P/8C, CAT5E, Unshielded, round, 4.7-5.2 mm cable jack OD, 8-position, Crystal head	
7246215 ZC-MP5E 88SFS-S1	8P/8C, CAT5E, Shielded, Flat, Max.2.54 x 8.89 mm cable jack OD, 8-position, Short crystal head				

CAT 3 Registered Connectors/Modular Plug

Zion Code	Description		Zion Code	Description	
7246201 ZC-MP3-62UR	6P/2C, CAT3, Unshielded, Round, 6-position, Crystal head		7246203 ZC-MP3-66UR-S1	6P/6C, CAT3, Unshielded, Round, 6-position, Crystal head	
7246202 ZC-MP3-64UR-S1	6P/4C, CAT3, Unshielded, Round, 6-position, Crystal head				

Free Pressure Toolless Plug | CAT8, CAT7, CAT6A, CAT6, CAT5E




Tool Free RJ 45 Connector

Zion Code	Description		Zion Code	Description	
7246901	CAT5e RJ45 UTP Toolless Plug Without Fixed Ring ZC-688Y-C5E-B1		7246907	CAT5E RJ45 FTP Toolless Plug With Metal Batch ZC-G40S-4-C5E-B1	
7246902	CAT5E RJ45 UTP Toolless Plug With Fixed Ring ZC-688X-C5E-B1		7246908	CAT6 RJ45 FTP Toolless Plug With Metal Batch ZC-G40S-4-C6-B1	
7246903	CAT6 RJ45 UTP Toolless Plug Without Fixed Ring ZC-688Y-C6-B1		7246909	CAT6A RJ45 FTP Toolless Plug With Metal Batch ZC-G40S-4-C6A-B1	
7246904	CAT6 RJ45 UTP Toolless Plug With Fixed Ring ZC-688X-C6-B1		7246910	CAT7 RJ45 FTP Toolless Plug With Metal Batch ZC-G40S-4-C7-B1	
7246905	CAT6A RJ45 UTP Toolless Plug Without Fixed Ring ZC-G40U-C6A-B1		7246911	CAT8 RJ45 FTP Toolless Plug With Metal Batch ZC-G40S-4-C8-B1	
7246906	CAT6A RJ45 UTP Toolless Plug With Fixed Ring ZC-688X-C6A-B1				

Network Faceplate



86 Type

Zion Code	Description		Zion Code	Description	
ZC86S-45A1P-B1	Face Plate 1 port, 45 Degree 86*86mm		ZC86S-2P-B1	86 Type 2 ports Face plate With shutter 86*86mm	
ZC86S-45A2P-B1	Face Plate 2 ports, 45 Degree 86*86mm		ZC86S-1P-B2	86 Type 1 port Face plate With shutter 86*86mm	
ZC86SI-1P-B1	86 Type 1 port Face plate With shutter & icon 86*86mm		ZC86S-2P-B2	86 Type 2 ports Face plate With shutter 86*86mm	
ZC86SI-2P-B1	86 Type 2 ports Face plate With shutter & icon 86*86mm		ZC86S-4P-B2	86 Type 4 ports Face plate With shutter 86*86mm	
ZC86S-1P-B1	86 Type 1 port Face plate With shutter 86*86mm				

UK Type

Zion Code	Description		Zion Code	Description	
ZCUK 86BB-B1	UK Type Back Box 86*86*36mm		ZCUK 86-2P-B2	UK Type bevel Face Plate 2 ports 86*86mm	
ZCUK 86-1P-B1	UK Type flat Face Plate 1 port 86*86mm		ZCUK 86-4P-B2	UK Type bevel Face Plate 4 ports 80*150mm	

UK Type

Zion Code	Description		Zion Code	Description	
ZCUK 86-2P-B1	UK Type flat Face Plate 2 ports 86*86mm		ZC86S- 1P-B3	UK Type flat Face Plate 1 port use for Keystone jacks 86*86mm	
ZCUK 86-4P-B1	UK Type flat Face Plate 4 ports 80*150mm		ZC86S- 2P-B3	UK Type flat Face Plate 2 ports use for Keystone jacks 86*86mm	

German Type

Zion Code	Description		Zion Code	Description	
ZCGER S5E-2P-B1	GERMAN Type, STP Cat5E 2 Ports Face Plate 80*65*32mm		ZCGER S6-2P-B2	GERMAN Type, STP Cat6 2 Ports Face Plate 80*80mm	
ZCGER S6-2P-B1	GERMAN Type, STP Cat6 2 Ports Face Plate 80*65*32mm		ZCGER S6-1P-B3	GERMAN Type, STP Cat6 1 Port Face Plate 80*80mm	
ZCGER U6-2P-B1	CAT6 Dual ports Unshielded Faceplate 80*80mm		ZCGER S6-2P-B3	GERMAN Type, STP Cat6 2 Ports Face Plate 80*80mm	
ZCGER S5E-2P-B2	GERMAN Type, STP Cat5E 2 Ports Face Plate 80*80mm				

USA Type

Zion Code	Description		Zion Code	Description	
ZCUSA- 1P-B1	USA Type Face Plate 1 port, 70*115mm		ZCUSA- 3P-B1	USA Type Face Plate 3 ports, 70*115mm	
ZCUSA- 2P-B1	USA Type Face Plate 2 ports, 70*115mm		ZCUSA- 4P-B1	USA Type Face Plate 4 ports, 70*115mm	

USA Type

Zion Code	Description		Zion Code	Description	
ZCUSA-6P-B1	USA Type Face Plate 6 ports 70*115mm		ZCUSAI-3P-B1	USA Type notches Plate 3 ports with icon 70*115mm	
ZCUSAI-1P-B1	USA Type notches Plate 1 port with icon 70*115mm		ZCUSAI-4P-B1	USA Type notches Plate 4 ports with icon 70*115mm	
ZCUSAI-2P-B1	USA Type notches Plate 2 ports with icon 70*115mm		ZCUSAI-6P-B1	USA Type notches Plate 6 ports with icon 70*115mm	

French Type

Zion Code	Description		Zion Code	Description	
ZCFR-1P-B1	French Type Face Plate 1 port, 22.5*45mm		ZCFR-BB-B2	French Type Back Box 80*150mm	
ZCFRS-1P-B2	French Type Face Plate 1 port with shutter 45*45mm		ZCFR-1P-B4	French Type Face Plate 1 port, 80*80mm	
ZCFRSI-2P-B2	French Type Face Plate 2 ports with shutter & icon 45*45mm		ZCFR-2P-B4	French Type Face Plate 2 ports, 80*150mm	
ZCFR-1P-B3	French Type Face Plate use for 45*45mm Face Plate 80*80mm		ZCFRS-SL-B3	French Type Face Plate Single port with shutter 50*50mm	
ZCFR-BB-B1	French Type Back Box 80*80mm		ZCFRS-DL-B3	French Type Face Plate Dual ports with shutter 50*50mm	

New type

Zion Code	Description		Zion Code	Description	
ZC86SI-1P-B2	86 Type 1 port Face plate with shutter & icon		ZC86SS-1P-B1	86 Type 1 port Face plate with Silver spraying & with Shutter	
ZC86SI-2P-B2	86 Type 2 ports Face plate with shutter & icon		ZC86SS-2P-B1	86 Type 2 ports Face plate with Silver spraying & with Shutter	
ZC86SI-3P-B2	86 Type 3 ports Face plate with shutter & icon		ZC86GS-1P-B1	86 Type 1 port Face plate with gold spraying & with Shutter	
ZC86SI-4P-B2	86 Type 4 ports Face plate with shutter & icon		ZC86GS-2P-B1	86 Type 2 ports Face plate with gold spraying & with Shutter	
ZC86SI-1P-B3	86 Type 1 port Face plate with shutter & icon		ZCUK86 BB-B2	86 Type Bottom box 86*86*45mm	
ZC86SI-2P-B3	86 Type 2 ports Face plate with shutter & icon		ZC120 BB-B1	120 Type Bottom box 115*72*37mm	
ZC86SI-4P-B3	86 Type 4 ports Face plate with shutter & icon		ZC86 BB-B1	86 Type Bottom box 86*86*37mm	

New type

Zion Code	Description		Zion Code	Description	
ZC86-1P-D1	86 Type 1 port Face Plate Detachable 86*86mm		ZC86SI-1P-D2	86 Type 1 port Face Plate with shutter & icon 86*86mm	
ZC86-2P-D1	86 Type 2 ports Face Plate Detachable 86*86mm		ZC86SI-2P-D2	86 Type 2 ports Face Plate with shutter & icon 86*86mm	
ZC86GS-1P-D1	86 Type 1 port Face plate with gold spraying & with Shutter		ZC86SI-1P-D3	86 Type 1 port Face Plate with shutter & icon 86*86mm	
ZC86GS-2P-D1	86 Type 2 ports Face plate with gold spraying & with Shutter		ZC86SI-2P-D3	86 Type 2 ports Face Plate with shutter & icon 86*86mm	
ZC86SM-1P-D1	86 Type 1 port Face Plate with Metal back frame 86*86mm		ZC86SI-4P-D1	86 Type 4 ports Face Plate with shutter & icon 86*86mm	
ZC86SM-2P-D1	86 Type 2 ports Face Plate with Metal back frame 86*86mm		ZC86SI-2P-D4	86 Type 2 ports Face Plate with shutter & icon 86*86mm	
ZC86S-45A1P-D1	86 Type 1 port Face Plate 45 Degree 86*86mm		ZC86S-45A4P-D1	86 Type 4 ports Face Plate with shutter & icon 86*86mm	
ZC86S-45A2P-D1	86 Type 2 ports Face Plate 45 Degree 86*86mm		ZCFRSI-2P-D1	French Type 2 ports Face Plate with shutter & icon 45*45mm	

RJ45 Surface Box



Blank

Zion Code	Description		Zion Code	Description	
ZCKJ-blank-1P-B1	Surface Box 1 port, Type A Blank=without Keystone jack		ZCKJ-blank-2P-B1	Surface Box 2 ports, Type A Blank=without Keystone jack	
ZCKJ-blank-1P-B2	Surface Box 1 port, Type B Blank=without Keystone jack		ZCKJ-blank-2P-B2	Surface Box 2 ports, Type B 3):Blank=without Keystone jack	
ZCKJ-blank-1P-B3	Surface Box 1 port, Type C Blank=without Keystone jack		ZCKJ-blank-2P-B3	Surface Box 2 ports, Type C Blank=without Keystone jack	

UTP CAT5E

Zion Code	Description		Zion Code	Description	
ZCKJU5E-1P-B1	Surface Box 1 port, Type A 1):with 1 pcs Cat5e Keystone jack 2):Surface Box 1 Port Cat5e Jack		ZCKJU5E-2P-B1	Surface Box 2 port, Type A 1):with 2 pcs Cat5e Keystone jack 2):Surface Box 2 Ports Cat5e Jack	
ZCKJU5E-1P-B2	Surface Box 1 port, Type B 1):with 1 pcs Cat5e Keystone jack 2):Surface Box 1 Port Cat5e Jack		ZCKJU5E-2P-B2	Surface Box 2 ports, Type B 1):with 2 pcs Cat5e Keystone jack 2):Surface Box 2 Ports Cat5e Jack	
ZCKJU5E-1P-B3	Surface Box 1 port, Type C 1):with 1 pcs Cat5e Keystone jack 2):Surface Box 1 Port Cat5e Jack		ZCKJU5E-2P-B3	Surface Box 2 ports, Type C 1):with 2 pcs Cat5e Keystone jack 2):Surface Box 2 Ports Cat5e Jack	
ZCPDU5E-1P-B1	Surface Box 1 Port Cat5e PCB Jack		ZCPDU5E-2P-B1	Surface Box 2 Ports Cat5e Jack	

UTP CAT6

Zion Code	Description		Zion Code	Description	
ZCKJU6-1P-B1	Surface Box 1 port, Type A 1):with 1 pcs Cat6 Keystone jack 2):Surface Box 1 Port UTP Cat6 Jack		ZCKJU6-2P-B1	Surface Box 2 ports, Type A 1):with 2 pcs Cat6 Keystone jack 2):Surface Box 2 Ports UTP Cat6 Jack	
ZCKJU6-1P-B2	Surface Box 1 port, Type B 1):with 1 pcs Cat6 Keystone jack 2):Surface Box 1 Port UTP Cat6 Jack		ZCKJU6-2P-B2	Surface Box 2 ports, Type B 1):with 2 pcs Cat6 Keystone jack 2):Surface Box 2 Ports UTP Cat6 Jack	
ZCKJU6-1P-B3	Surface Box 1 port, Type C 1):with 1 pcs Cat6 Keystone jack 2):Surface Box 1 Port UTP Cat6 Jack		ZCKJU6-2P-B3	Surface Box 2 ports, Type C 1):with 2 pcs Cat6 Keystone jack 2):Surface Box 2 Ports UTP Cat6 Jack	

FTP Shield Connection Box

Zion Code	Description		Zion Code	Description	
ZCPDF5E-B2	Connection Box Shielded type B with FTP Cat5E Krone IDC block		ZCPDF6-B2	Connection Box Shielded type B with FTP Cat6 Krone IDC block	

UTP Unshield Connection Box

Zion Code	Description		Zion Code	Description	
ZCPDU5E-B1	Connection Box Unshielded type A with UTP Cat5e Krone IDC block		ZCPDU6-B1	Connection Box Unshielded type A with UTP Cat6 Krone IDC block	

Copper Trunk Cables



CAT6A Trunk Cables

Description

Description

Cat 6a S/FTP
Jack to Jack Trunk Cables



Cat 6a S/FTP
Plug to Plug Trunk Cables



Cat 6a S/FTP
Plug to Jack Trunk Cables



CAT6 Trunk Cables

Description

Description

Cat 6 UTP
Jack to Jack Trunk Cables



Cat 6 UTP
Plug to Plug Trunk Cables



Cat 6 UTP
Plug to Jack Trunk Cables



CAT5E Trunk Cables

Description

Description

Cat 5e UTP
Jack to Jack Trunk Cables



Cat 5e UTP
Plug to Jack Trunk Cables



Cat 5e UTP
Plug to Plug Trunk Cables



Networking tools & Accessories



Zion's Hot Selling Type

Zion Code	Description	
ZCCS002-Y	Modular Plug Crimps Strips & Cuts Tool 6P+8P- Regular 8P8C (RJ45), 6P6C (RJ12), 6P4C (RJ12), 6P2C (RJ12) CAT6 / CAT7 / CAT5E / CAT5	
ZCCS003-B	Modular Crimps Strips & Cuts Tool 6P+8P - EZ / End Pass Through 8P8C (RJ45), 6P6C (RJ12), 6P4C (RJ12), 6P2C (RJ12) CAT6 / CAT7 / CAT5E / CAT5	
ZCCS003-YB	Modular Crimps Strips & Cuts Tool 4P+6P+8P Normal Type 8P8C (RJ45), 6P6C (RJ12), 6P4C (RJ12), 6P2C (RJ12), 4P4C(RJ11) CAT6 / CAT7 / CAT5E / CAT5	
ZCMPCT001-BBE	Modular Plug crimping Tool-EZ / End Pass Through 8P8C (RJ45) CAT5E / CAT6 / CAT7	
ZCPDT001-O	Punch Down Tool-Suitable for network/telephone distribution frame, network/telephone module	
ZCPDT002-G	Punch Down Tool-Network Impact Block Termination Tool with 110 Blade Type	
ZCRCCS001-G	Rotary Coaxial Cable Stripper-Cutter Tool RG6 RG59 Quad, Dual	
ZCWST001-G	Wire Stripper Tool-UTP/STP Cable Stripper for Round or Flat Cable	

CABINET & RACKS



Service Cabinet



VE Service Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- 19" rails: 2.0mm
- Casters tray: 2.0mm
- others: 1.2mm

Color

- ZCVE ■■■■■■0 ■■: RAL7035
- ZCVE ■■■■■■1 ■■: RAL7021

Loading Capacity

- Static loading: 1300KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip fingerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The finished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

Packaging

VE cabinets could be shipped in disassembled packing, saving transportation and storage cost.

Frame

duplex profile frames with patent, could be connected by 8 pieces of screws.

Cable entries on top and bottom

sliding and adjustable cable entries on top and bottom, edges of cable entries are with the design to prevent wires from scratching.

Mounting rails

installation positions of mounting rails could be adjusted quickly. Dedicated channel alignment reserved in internal of cabinets.

New appearance design

Sidedoor: split into 2 parts, lockable with square locks.
Front and rear door: pluggable front door and rear doors, with external hinges.
Casters: built-in installation design.

Front and rear doors

"two points" locking design making doors and frames closed tighter, turning angle up to 180 degrees.

Fan unit

installed from top outside of cabinet, easy to install and maintain.



Feature




- 19" mounting angle with scale enables users to precisely locate profiles.



- 19" zinc-coated profile with scale.



- The multi-function cable manager is available at the rear.



- Safety Warning label.




- Cable Entrance at the bottom is adjustable.



- Cable manager with cover is available for 800mm width cabinet.

Products Information

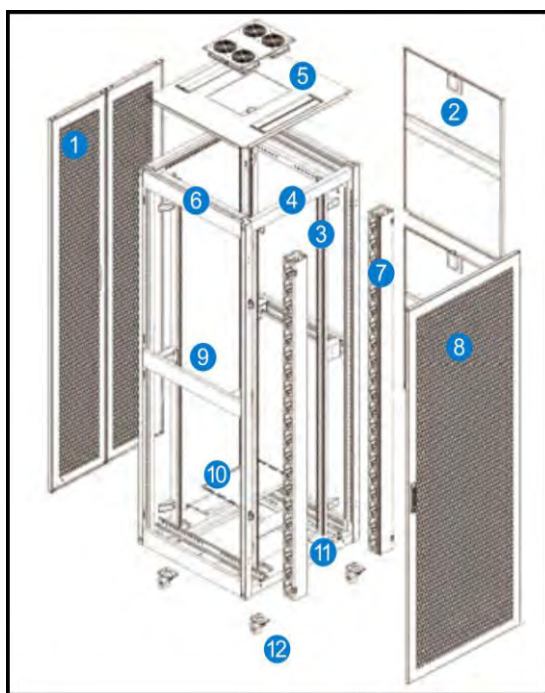

Naming rules

VE ■ ■ ■ ■ 00

DeHnition of color: 0-RAL7035; 1-RAL7021

DeHnition of rear door:

- 1-Tempered glass door with striped hole;
- 4-Sheet steel door with hexagon hole
- 5-High-density vented door
- 6-High density double opened door with damper

DeHnition of front door:

- 1-Tempered glass door with striped hole
- 4-Sheet steel door with hexagon hole
- 5-High-density vented door
- 6-High density double opened door with damper

Cabinet capacity: (U)

Cabinet depth: (MM): 6=600; 8=800; 0=1000

Cabinet width: (MM): 6=600; 8=800

Main Part					
S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Read door	1			See front&rear door type
2	Side panel	4	SPCC t1.2	Powder coated	
3	19"rails	4	T2.0	zinc-plated	
4	Front beam	2	SPCC t1.5	Powder coated	
5	Top cover	1	SPCC t1.2	Powder coated	
6	Side frame	2	SPCC t1.2	Powder coated	
7	Cable management slot	2	SPCC t1.0	Powder coated	Only used for 800 width cabinet
8	Front door	1			See front&rear door type
9	Mounting spacer	4	T2.0	zinc-plated	Only used for 800 width cabinet
10	Bottom	1	SPCC t1.0	Powder coated	
11	Caster tray	2	SPCC t2.0	Powder coated	
12	2" heavy duty castor	4			

Hardware kits with cabinet:					
A	M12 adjustable feet	4	Steel	zinc-plated	Height:100MM
B	M6 screw & nuts	20/40	Steel	zinc-plated	40pcs for over 33U

VE cabinet types						
Company Number	Part Number.	Width (mm)	Depth(D) (mm)	Capacity (U)	Height(H) (mm)	CKD paching parts
7243101	ZCVE.6624.VESC	600	600	24	1200	3
7243102	ZCVE.6642.VESC			42	2000	
7243103	ZCVE.6824.VESC		800	24	1200	
7243104	ZCVE.6842.VESC			42	2000	
7243105	ZCVE.6042.VESC			42	2000	
7243106	ZCVE.6242.VESC		1200	42	2000	
7243107	ZCVE.8842.VESC	800	800	42	2000	4
7243108	ZCVE.8042.VESC		1000	42	2000	
7243109	ZCVE.8242.VESC		1200	42	2000	

Optional Door Types



- **Front&Rear Door** (type 1)
Tempered glass door
long-handled lock
180° Maximum opening angle;
- **Material:** Sheet steel 4MM safety glass
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL7021



- **Front&Rear Door** (type 4)
Sheet steel door with hexagon hole. Long-handled lock;
180° Maximum opening angle;
- **Material:** Sheet steel
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL7021



- **Front&Rear Door** (type 5)
High-density vented door;
Slotted surface(SW7 hexagon)
Air inlet opening>67%;
long-handled lock;
180° Maximum opening angle;
- **Material:** Sheet steel
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL7021



- **Front&Rear Door** (type 6)
High density double opened damper (SW7 hexagon) Air inlet opening>67%;
long-handled lock;
180° Maximum opening angle;
- **Material:** Sheet steel
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL7021

IDC Service Cabinet

Technical Data

■ Materials

- SPCC high quality cold rolled steel
- Thickness: Mounting profile 2.0mm
- Surface process: degreasing; phosphating; spray paint
- others: 1.2-1.5mm

■ Color

- RAL9004 (black); others could be required

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip fingerprint aluminum, and the The factory's automatic production of molds And laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The finished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- The cabinet frame is made of international advanced 14-fold profiles with special 3-way technology, which strengthens the structure and can support about 1200 KG.
- More than 65% of the heat dissipation area of the cabinet can be ensured by the mesh front single-door and rear double-door.
- The installation and disassembly of side doors is fast and convenient, which makes maintenance much easier and more efficient.
- A movable caster and fixed feet can be used simultaneously, making moving cabinets easier.
- Replaceable hinges have been installed on the door, and a rubber cover protects the top cable holes, which are flexible and safe.
- Height: 42U, 47U
- Depth: 800mm, 900mm, 1000mm, 1100mm, and 1200mm. (customized)
- The depth(25mm/unit) and inner height(1U/unit) are adjustable.
- Flexible packaging ensures cabinet storage and delivery.



■ Cable management



■ Caster tray



■ Top cover

Main Part			
NO.	ITEM	QTY	SPCCT (mm)
1	Frame	1PCS	1.5
2	Mounting angle	4PCS	1.5
3	Mounting profile	4PCS	2
4	Top cover	1PCS	1.2
5	Bottom panel	1PCS	1.5
6	Fan tray	1PCS	1.2
7	Decorative plates	4PCS	2
8	Caster	4PCS	/
9	Side panel	2PCS	1.2
10	Front door	1PCS	1.2
11	Rear door	1SET	1.2

Specification					
Company Number	Model	Width (mm)	Depth(D) (mm)	Height(mm)	U
7243128	ZCIDC.6842-2 SHSC	600	800	1975	42U
7243129	ZCIDC.6942-2 SHSC		900		
7243130	ZCIDC.6042-2 SHSC		1000		
7243131	ZCIDC.6142-2 SHSC		1100		
7243132	ZCIDC.6242-2 SHSC		1200		
7243133	ZCIDC.8842-2 SHSC	800	800	1975	42U
7243134	ZCIDC.8942-2 SHSC		900		
7243135	ZCIDC.8042-2 SHSC		1000		
7243136	ZCIDC.8142-2 SHSC		1100		
7243137	ZCIDC.8242-2 SHSC		1200		
7243138	ZCIDC.6847-2 SHSC	600	800	2175	47U
7243139	ZCIDC.6947-2 SHSC		900		
7243140	ZCIDC.6047-2 SHSC		1000		
7243141	ZCIDC.6147-2 SHSC		1100		
7243142	ZCIDC.6247-2 SHSC		1200		
7243143	ZCIDC.8847-2 SHSC	800	800	2175	47U
7243144	ZCIDC.8947-2 SHSC		900		
7243145	ZCIDC.8047-2 SHSC		1000		
7243146	ZCIDC.8147-2 SHSC		1100		
7243147	ZCIDC.8247-2 SHSC		1200		



Network Cabinet

601S Network Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- 19" rails: 2.0mm
- Casters tray: 2.0mm
- others: 1.2mm.

Color

- ZC601S ■■■■■■ ■■■■0■■■: RAL7035
- ZC601S ■■■■■■ ■■■■1■■■: RAL9004

Loading Capacity

- Static loading: 800KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip fingerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The finished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Exquisite design with precise dimension and craftsmanship.
- Several styles of front and rear door options are available.
- Adjustable feet and heavy-duty castors are available simultaneously.
- Cable entry on the top cover and bottom panel with adjustable sizes.
- Optional installation of the plinth to enable cabinet fixation, under-base cable entry/ventilation.
- Efficient and reliable cabinet connection by baying kit.
- Removable side panels to ease maintenance.



- Right-angled frame enables users to easily place the logo.



- Easily connected and removed earth cable available.



Main Part					
S/N	Specification	Qty	Material	Surface Finish	Remark
1	Read door	1			See front&rear door type
2	Side panel	2	SPCC t1.0	Powder coated	Small round lock
3	19"rails	4	SPCC t2.0	Zinc-plated	
4	Mounting angle	43927	SPCC t1.2	Powder coated	6pcs for over 33U
5	Top cover	1	SPCC t1.2	Powder coated	
6	Frame	2	SPCC t1.2	Powder coated	
7	Cable management slot	2	SPCC t1.0	Powder coated	Only used for 800 width cabinet
8	Front door	1			See front&rear door type
9	Mounting spacer	44055	SPCC t1.2	Powder coated	Only used for 800 width cabinet:
10	Bottom	1	SPCC t1.2	Powder coated	
11	Cable entry panel	4	SPCC t1.2	Powder coated	
12	2" heavy duty castor	4			
12	2" heavy duty castor	4			
Hardware kits with cabinet					
A	M12 adjustable feet	4	Steel	zinc-plated	Height:100MM
B	M6 screw & nuts	20/40	Steel	zinc-plated	40pcs for over 33U
B	Trox tooling	1	Steel	zinc-plated	

SpeciHcation						
Company Number	Part Number.	Width (mm)	Depth(D) (mm)	Capacity (U)	Height(H) (mm)	CKD paching parts
7243201	ZC601S.6615.601SNC	600	600	15	800	3
7243202	ZC601S.6620.601SNC			20	1022	
7243203	ZC601S.6624.601SNC			24	1200	
7243204	ZC601S.6629.601SNC			29	1422	
7243205	ZC601S.6633.601SNC			33	1600	
7243206	ZC601S.6638.601SNC			38	1822	
7243207	ZC601S.6642.601SNC			42	2000	
7243208	ZC601S.6647.601SNC			47	2222	
7243209	ZC601S.6815.601SNC	600	800	15	800	3
7243210	ZC601S.6820.601SNC			20	1022	
7243211	ZC601S.6824.601SNC			24	1200	
7243212	ZC601S.6829.601SNC			29	1422	
7243213	ZC601S.6833.601SNC			33	1600	
7243214	ZC601S.6838.601SNC			38	1822	
7243215	ZC601S.6842.601SNC			42	2000	
7243216	ZC601S.6847.601SNC			47	2222	
7243217	ZC601S.6938.601SNC	800	900	38	1822	3
7243218	ZC601S.6942.601SNC			42	2000	
7243219	ZC601S.6947.601SNC			47	2222	
7243220	ZC601S.6038.601SNC			38	1822	
7243221	ZC601S.6042.601SNC			42	2000	
7243222	ZC601S.6047.601SNC			47	2222	
7243223	ZC601S.8638.601SNC	800	600	38	1822	4
7243224	ZC601S.8642.601SNC			42	2000	
7243225	ZC601S.8647.601SNC			47	2222	
7243226	ZC601S.8838.601SNC			38	1822	
7243227	ZC601S.8842.601SNC			42	2000	
7243228	ZC601S.8847.601SNC			47	2222	
7243229	ZC601S.8938.601SNC			38	1822	
7243230	ZC601S.8942.601SNC			42	2000	
7243231	ZC601S.8947.601SNC	800	900	47	2222	4
7243232	ZC601S.8038.601SNC			38	1822	
7243233	ZC601S.8042.601SNC			42	2000	
7243234	ZC601S.8047.601SNC			47	2222	

Optional Door Types



- **Front&Rear Door** (type 0)
 - Tempered glass door
 - Small lock;
 - Reversible right or left handed doors;
 - Turning angle is over 180 degrees;
- **Material:** Sheet steel 5MM safety glass
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL9004



- **Front&Rear Door** (type 1)
 - Tempered glass door with striped hole. Gray decoration bar;
 - Small lock;
 - Reversible right or left handed doors;
 - Turning angle is over 180 degrees;
- **Material:** Sheet steel 5MM safety glass
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL9004



- **Front&Rear Door** (type 2)
 - Tempered glass door with net hole.
 - Gray decoration bar;
 - Lock with comfort handle ;
 - Reversible right or left handed doors;
 - Turning angle is over 180 degrees;
- **Material:** Sheet steel 5MM safety glass
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL9004



- **Front&Rear Door** (type 3)
 - Sheet steel door.
 - Small lock;
 - Reversible right or left handed doors;
 - Turning angle is over 180 degrees;
- **Material:** Sheet steel
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL9004



- **Front&Rear Door** (type 4)
 - Sheet steel door with hexagon hole.
 - Small lock;
 - Reversible right or left handed doors;
 - Turning angle is over 180 degrees;
- **Material:** Sheet steel
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL9004



- **Front&Rear Door** (type 5)
 - High-density vented door;
 - Slotted surface (SW7 hexagon) Air inlet opening>60%;
 - Lock with comfort handle;
 - Reversible right or left handed doors;
 - Turning angle is over 180 degrees;
- **Material:** Sheet steel
- **Surface Finish:** Powder coated
- **Color:** RAL 7035; RAL9004

PE Network Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- others: 1.2mm.
- 19" rails: 2.0mm

Color

- ZCPE ■■■■■ ■■■0■■■: RAL7035
- ZCPE ■■■■■ ■■■1■■■: RAL9004

Loading Capacity

- Static loading: 800KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip fingerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The finished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Flat packing and patent frame. Packing time is less than 20 minutes.
- Exquisite design with precise dimension and craftsmanship.
- Several styles of front and rear door options are available.
- Cable entry on the top cover and bottom panel with adjustable sizes.
- Adjustable feet and heavy-duty castors are available simultaneously.
- Cable entry on the top cover and bottom panel with adjustable sizes.
- Optional plinth installation is needed to enable cabinet fixation and under-base cable entry/ventilation.
- Efficient and reliable cabinet connection by buying kit.
- Removable side panels to ease maintenance.



■ Shelf



■ Plinth



■ Fan Units



■ M6 NCrews & nets



■ PDU



Main Part					
S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Front door	1		Powder coated	See next page
2	Frame	2	SPCC t1.2	Powder coated	
3	Side frame	2	SPCC t1.2	Powder coated	
4	Side panel	2	SPCC t1.2	Powder coated	≥ 1000 width cabinets need 4 panels
5	Rear door	1		Powder coated	See next page
6	Top cover	1	SPCC t1.2	Powder coated	
7	19"rails	4	SPCC t2.0	Powder coated	
8	Bottom	1	SPCC t1.2	Powder coated	
9	2" heavy duty castor	4			
A	M12 adjustable feet	4		v	
B	M6 Ncrew & nuts	20	Steel	Color zinc	40pcs for over 33U
C	Trox tooling	1	Steel	Color zinc	

The 600mm width cabinet can be changed to the 800mm width one, only need to put the connecting panel and 2 cable management slots. Support 19" EIA equipment.

Specification

Company Number	Part Number.	Width (mm)	Depth(D) (mm)	Capacity (U)	Height(H) (mm)	CKD packing parts
7243235	ZCPE.6615.PENC	600	600	15	800	3
7243236	ZCPE.6620.PENC			20	1000	
7243237	ZCPE.6624.PENC			24	1200	
7243238	ZCPE.6629.PENC			29	1400	
7243239	ZCPE.6633.PENC			33	1600	
7243240	ZCPE.6638.PENC			38	1800	
7243241	ZCPE.6642.PENC			42	2000	
7243242	ZCPE.6647.PENC			47	2200	
7243243	ZCPE.6815.PENC		800	15	800	3
7243244	ZCPE.6820.PENC			20	1000	
7243245	ZCPE.6824.PENC			24	1200	
7243246	ZCPE.6829.PENC			29	1400	
7243247	ZCPE.6833.PENC			33	1600	
7243248	ZCPE.6838.PENC			38	1800	
7243249	ZCPE.6842.PENC			42	2000	
7243250	ZCPE.6847.PENC			47	2200	
7243251	ZCPE.6938.PENC	900	38	1800	3	
7243252	ZCPE.6942.PENC		42	2000		
7243253	ZCPE.6947.PENC		47	2200		
7243254	ZCPE.6038.PENC		38	1800		
7243255	ZCPE.6042.PENC		42	2000		
7243256	ZCPE.6047.PENC		47	2200		
7243257	ZCPE.8638.PENC	800	600	38	1800	4
7243258	ZCPE.8642.PENC			42	2000	
7243259	ZCPE.8647.PENC			47	2200	
7243260	ZCPE.8838.PENC		800	38	1800	
7243261	ZCPE.8842.PENC			42	2000	
7243262	ZCPE.8847.PENC			47	2200	
7243263	ZCPE.8938.PENC		900	38	1800	
7243264	ZCPE.8942.PENC			42	2000	
7243265	ZCPE.8947.PENC			47	2200	
7243266	ZCPE.8038.PENC		1000	38	1800	
7243267	ZCPE.8042.PENC			42	2000	
7243268	ZCPE.8047.PENC			47	2200	

Packing dimensions: Carton width=cabinet width+40mm, Carton depth=cabinet depth+40mm, Carton height=cabinet height+90mm

TE Network Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- others: 1.2mm.
- 19" rails: 2.0mm

Color

- ZCTE. ■■■■■.■■.0■■■: RAL7035
- ZCTE. ■■■■■.■■.1■■■: RAL9004

Loading Capacity

- Static loading: 400KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip fingerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The finished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Exquisite design with precise dimension and craftsmanship.
- Within the cavity in front and back the door be style.
- Adjustable feet and heavy-duty castors are available simultaneously.
- Modular quick disassembling.
- Optional installation of the plinth to enable cabinet fixation, under-base cable entry/ventilation.
- Efficient and reliable cabinet connection by buying kit.
- Removable side panel&rear door to Quick open steel door ease maintain.



■ 19"Profile with scale, movable forward and backward.



■ 45 degree corner framework.



Main Part

S/N	Specification	Qty	Material	Surface Finish	Remark
1	Read door	1	SPCC t1.0	Powder coated	
2	Side panel	2	SPCC t1.0	Powder coated	
3	19"rails	4	SPCC t2.0	Powder coated	
4	Mounting angle	2	SPCC t1.0	Powder coated	
5	Top cover	1	SPCC t1.0	Powder coated	
6	Frame	2	SPCC t1.0	Powder coated	
8	Front door	1			Tempered glass door
8	Bottom	1	SPCC t1.0	Powder coated	
9	2" heavy duty castor	4			

Hardware kits with cabinet:

A	M12 adjustable feet	4	Steel	zinc-plated	Height:100MM
B	M6 screw & nuts	20	Steel	zinc-plated	40pcs for over 27U
C	Trox tooling	1	Steel	zinc-plated	

SpeciHcation

Company Number	Part Number.	Width (mm)	Depth(D) (mm)	Capacity (U)	Height(H)(mm)
7243269	ZCTE.6621.TENC	600	600	21	1020
7243270	ZCTE.6627.TENC			27	1290
7243271	ZCTE.6636.TENC			36	1690
7243272	ZCTE.6642.TENC			42	1955
7243273	ZCTE.6647.TENC			47	2180
7243274	ZCTE.8842.TENC	800	800	42	1955
7243275	ZCTE.8847.TENC			47	2180

Wall Mount Rack Cabinet



SE Wall Mount Rack Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel · others: 1.2mm.
- Thickness: Mounting proPle: 1.2/1.5mm

Color

- ZCSE. ■■■■■. ■■■.0■■■: RAL7035
- ZCSE. ■■■■■. ■■■.1■■■: RAL9004

Loading Capacity

- Static loading: 60KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip Pngerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The Pnished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Flat packing and patent frame, packing time is less than 5 minutes, around 1/3~1/4 assembled original volume when Sat pack.
- Cable entry on both the top cover and bottom panel.
- Steel front door, The opening direction of the door can be changed, and the turning angle of the front door is over 180 degrees.
- Different optional styles of doors.
- Wall-mounted panel, convenient for installation, locked from inside with a screw, avoiding being stolen or accidentally dropped.
- Flat side panel, easy installation.
- Installation depth of the mounting proPle can be available changed.
- 19"standard installation.



■ Threading hole with brush.



■ Circular threading hole (Ø50MM).



■ Cantilever shelf.



■ Circular threading hole (Ø50MM).

Main Part					
S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Back frame	1	SPCC t1.0	Powder coated	
2	Side frame	2	SPCC t1.0	Powder coated	
3	Top cover	1	SPCC t2.0	Powder coated	
4	Bottom	1	SPCC t1.0	Powder coated	
5	Front frame	1	SPCC t1.0	Powder coated	See next page
6	Front door	1	5MM toughed glass door/SPCC t1.2	Powder coated	Available on request
7	Side panel	2		Powder coated	
8	19"rails	2	SPCC t1.0	Powder coated	<15U Thinkness : 1.2mm >= 15U Thinkness:1.5mm
A	M6 WCreu & nuts	10	Steel	Color zinc	20pcs for over 12U
B	Trox tooling	1	Steel	Black	

SpeciHcation									
Company Number	Part Number.	RU	Width (mm)	Depth(D) (mm)	Height(H) (mm)	Volume (CBM)	20GP (PCS)	40GP (PCS)	CKD packing part
7243301	ZCSE.5406.SEWC	6	570	450	370	0.04317	672	672	1
7243302	ZCSE.5606.SEWC			600		0.05353	542	542	2
7243303	ZCSE.5409.SEWC	9	570	450	500	0.05117	567	567	1
7243304	ZCSE.5609.SEWC			600		0.05757	504	504	1
7243305	ZCSE.5412.SEWC	12	570	450	635	0.06397	453	453	1
7243306	ZCSE.5612.SEWC			600		0.06397	453	453	1
7243307	ZCSE.5415.SEWC	15	570	450	770	0.0768	378	378	1
7243308	ZCSE.5615.SEWC			600		0.0768	378	378	1
7243309	ZCSE.5418.SEWC	18	570	450	900	0.0896	324	324	1
7243310	ZCSE.5618.SEWC			600		0.0896	324	324	1
7243311	ZCSE.5422.SEWC	22	570	450	1080	0.1067	272	272	1
7243312	ZCSE.5622.SEWC			600		0.1067	272	272	1
7243313	ZCSE.5427.SEWC	27	570	450	1305	0.128	227	227	1
7243314	ZCSE.5627.SEWC			600		0.128	227	227	1

Suggestion: For overload reason, we don't suggest SE wall mount cabinet to be fully loaded on 40HQ container.

EW Wall Mount Rack Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- others: 1.0mm
- Thickness: Mounting proPle: 2.0mm

Color

- ZCEW. ■ ■ ■ ■ 0 ■ ■ ■ : RAL7035
- ZCEW. ■ ■ ■ ■ 1 ■ ■ ■ : RAL7021

Loading Capacity


- Static loading: 30KG

COMPLIANCE (Reference Standard)


- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Feature

- Knocked down and smaller packaging, easy to transport and carry.
- Cable entry on both the top cover and bottom panel.
- Front and rear frame of the specially-made structure, better stability.
- Using 13 screw sets to assemble the whole cabinet, it spends only 10mins for one person to operate.
- Wall-mounted panel, convenient for installation, locked from inside with a screw, avoiding being stolen or accidentally dropped.
- It has a pilot pin to help close the front door to avoid mismatch, and the front door can be changed to another way to open.
- The cable can be entered from the top, bottom, and back of the cabinet, suitable to every situation. The incoming cable hole is patented, can be adjusted, and has a round edge to avoid the cutting of the cable.
- The side panel can be opened in a rotated way or disassembled, having a space enough to wiring, the side panel can be locked safely from inside without the locker and key.
- Maximum bearing capacity: 30 kg.



■ Cooling fan



■ Blanking panel



■ Cantilever shelf



■ Cable management



■ M6 NCrews & nets



■ Earthing kit



■ PDU

Main Part

S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Back frame	1	SPCC t1.0	Powder coated	
2	Bottom	1	SPCC t1.0	Powder coated	
3	Top cover	1	SPCC t2.0	Powder coated	
4	Front door	1	4MM toughed glass door/SPCC t1.0	Powder coated	Small lock
5	19"rails frame	1	SPCC t2.0	Powder coated	
6	Side panel	2	SPCC t1.0	Powder coated	

SpeciHcation

Company Number	Part Number.	RU	Width (mm)	Depth(D) (mm)	Height(H) (mm)	Volume (CBM)	40GP (PCS)
7243315	ZCEW.5406.EWWC	6	540	450	327	570*215*485	550*460*340
7243316	ZCEW.5606.EWWC			600		570*165*635	550*610*340
7243317	ZCEW.5409.EWWC	9	540	450	460	500*215*590	550*460*470
7243318	ZCEW.5609.EWWC			600		590*205*615	550*610*470
7243319	ZCEW.5412.EWWC	12	540	450	593	570*205*655	550*460*605
7243320	ZCEW.5612.EWWC			600		590*205*635	550*610*605
7243321	ZCEW.5415.EWWC	15	540	450	725	570*205*790	550*460*740
7243322	ZCEW.5615.EWWC			600		630*205*745	550*610*740

SA Wall Mount Rack Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- others: 1.2mm
- ThickneWC: 19" rails: 1.2/1.5mm

Color

- ZCSA. ■ ■ ■ ■ 0 ■ ■ : RAL7035
- ZCSA. ■ ■ ■ ■ 1 ■ ■ : RAL9004

Loading Capacity

- Static loading: 60KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip Pngerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The Pnished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Welded frame, reliable structure.
- Standing or wall mounting installation.
- Adjustable feet and heavy-duty castors are optional.
- Easy mounting installation(patent).
- 19" standard installation.
- Removable side panels and side locks are optional.
- Cable entry on both the top cover and bottom panel.
- 120mm fan available.
- The turning angle of the front door is over 1 80 degrees.



Main Part

S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Front door	1	5MM toughed glass door/SPCC t1.2	Powder coated	
2	Side panel	2	SPCC t1.0	Powder coated	
3	Frame	1	SPCC t1.2	Powder coated	
4	Mounting proPle	1	SPCC t1.2	Powder coated	
5	Back panel	1	SPCC t1.0	Powder coated	
6	19"rails	4	SPCC t1.2/1.5	Powder coated	<15U ThinkneWC : 1.2mm ≥15U ThinkneWC:1.5mm
A	M6 screw&nuts	10	Steel	Color zinc	20pcs for over 12U
B	Trox tooling	1	Steel	Black	

SpeciHcation

Company Number	Part Number.	RU	Width (mm)	Depth(D) (mm)	Height(H) (mm)	Packing dimension(mm)
7243323	ZCSA.6406.SAWC	6	600	450	370	620*470*390
7243324	ZCSA.6606.SAWC			600		620*620*390
7243325	ZCSA.6409.SAWC	9	600	450	500	620*470*520
7243326	ZCSA.6609.SAWC			600		620*620*520
7243327	ZCSA.6412.SAWC	12	600	450	635	620*470*650
7243328	ZCSA.6612.SAWC			600		620*620*650
7243329	ZCSA.6415.SAWC	15	600	450	770	620*470*790
7243330	ZCSA.6615.SAWC			600		620*620*790
7243331	ZCSA.6418.SAWC	18	600	450	900	620*470*920
7243332	ZCSA.6618.SAWC			600		620*620*920
7243333	ZCSA.6422.SAWC	22	600	450	1080	620*470*1100
7243334	ZCSA.6622.SAWC			600		620*620*1100

SB Wall Mount Rack Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- Side panel: 1.0mm
- Thickness: 19" rails: 1.2/1.5mm
- others: 1.2mm

Color

- ZCSB ■■■■0■ ■: RAL7035
- ZCSB ■■■■1■ ■: RAL9004

Loading Capacity

- Static loading: 30KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip Pngerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The Pnished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Double-section welded frame structure.
- Easy operation and maintenance at the back.
- 19" standard installation.
- Removable side panels and side locks are optional and easy to install and maintain.
- 19" standard installation.
- Removable side panels and side locks are optional.
- Cable entry at the top cover and bottom panel.
- 120mm fan optional.
- Turning angle of the front door is above 180 degrees.
- Turning angle of the rear door is above 90 degrees.



Main Part

S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Front door	1	5MM toughed glass door/SPCC t1.2	Powder coated	
2	Side panel	2	SPCC t1.0	Powder coated	
3	Front frame	1	SPCC t1.2	Powder coated	
4	Back panel	1	SPCC t1.2	Powder coated	
5	19"rails	4	SPCC t1.2/1.5	Powder coated	<15U Thinkness : 1.2mm >=15U Thinkness:1.5mm
A	M6 screw&nuts	10	Steel	Color zinc	
B	Trox tooling	1	Steel	Black	20pcs for over 12U

SpeciHcation

Company Number	Part Number.	RU	Width (mm)	Depth(D) (mm)	Height(H) (mm)	Packing dimension(mm)
7243335	ZCSB.6506.SBWC	6	600	550	370	620*570*390
7243336	ZCSB.6509.SBWC	9	600	550	500	620*570*520
7243337	ZCSB.6512.SBWC	12	600	550	635	620*570*650
7243338	ZCSB.6515.SBWC	15	600	550	770	620*570*790
7243339	ZCSB.6518.SBWC	18	600	550	900	620*570*920
7243340	ZCSB.6522.SBWC	22	600	550	1080	620*570*1100

SQ Wall Mount Rack Cabinet

Technical Data

Materials	Color	Loading Capacity
· SPCC Cold Rolled Steel · others: 1.0mm	· ZCSQ ■■■■■ ■■■0■■■: RAL7035	· Static loading: 50KG
· Thickness: Mounting proPle: 1.2/1 .5mm	· ZCSQ ■■■■■ ■■■1■■■: RAL9004	

COMPLIANCE (Reference Standard)

· Comply with ANSI/EIA RS-310-D	· IEC60297-2	· DIN41494; PART1; DIN41494; PART7.
---------------------------------	--------------	-------------------------------------

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip Pngerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The Pnished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Welded frame, reliable structure.
- Standing or wall mounting installation.
- Easy mounting installation (patent).
- 19" standard installation.
- Removable side panels and side locks are optional.
- Cable entry on both the top cover and bottom panel.
- 120mm fan available.
- The turning angle of the front door is over 180 degrees.




■ Circular threading hole (Ø50MM)



■ Cantilever shelf.



■ Blanking panel



■ Cooling fan



Main Part

S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Frame	1	SPCC t1.0	Powder coated	
2	Side panel	2	SPCC t1.0	Powder coated	
3	Front door	1	5MM toughed glass door/SPCC t1.2		
4	19" rails	4	SPCC t1.2/1.5	Powder coated	<15U Thinkness : 1.2mm ≥15U Thinkness:1.5mm
A	M6 screw&nuts	10	Steel	Color zinc	20pcs for over 12U
B	Trox tooling	1	Steel	Black	

SpeciHcation

Company Number	Part Number.	RU	Width (mm)	Depth(D) (mm)	Height(H) (mm)	40GP (PCS)
7243341	ZCSQ.5406.SQWC	6	540	450	315	560*470*330
7243342	ZCSQ.5606.SQWC			600		560*620*330
7243343	ZCSQ.5409.SQWC	9	540	450	450	560*470*470
7243344	ZCSQ.5609.SQWC			600		560*620*470
7243345	ZCSQ.5412.SQWC	12	540	450	580	560*470*600
7243346	ZCSQ.5612.SQWC			600		560*620*600
7243347	ZCSQ.5415.SQWC	15	540	450	715	560*470*730
7243348	ZCSQ.5615.SQWC			600		560*620*730
7243349	ZCSQ.5420.SQWC	20	540	450	935	560*470*950
7243350	ZCSQ.5425.SQWC	25		600	1160	560*470*1180

VA Wall Mount Rack Cabinet

Technical Data

Materials

- SPCC Cold Rolled Steel
- others: 1.0mm
- Thickness: Mounting prople: 2.0mm

Color

- ZCVA. ■■■■0■■■: RAL7035
- ZCVA. ■■■■1■■■: RAL7021

Loading Capacity

- Static loading: 30KG

COMPLIANCE (Reference Standard)


- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Feature

- Disassembled and small packaging, easy to deliver and carry.
- Special design front and back frames are with good stability.
- 16 screws are needed to assemble the whole enclosure.
It will take only 10 minutes to assemble the enclosure in one person.
- Front door is with corrective structure to avoid door dropping.
- Opening direction could be changed easily.
- Cable entries are available on the top, bottom, and back of the enclosure, suitable for different places.
- The patented cable entries are adjustable and the design prevents wires from scratching.
- The opening direction of enclosures can be changed quickly.
Automatic locking ensures safety and reliability.
- Maximum bearing capacity: 30 kg.



■ Cooling fan



■ Blanking panel



■ Cantilever shelf



■ Cable management



■ M6 NCrews & nets



■ Earthing kit



■ PDU

Main Part					
S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Back frame	1	SPCC t1.0	Powder coated	
2	Top cover	1	SPCC t1.0	Powder coated	
3	Bottom	1	SPCC t1.0	Powder coated	
4	Front door	1	4MM toughed glass door/SPCC t1.0	Powder coated	Small lock
5	19"rails frame	2	SPCC t2.0	Powder coated	
6	Side panel	2	SPCC t1.0	Powder coated	

SpeciHcation							
Company Number	Part Number.	RU	Width (mm)	Depth(D) (mm)	Height(H) (mm)	Volume (CBM)	40GP (PCS)
7243351	ZCVA.5406.VAWC	6	540	450	327	570*280*440	550*460*350
7243352	ZCVA.5606.VAWC			600		570*310*545	550*610*350
7243353	ZCVA.5409.VAWC	9	540	450	460	600*265*490	550*460*480
7243354	ZCVA.5609.VAWC			600		600*310*530	550*610*480
7243355	ZCVA.5412.VAWC	12	540	450	593	600*265*625	550*460*610
7243356	ZCVA.5612.VAWC			600		600*290*625	550*610*610
7243357	ZCVA.5415.VAWC	15	540	450	725	600*265*760	550*460*750
7243358	ZCVA.5615.VAWC			600		600*290*760	550*610*750



Racks



605 Data Racks

Technical Data

Materials	Color	Loading Capacity
· SPCC Cold Rolled Steel · others: 1.2mm	· ZC605. ■■■■■ ■■■0■■■: RAL7035	· Static loading: 250KG
· Column: 1.5mm	· ZC605. ■■■■■ ■■■1■■■: RAL9004	

COMPLIANCE (Reference Standard)

· Comply with ANSI/EIA RS-310-D	· IEC60297-2	· DIN41494; PART1; DIN41494; PART7.
---------------------------------	--------------	-------------------------------------

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip Pngerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The Pnished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Modular design, easily assemble and disassemble for delivery, low-cost.
- Various optional accessories according to requirements (cable managementslot, removable working panel, etc.,)



■ L bracket(customized)



■ Trim plate(customized)



■ Cantilever shelf



Main Part					
S/N	SpeciKcation	Qty	Material	Surface Finish	Remark
1	Column	4	SPCC t1.5	Powder coated	
2	Plinth	4	SPCC t1.5	Powder coated	
3	Support Cross beam	2	SPCC t2.0	Powder coated	
4	2" heavy duty castor	4			
A	M6 screw & nuts	20	Steel	Colour zinc	40pcs for over 33U
B	Trox tooling	1	Steel	Black	

SpeciHcation						
Company Number.	Part Number.	RU	Width (mm)	Depth(D)(mm)	Height(H) (mm)	Volume (CBM)
7245101	ZC605.6629.00. ■00	29	600	600	1422	1420*260*140
7245102	ZC605.6633.00. ■00	33	600	600	1600	1600*260*140
7245103	ZC605.6638.00. ■00	38	600	600	1822	1820*260*140
7245104	ZC605.6642.00. ■00	42	600	600	2000	2000*260*140
7245105	ZC605.6647.00. ■00	47	600	600	2222	2220*260*140

The packing information is for the Sat pack and we suggest to use this Sat pack to get signiPcant cost saving.



606 Open Racks

Technical Data

Materials

- SPCC Cold Rolled Steel
- others: 2.0mm
- Column: 1.5mm

Color

- ZC605. ■■■■■ ■■■0■■■: RAL7035
- ZC605. ■■■■■ ■■■1■■■: RAL9004

Loading Capacity

- Static loading: 250KG

COMPLIANCE (Reference Standard)

- Comply with ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494; PART1; DIN41494; PART7.

Quality advantages of cabinet products

- Our cabinet products are made of high-quality SPCC thick cold-rolled steel plates, processed by advanced condensation technology, and have excellent compression and seismic resistance;
- The surface is galvanized with square hole-resistant strip Pngerprint aluminum, and the The factory's automatic production of molds and laser cutting make the products stable, exquisite and delicate;
- With a complete art production chain, each part of the product is degreasing, pickling, phosphating, and electrostatic spraying, which greatly improves the product's quality. Anti-oxidation and anti-corrosion ability;
- The Phished product has undergone strict quality inspection, screening and control, and fully meets the above-mentioned standards to ensure that Zion's products must be exquisite.

Feature

- Modular design, easily assemble and disassemble for delivery, low-cost.
- Various optional accessories according to requirements (cable managementslot, removable working panel, etc.,)



■ Double Sided Shelf



■ Cantilever shelf



■ Cable management



Main Part					
S/N	SpeciHcation	Qty	Material	Surface Finish	Remark
1	Column	2	SPCC t1.5	Powder coated	
2	Plinth	2	SPCC t2.0	Powder coated	
3	Support Cross beam	2	SPCC t2.0	Powder coated	
4	2" heavy duty castor	4			
A	M6 screw & nuts	20	Steel	Colour zinc	40pcs for over 33U
B	Trox tooling	1	Steel	Black	

SpeciHcation						
Company Number.	Part Number.	RU	Width (mm)	Depth(D) (mm)	Height(H) (mm)	Volume (CBM)
7245106	ZC606.6629.00. ■00	29	600	600	1422	1420*260*140
7245107	ZC606.6633.00. ■00	33	600	600	1600	1600*260*140
7245108	ZC606.6638.00. ■00	38	600	600	1822	1820*260*140
7245109	ZC606.6642.00. ■00	42	600	600	2000	2000*260*140
7245110	ZC606.6647.00. ■00	47	600	600	2222	2220*260*140



Cabinet fitting



Wall Mount Bracket

Zion's Hot Selling Type

19" WALL MOUNT BRA

- Black powder painted steel construction.
- Wall mount 19"bracket.
- Standard spacing and threading.
- Front dimensions by standard.
- EIA Soft cable proteceion grommets.
- Color: BLACK / GREY .



Main Part

Model No.	Description
7245201	2U-6"DP
7245202	3U-6"DP
7245203	4U-6"DP
7245204	4U-12"DP
7245205	7U-12"DP


WALL MOUNT BRACKETS COVER

- Used for wall mount bracket.
- Material: SPCC cold rolled steel.
- Color: BLACK / GREY .



Main Part

Model No.	Description
7245201-A	6"DP
7245201-B	12"DP

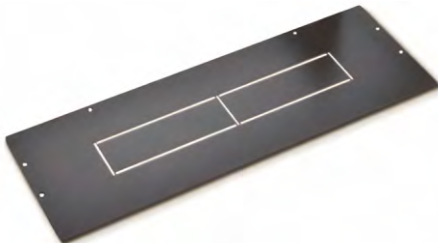

PDU

Zion's Hot Selling Type

Zion Code	Description		Zion Code	Description	
7245301	1U 3 way Cabinet PDU with 3P air circuit breaker 250V, 10A Universal		7245302	1U 6 way Cabinet PDU with Switch 250V, 10A Universal	
7245303	1U 6 way Cabinet PDU with Switch and 3D Light 250V, 10A Universal		7245304	1U 8 way Cabinet PDU with Switch and Overload protection 250V, 10A Universal	
7245305	1U 8 way Cabinet PDU with Switch and Overload protection 250V, 10A Universal		7245306	1U 6 way Cabinet PDU with Switch, Single lighting protection and USB 250V, 10A Universal	
7245307	1U 6 way Cabinet PDU with Power Light and 1P air circuit breaker 250V, 10A Universal		7245308	1U 6 way Cabinet PDU with Earth Leakage protection 250V, 16A Universal	
7245309	1U 6 way Cabinet PDU with Earth Leakage protection and Power Light 250V, 16A Universal		72453010	1U 8 way Cabinet PDU with Switch and Overload protection 250V, 16A Universal	
72453011	1U 3 way Cabinet PDU with Switch 250V, 16A Universal		72453012	1.5U 6 way Cabinet PDU with Earth Leakage protection 250V, 16A Universal	
72453013	1U 12 way Cabinet PDU with Power Light 250V, 13A UK		72453014	1.5U 6 way Cabinet PDU with Switch and Overload protection and 3D Light 250V, 13A UK	
72453015	1U 6 way Cabinet PDU with Switch and Overload protection 250V, 13A UK		72453016	1U 8 way Cabinet PDU with 250V, 13A UK	
72453017	1U 7 way Cabinet PDU with Switch and Overload protection 250V, 13A UK		72453018	1U 8 way Cabinet PDU with Switch and Overload protection 125V, 15A UL	

Zion's Hot Selling Type

Zion Code	Description		Zion Code	Description	
72453019	1.5U 9 way Cabinet PDU with Switch 125V, 15A UL		72453020	1.5U 10 way Cabinet PDU with Overload protection 125V, 15A UL	
72453021	1.5U 12 way Cabinet PDU with Switch 125V, 15A UL		72453022	1U 6 way Cabinet PDU with Switch and Overload protection and USB 125V, 15A UL	
72453023	1U 10 way Cabinet PDU with Switch IEC 250V, 10A C13		72453024	1U 8 way Cabinet PDU with Switch IEC 250V, 10A C13	
72453025	1U 6 way Cabinet PDU with Switch and Overload protection 250V, 16A France		72453026	1.5U 8 way Cabinet PDU 250V, 16A France	
72453027	1U 12 way Cabinet PDU with Switch and Overload protection 250V, 16A German		72453028	1U 8 way Cabinet PDU with Switch and Overload protection 250V, 16A German	
72453029	1.5U 6 way Cabinet PDU with Switch and 3D Light 250V, 16A German		ZC-1U08-K-L-ITA	1U 8 way Cabinet PDU with Switch & Power Light, Italy	

Cooling

2/4 Fan Units

- Only for Zion cabinet, enable ventilation and reliable operation.
- Easy-to-disassemble enable convenient operation.
- Full series of optional switch, can control fans singly.

Parameter

Fan size:	Cable length:
120 × 120 × 38	1.9M
Input frequency:	Period:
100~231V/50Hz	-10°C~+50°C
Material:	Cable length:
SPCC cold rolled steel	72454 : RAL7035 /RAL9004



Main Part

Model No.	Description	Input connector type
7245401	2 fans	UK type(BS1363)
7245402	2 fans	German type(DIN49441)
7245403	2 fans	US type(NEMA 5-15P)
7245404	4 fans	UK type(BS1363)
7245405	4 fans	German type(DIN49441)
7245406	4 fans	US type(NEMA 5-15P)

Cooling Fan

- For the network cabinet, adjust the inner temperature.
- Performance reference.

Parameter

Fan size:	
120 × 120 × 38	
Atmosphere Runoff:	
50CFM	
Noise:	Periode:
24.9dB	-10°C~+50°C



Main Part

Model No.	Description	Input (V)	Axletree Type
7245501	AC fans	220V	Oiliness Axletree

Shelf

Cantilever Shelf Without Holes

■ Used for 19 inch network cabinet and rack.

Parameter

Material:	Cable length:
SPCC cold rolled steel	72455 ■ ■ : RAL7035/RAL9004

Main Part

Model No.	Description	Input (V)
7245502	2U-10" DP	22Kg.[48Lb]
7245503	2U-16" DP	22Kg.[48Lb]



Double Sided Shelf (2U)


■ Used for 19"open rack, 2U height.

Parameter

Material:	Cable length:
SPCC cold rolled steel	72455 ■ ■ : RAL7035/RAL9004

Main Part

Model No.	Description	Input (V)
7245504	2U-19" DP	50Kg.[110Lb]

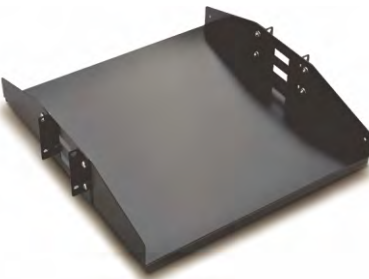

Fixed Shelf

■ Only for ZION COMMUNICATION cabinet, install from side.

Parameter

Static load capacity:

90Kg [198Lb]

Material:

SPCC cold rolled steel

Cable length:

72455 ■ ■ : RAL7035/RAL9004



Main Part

Model No.	Shelf size MM		Use
	Width	Depth	
7245505	485	300	450MM wall box
7245506	485	450	600MM wall box
7245507	485	350	600MM cabinet
7245508	485	550	800MM cabinet
7245509	485	620	900MM wall box
7245510	485	720	1000MM wall box

Cantilever Shelf With Holes

■ Used for 19 inch network cabinet and rack.


Parameter

Material:

SPCC cold rolled steel

Cable length:

72455 ■ ■ : RAL7035/RAL9004

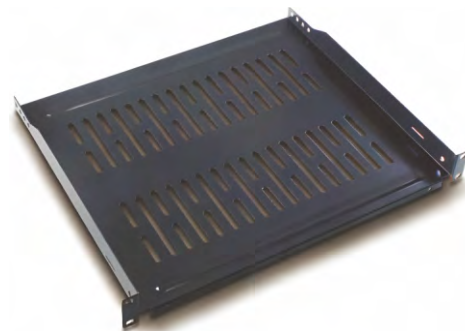

Main Part

Model No.	Description	Capacity
7245511	1U-6" DP	5Kg.[11Lb]
7245512	1U-10" DP	10Kg.[22Lb]
7245513	2U-12" DP	22Kg.[48Lb]
7245514	2U-14" DP	22Kg.[48Lb]
7245515	2U-16" DP	22Kg.[48Lb]
7245516	2U-18" DP	22Kg.[48Lb]
7245517	3U-16" DP	36.3Kg.[80Lb]
7245518	3U-18" DP	36.3Kg.[80Lb]

Keyboard

- Used for 19 inch network cabinet.
- Keyboard width is no more than 400MM.
- Sliding shelf could elongate to 260MM.

Parameter

Material:	Cable length:
SPCC cold rolled steel	72455 ■ ■ : RAL7035/RAL9004

Main Part

Model No.	Description	Capacity
7245519	type 1	600~800MM cabinet
7245520	type 2	900~1100MM cabinet



Sliding Shelf (1U)

- Used for 19-inch network cabinet.

Parameter

Static load capacity:	
30Kg [66Lb]	
Material:	Cable length:
SPCC cold rolled steel	72455■■■ : RAL7035/RAL9004

Main Part

Model No.	Description	Shelf size MM		Use
		Depth	Depth	
7245522	350 type	440	350	600~800MM cabinet
7245523	550 type	440	550	900~1100MM cabinet



Cable Manager

Zion's Hot Selling Type

Zion Code	Description		Zion Code	Description	
ZCCMJ606 (7245601)	1u cable manager 5 rings (metal).		ZCCMJ606B (7245602)	2u cable manager 5 rings (metal).	
ZCCMJ606-1 (7245603)	1u cable manager 4 rings (metal).		ZCCMJ606-1B (7245604)	2u cable manager 4 rings (metal).	
ZCCMJ606-5V2H (7245605)	Cable manager 7 rings (Metal).		ZCCMJ606-4 (7245606)	Brush panel.	
ZCCMJ606-2 (7245607)	Cable manager (Metal Cover).		ZCCMJ606-8 (7245608)	Cable manager (Metal).	
ZCCMJ606-9 (7245609)	2U cable manager (plastic), Single side		ZCCMJ606-10 (7245610)	2U cable manager (plastic), double side	
ZCCMJ606-13 (7245611)	1U cable Manager (plastic+metal)		ZCCMJ606-14 (7245612)	1U Bank panel Without screw	

Drawer & Plinth

Drawer

- Used for 19 inch network cabinet and rack.

Parameter

Static load capacity: 35Kg


Sliding shelf could elongate to 450MM

Material:

SPCC cold rolled steel

Cable length:

72457 ■ ■ : RAL7035/RAL9004

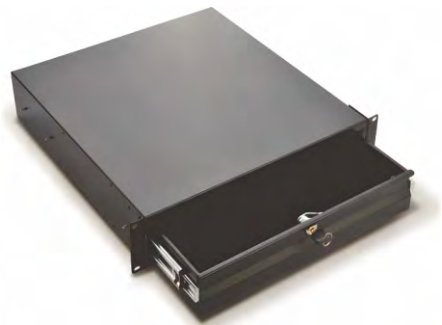

Main Part

Model No.	Description
7245713	2U-18" DP
7245714	3U-18" DP

Plinth

- Only for ZION COMMUNICATION 19" cabinet.

Parameter

Static load capacity:

1000Kg [2200Lb]

Material:

SPCC cold rolled steel

Cable length:

72457 ■ ■ : RAL7035/RAL9004



Main Part

Model No.	Shelf size MM			Use
	Width	Depth	Height	
7245701	600	600	100	601 cabinet
7245702	600	800	100	601 cabinet
7245703	600	900	100	601 cabinet
7245704	600	1000	100	601 cabinet
7245705	800	600	100	601 cabinet
7245706	800	800	100	601 cabinet
7245707	600	600	100	PE cabinet
7245708	600	800	100	PE cabinet
7245709	600	900	100	PE cabinet
7245710	600	1000	100	PE cabinet
7245711	800	600	100	PE cabinet
7245712	800	800	100	PE cabinet

TC Digital Temperature Unit

Technical Data

- 19"installation
- Simple structure, easy installation
- Easy cabling & operation
- Disturbing resistance、reliable running
- 2-way output (IEC320 C13 and NEMA 5-15R)

Main Part

Model No.	Input Connector Type
7245801	UK type(BS1363)
7245802	German type(DIN49441)
7245803	US type(NEMA 5-15P)



Technical Parameters

- Power supply: 220VAC+ 10%/-15% , 50/60Hz.
- Temperature measuring range: -50°C ~99°C.
- Resoluton: 1°C.
- Refrigeration output contact capacity: 10A/277VAC.
- Sensor error delay time: 1min.
- Safe level: 1P65.
- Operation humidity: 20~85%(no condensate).
- Power consumption: ≤3W.
- Temperature controlling range: -40°C ~50°C.
- Accuracy: -50°C ~70°C, ±1°C, ±1 °C at others can drive single phase compressor≤1/2HP.
- Sensor: NTC.
- Operation temperature: -30°C~75°C.

Screws, Nuts & Locks

10-32 Screws With Cushion



Parameter

- Phillips
- Color: Black

Main Part

Model No.	Packs of
700906004	100

M6 Screws & Nuts



Parameter

- Phillips / Trox
- Color: Zinc-plated

Main Part

Model No.	TYPE	Packs of
700906001	Trox(T30)	50
700906002	Phillips	50

M6 Cushion



Parameter

- Used for M6 screws
- Material: ABS
- Color: Black

Main Part

Model No.	Packs of
700906010	50

T30 Trox Tool



Parameter

- Used for M6 screws
- Size: Ø5.5*33*120
- Color: Zinc-plated

Main Part

Model No.	Packs of
701901001	10

Lock With Comfort Handle



Parameter

- Thickness of lock: 33MM
- Hole size: 126XØ4.5MM
- Color: Black

Main Part

Model No.	Packs of
701102020	3

Small Lock



Parameter

- Thickness of lock: 20MM
- Hole size: Ø19X16.5MM

Main Part

Model No.	Packs of
701101020	50

M12 Adjustable Feet



Parameter

- Static load capacity: 250kg
- Color: Black/ Zinc-plated

Main Part

Model No.	Height MM	Pack of
700712000	100	4

Active Optical Components

- 800G OSFP
- 400G OSFP
- 100G QSFP28
- 40G QSFP+
- 10G SFP+
- 1.25G SFP
- Copper Transceiver
- Active Optical Cable (AOC)
- Direct Attach Cable(DAC)




Passive Optical Components

- Fiber Optic Splice Closure
- Fiber Optical Terminal Box
- Fiber Optic Patch Panel
- Fiber Optic Patch Cord/Pigtail
- MTP/MPO
- WDM Multiplexers
- Fiber Optic Splitter
- Fiber Optic Connector
- Fiber Optic Adapter
- Fiber Optic Attenuator
- Fiber Optic Cable Fittings



Copper Cabling Infrastructure

- Bulk Ethernet Cables
- Copper Patch Cord
- Copper Patch Panel
- Keystone Jacks
- Ethernet / RJ45 Coupler
- RJ45 Modular Plug
- Free Pressure Toolless plug
- Network Faceplate
- RJ45 Surface Box
- Copper Trunk Cables
- Networking Tools & Accessories

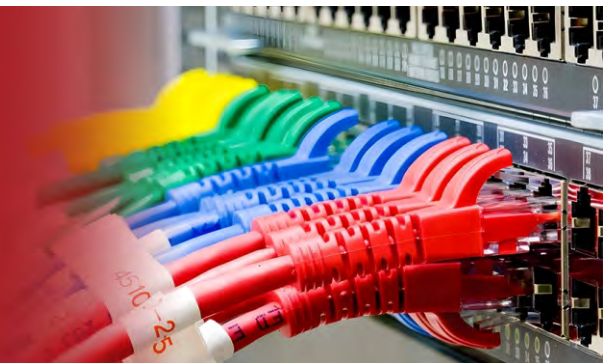

Cabinet and Racks

- Server/Network Rack Cabinet
- Wall Mount Rack Cabinet
- Racks
- Cabinet Fitting



Frequently Asked Questions

■ HOW CAN I GET CUSTOMIZED PRODUCTS?

Customizing products is one of ZION Communication's top strengths. We are happy to develop the desired products that exactly fit your needs. Contact our sales team and provide as much detail as possible about your specific requirements, and we will find a solution that works for you.

■ HOW YOUR PRODUCTS ARE PACKAGED?

We always strive to deliver all products to the client in new condition. Most of our products are packed in double carton boxes. We can deliver more oversized items, such as cabinets, using a combination of cartons and pallets. Depending on the model, up to a certain number, your label and the printing of the carton are customizable.

■ HOW LONG WILL IT TAKE FOR ME TO RECEIVE MY ORDER?

Delivery time varies depending on the order. Most of our orders (90%) will be shipped within 10 days, of receiving the deposit, and only a few orders may take 20 days or longer. Delivery times for specific orders need to be confirmed by you and our sales staff.

■ WHAT ARE ZION COMMUNICATION'S PAYMENT TERM?

For new customers, usually do 30% downpayment by T/T and balance T/T before shipping or L/C at sight. Zion Communication may be able to agree to more flexible terms with regular customers or customers with special large orders or products. If you have any questions or concerns pertaining to payment, please contact us and our sales manager who services you.

■ HOW DO I PLACE AN OEM OR CUSTOMIZED ORDER?

- 1) Send your purchase intention to us.
- 2) Our sales team will contact you to confirm the product specifications, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

■ HOW DO I BECOME A DISTRIBUTOR?

If you are in the telecom industry and have a proven track record of success in your local market, you can apply to become a distributor in your area. If you are interested in becoming a distributor for our brand “ **signal**” and “ **ZION**”, please contact us via email with your company information and a next 3-year business plan.

 GLOBAL MARKETwww.hello-signal.com

■ China - Head office

Email: sales@hello-signal.com

Mobile/WhatsApp: 0086 15715730101

ADD: Zion Industrial Park, Huacjiao Road,
Jincheng, Lin'an, Zhejiang, China, 311300