# 10G SFP+ ER 1550nm 40KM LC SMF Fiber Optic Transceiver

## Zion Code and Description

| Zion Code | Zion Description |
|---|---|
| 7213030 | 10G SFP+ ER 1550nm 40KM LC SMF Fiber Optic Transceiver |

## Applications

- 10GBASE-ER/EW 10G Ethernet

## Features

- Hot-pluggable SFP+ footprint
- Up to 11.3Gpbs rates
- Single 3.3V power supply
- Maximum link length of 40km
- 1550nm EML transmitter, PIN photo-detector
- Duplex LC connector
- Power dissipation < 1.5W
- Built-in digital diagnostic functions
- Case temperature range：Commercial: 0°C to +70°C  Industrial: -40°C to +85°C

## STANDARD

- Compliant with SFF-8472 SFP+ MSA.
- Compliant to SFP+ SFF-8431 and SFF-8432.
- Compliant to 802.3ae 10GBASE-ER.
- RoHS Compliant.

## Description

7213030 10G SFP+ ER  compatible SFP+ transceiver supports up to 40Km link lengths over SMF via an LC duplex connector. Digital diagnostics monitoring is available via a 2-wire serial interface, as specified in SFF-8472. Each SFP+ transceiver module is individually tested to be used on a series of Cisco switches, routers, servers, network interface card (NICs) etc. Featuring low power consumption, high speed, this 10G SFP+ transceiver is ideal for data center, enterprise wiring closet, service provider transport application, Radio & Baseband Unit, etc

## Main product parameters

| | | | |
|---|---|---|---|
| Form Factor | SFP+ | Vendor Name | Zion Communication |
| Wavelength | 1550nm | Max Data Rate | 11.3 Gbps |
| Max Cable Distance | 40km | Connector type | Duplex LC |
| Fiber cable Type | SMF | | |
| Transimitter Type | EML | Receiver Type | PIN |
| Transmit Power | -1~4 dBm | Receiver sensitivity | - 16 dBm |
| DDM | Supported | Operating Temp. | 0°C to 70°C (32°F to 158°F) |

## Zion Communication's Hot 10G transceiver types

| Zion Code | Zion Description |
|---|---|
| 7213010 | 10G SFP+ SR 850nm 300M LC MMF Fiber Optic Transceiver |
| 7213020 | 10G SFP+ LR 1310nm 10KM LC SMF Fiber Optic Transceiver |
| 7213030 | 10G SFP+ ER 1550nm 40KM LC SMF Fiber Optic Transceiver |
| 7213040 | 10G SFP+ ZR 1550nm 80KM LC SMF Fiber Optic Transceiver |
| 7213050 | 10G SFP+ BIDI LR 1270/1330nm 10KM LC SMF Fiber Optic Transceiver |
| 7213060 | 10G SFP+ BIDI LR 1270/1330nm 20KM LC SMF Fiber Optic Transceiver |
| 7213070 | 10G SFP+ BIDI ER 1270/1330nm 40KM LC SMF Fiber Optic Transceiver |
| 7213080 | 10G SFP+ BIDI ER 1270/1330nm 60KM LC SMF Fiber Optic Transceiver |
| 7213090 | 10G SFP+ BIDI ZR 1490/1550nm 80KM LC SMF Fiber Optic Transceiver |
| 7213110 | 10G SFP+ CWDM 10KM LC SMF Fiber Optic Transceiver |
| 7213120 | 10G SFP+ CWDM 20KM LC SMF Fiber Optic Transceiver |
| 7213130 | 10G SFP+ CWDM 40KM LC SMF Fiber Optic Transceiver |
| 7213140 | 10G SFP+ CWDM 80KM LC SMF Fiber Optic Transceiver |
| 7213210 | 10G SFP+ DWDM 40KM LC SMF Fiber Optic Transceiver |
| 7213220 | 10G SFP+ DWDM 80KM LC SMF Fiber Optic Transceiver |

# Detailed product specifications

## 1 Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typical | Max. | Unit | Ref. |
|---|---|---|---|---|---|---|
| Storage Temperature | Ts | -40 | | 85 | °C | |
| Storage Ambient Humidity | HA | 5 | | 85 | % | |
| Power Supply Voltage | VCC | -0.5 | | 4 | V | |
| Signal Input Voltage | | -0.3 | | Vcc+0.3 | V | |
| Receiver Damage Threshold | | 4 | | | dBm | |

## 2 Recommended Operating Conditions

| Parameter | Symbol | Min. | Typical | Max. | Unit | Ref. |
|---|---|---|---|---|---|---|
| Operating Case Temperature | Tcase | 0 | | 70 | °C | Note (1) |
| Ambient Humidity | HA | 5 | | 85 | % | |
| Power Supply Voltage | VCC | 3.14 | 3.3 | 3.46 | V | |
| Power Supply Current | ICC | | | 450 | mA | |
| Power Supply Noise Rejection | | | | 100 | mVp-p | 100Hz to 1MHz |
| Transmission Distance | | | | 40 | km | |
| Coupled fiber | Single mode fiber | | | | | ITU-T G.653 |

**Note:** -10 to 60degC with 1.5m/s airflow

## 3 Optical Characteristics

| Parameter | Symbol | Min. | Typical | Max. | Unit | Ref. |
|---|---|---|---|---|---|---|
| **Transmitter** | | | | | | |
| Average Launched Power | PO | -1 | | 4 | dBm | Note (1) |
| Extinction Ratio | ER | 8.2 | | | dB | |
| Center Wavelength | λc | 1530 | 1550 | 1565 | nm | |
| Spectrum Band Width (RMS) | σ | | | 1 | nm | |
| SMSR | | 30 | | | dB | |
| Transmitter OFF Output Power | POff | | | -30 | dBm | |
| Transmitter and Dispersion Penalty | TDP | | | 2 | dB | |
| Output Eye Mask | Compliant with IEEE 0802.3ae | | | | | |
| **Receiver** | | | | | | |
| Input Optical Wavelength | λ | 1270 | | 1610 | nm | |
| Receiver Sensitivity | | | | -16 | dBm | Note (2) |
| Input Saturation Power (Overload) | Psat | 0 | | | dBm | |
| LOS Detect -Assert Power | PA | -28 | | | dBm | |
| LOS Detect - Deassert Power | PD | | | -19 | dBm | |
| LOS Detect Hysteresis | PHYS | 0.5 | 1 | | dB | |

**Note:**
1.Launched power (avg.) is power coupled into a single mode fiber with master connector.（Before of Life）
2.Measured with conformance test signal for BER = 10^−12.@10.3125Gbps, PRBS=2^31-1,NRZ

## 4 Electrical Interface Characteristics

| Parameter | Symbol | Min. | Typical | Max. | Unit | Ref. |
|---|---|---|---|---|---|---|
| **Transmitter** | | | | | | |
| Differential line input Impedance | RIN | | 100 | | Ohm | |
| Differential Data Input Swing | VDT | 300 | | 700 | mVp-p | |
| Transmit Disable Voltage | Vdis | 2 | | Vcc | V | LVTTL |
| Transmit Enable Voltage | Ven | Vee | | Vee+ 0.8 | V | |
| **Receiver** | | | | | | |
| Differential Data Output Swing | VDR | 400 | | 850 | mVp-p | Note (1) |
| LOS Output Voltage-High | VLOSH | Vee | | Vee+0.8 | V | LVTTL |
| LOS Output Voltage-Low | VLOSL | 2 | | VccHOST | V | |

**Note:** Into 100Ω differential termination.

## 5 Pin Descriptions

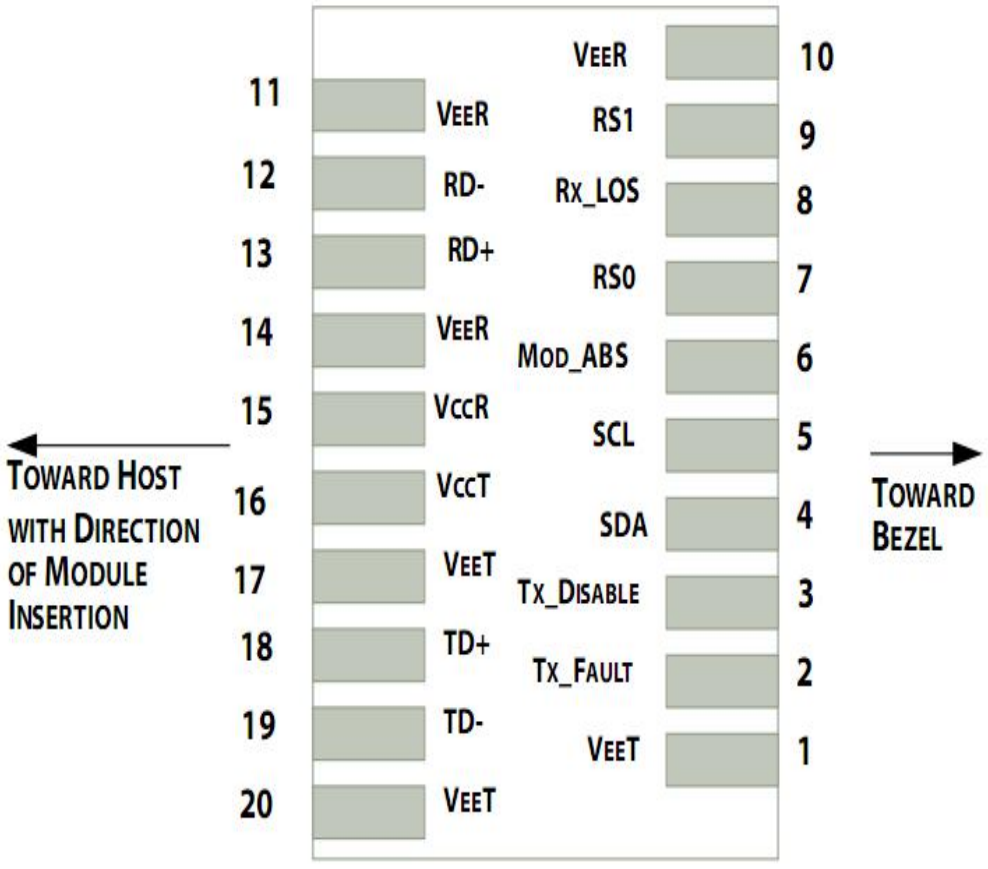

## 6 Transceiver Block Diagram

| Pin | Symbol | Name/Description | NOTE |
|---|---|---|---|
| 1 | $V_{EET}$ | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | $T_{FAULT}$ | Transmitter Fault. | 2 |
| 3 | $T_{DIS}$ | Transmitter Disable. Laser output disabled on high or open. | 3 |
| 4 | SDA | 2-wire Serial Interface Data Line | 4 |
| 5 | SCL | 2-wire Serial Interface Clock Line | 4 |
| 6 | MOD_ABS | Module Absent. Grounded within the module | 4 |
| 7 | RS0 | Rate Select 0 | 5 |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation. | 6 |
| 9 | RS1 | No connection required | 1 |
| 10 | $V_{EER}$ | Receiver Ground (Common with Transmitter Ground) | 1 |
| 11 | $V_{EER}$ | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled | |
| 13 | RD+ | Receiver Non-inverted DATA out. AC Coupled | |
| 14 | $V_{EER}$ | Receiver Ground (Common with Transmitter Ground) | 1 |
| 15 | $V_{CCR}$ | Receiver Power Supply | |
| 16 | $V_{CCT}$ | Transmitter Power Supply | |
| 17 | $V_{EET}$ | Transmitter Ground (Common with Receiver Ground) | 1 |
| 18 | TD+ | Transmitter Non-Inverted DATA in. AC Coupled. | |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled. | |
| 20 | $V_{EET}$ | Transmitter Ground (Common with Receiver Ground) | 1 |

**Note:**
1.Circuit ground is internally isolated from chassis ground.
2.TFAULT is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V.A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3.Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
4.Should be pulled up with 4.7kΩ- 10kΩ host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
5.Internally pulled down per SFF-8431 Rev 4.1.
6.LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## 7 Recommended Interface Circuit

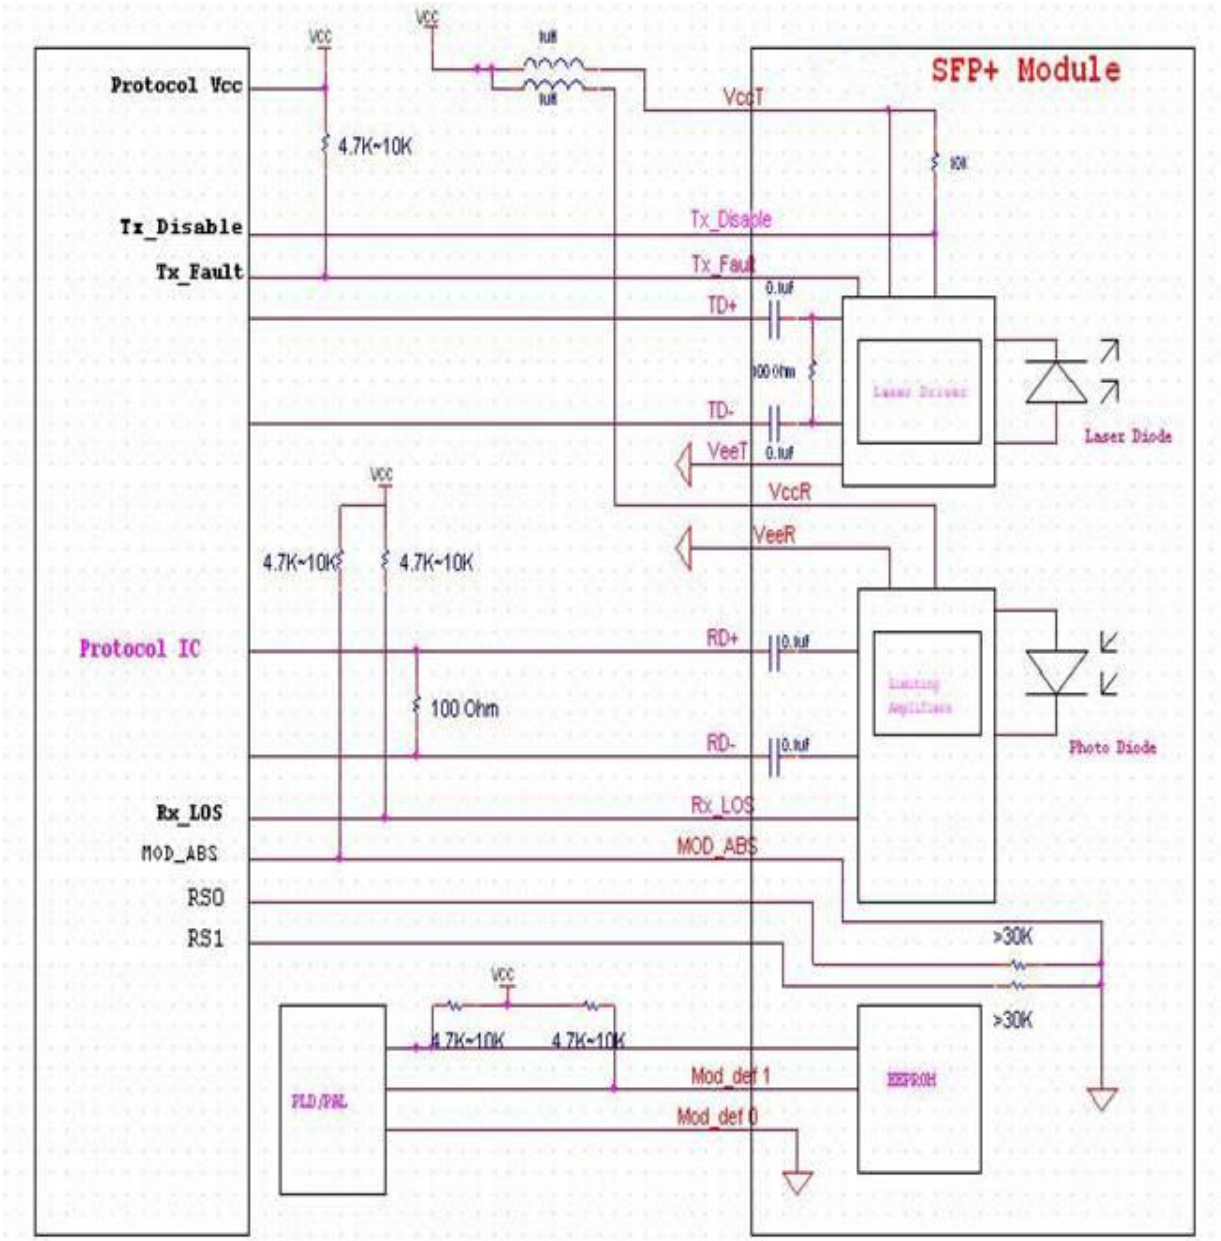

## 8 Outline Dimensions

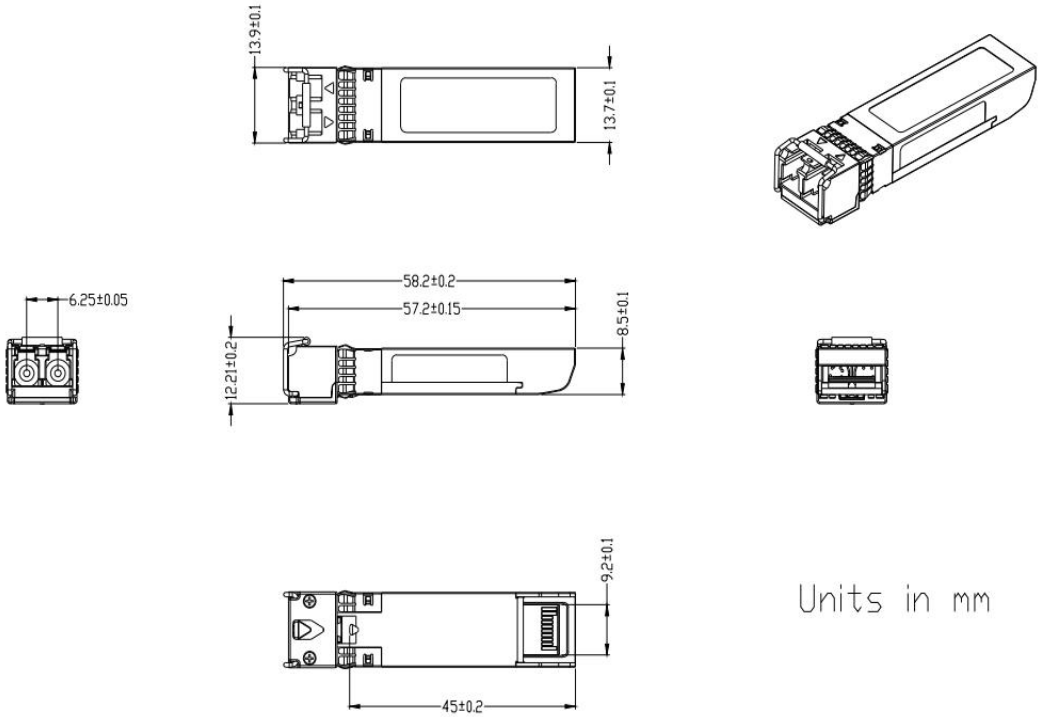


## 9 Regulatory Compliance

| Feature | Reference | Performance |
|---|---|---|
| Electrostatic discharge（ESD） | IEC/EN 61000-4-2 | Compatible with standards |
| Electromagnetic Interference (EMI) | FCC Part 15 Class B EN 55022 Class B (CISPR 22A) | Compatible with standards |
| Laser Eye Safety | FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2 | Class 1 laser product |
| Component Recognition | IEC/EN 60950, UL | Compatible with standards |
| ROHS | 2002/95/EC | Compatible with standards |
| EMC | EN61000-3 | Compatible with standards |