Toolless Plug

RJ45 FTP CAT6 TOOLLESS PLUG
ZC-G40S-4-C6

TYPE:

CAT6 RJ45 shielded toolless plug
Colour: Silver
Rohs, reach compliant

CABLE MATCHED:

Soild and stranded
22AWG/23AWG/24AWG

ELECTRICAL:

Contact resistance:	20m ohm
Insulation resistance:	<= 250m ohm @100 v DC
Withstand voltage:	DC1000V AC700V RMS 60HZ, IMIN
Cat6a permanent link:	Conform to ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

Storage:	-40°/ +70°
Operation:	-10°/ +60°

Toolless Plug

MECHANICAL:

Shielded material:	Zinc alloy
Plastic material:	New pc
Gold pins:	Phosphor bronze, gold plating 3u''
Terminal pins:	Phosphor bronze, zin plating
Rj45 contact life:	750 times min
IDC terminal life:	250 times min



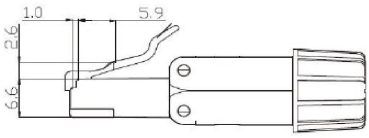






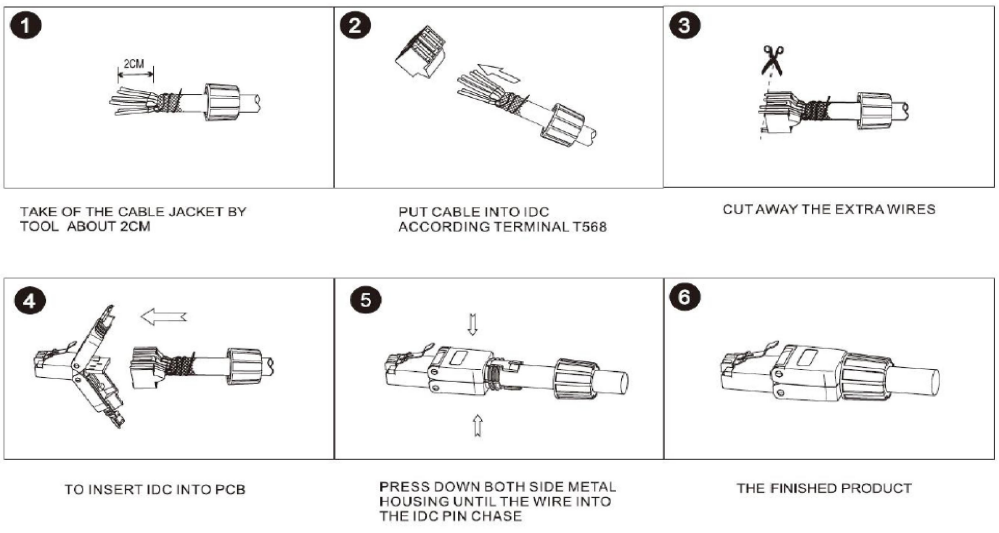
CAT6/CAT6A SHIELDED TOOLLESS PLUG INSTRUCTION MANUAL